



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
252008-207
 Component
Gasoline Engine
 Fluid
NAPA 5W30 (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0077742	GFL0065066	GFL0047407
Sample Date		Client Info		13 May 2024	19 Sep 2023	07 Jun 2022
Machine Age	mls	Client Info		428986	411618	377898
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		Changed	Not Changd	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	56	45	77
Chromium	ppm	ASTM D5185m	>20	2	2	3
Nickel	ppm	ASTM D5185m	>5	2	<1	2
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>40	8	3	13
Lead	ppm	ASTM D5185m	>50	<1	0	<1
Copper	ppm	ASTM D5185m	>155	7	6	16
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	13	12	13
Potassium	ppm	ASTM D5185m	>20	4	2	2
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	16.3	12.2	16.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	29.8	23.0	28.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>400	3	3	6
Boron	ppm	ASTM D5185m		33	63	75
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		76	70	74
Manganese	ppm	ASTM D5185m		4	<1	1
Magnesium	ppm	ASTM D5185m		498	573	532
Calcium	ppm	ASTM D5185m		971	990	989
Phosphorus	ppm	ASTM D5185m		589	638	578
Zinc	ppm	ASTM D5185m		711	755	712
Sulfur	ppm	ASTM D5185m		2580	2780	2431
Oxidation	Abs/.1mm	*ASTM D7414	>25	29.3	20.0	28.9
Base Number (BN)	mg KOH/g	ASTM D2896		2.3	3.7	4.0
Visc @ 100°C	cSt	ASTM D445		9.4	9.3	10.6

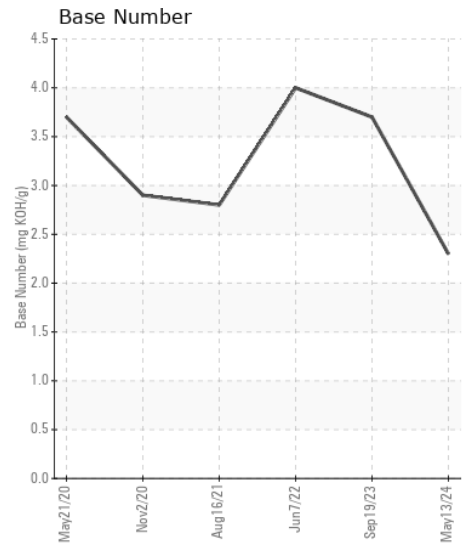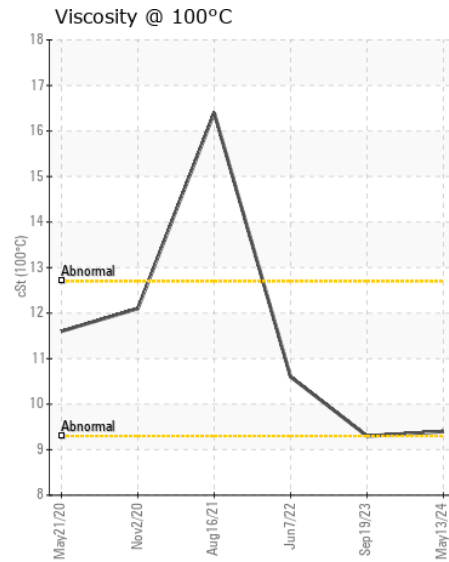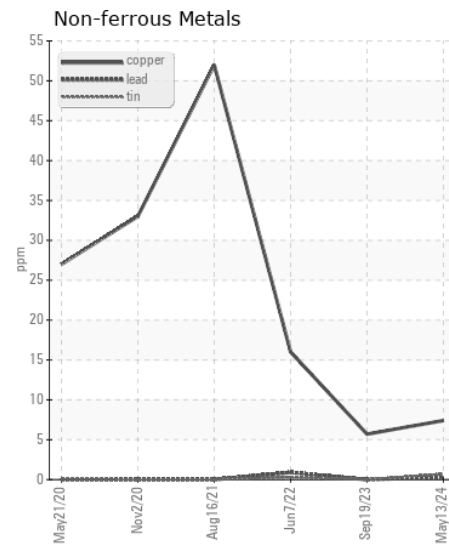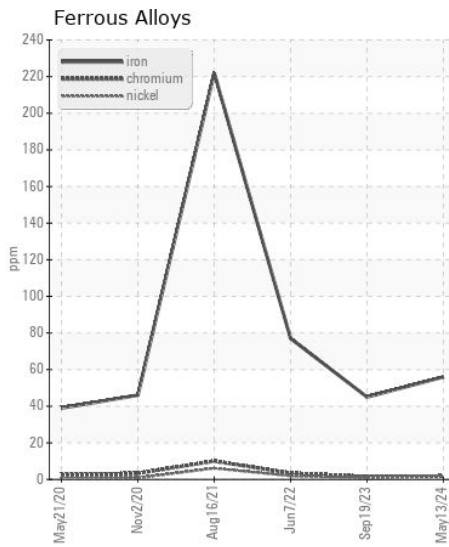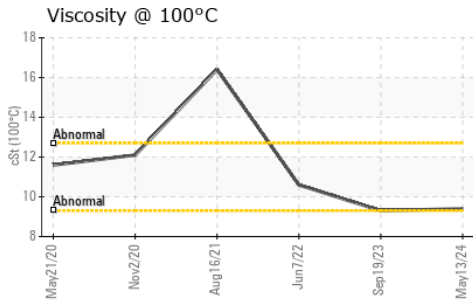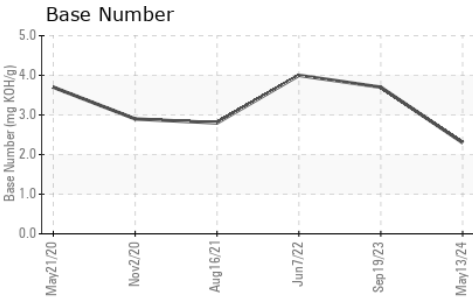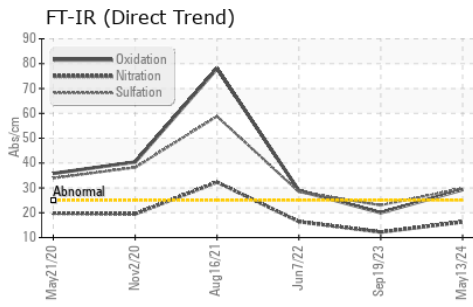

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0077742
Lab Number : 06178209
Unique Number : 11029535
Test Package : FLEET

Received : 13 May 2024
Tested : 14 May 2024
Diagnosed : 15 May 2024 - Sean Felton

GFL Environmental - 650 - West Point Hauling
 7825 Parham Landing Road
 West Point, VA
 US 23181
 Contact: Jason Smith
 jasonsmith@gflenv.com
 T: (804)843-9288
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)