



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**Pillen Family Farms**  
 Machine Id  
**LSTK51**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>SBP0006889</b>	SBP0006805	SBP0005328
Sample Date		Client Info		<b>02 May 2024</b>	15 Apr 2024	05 Feb 2024
Machine Age	mls	Client Info		<b>12000</b>	12000	12000
Oil Age	mls	Client Info		<b>0</b>	0	12000
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Filter Changed		Client Info		<b>Not Chngd</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>90	<b>11</b>	12	22
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	2
Lead	ppm	ASTM D5185m	>40	<b>2</b>	3	2
Copper	ppm	ASTM D5185m	>330	<b>0</b>	0	<1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>2</b>	3	5
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	2
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>6	<b>0.7</b>	0.6	0.6
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.3</b>	9.1	9.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.3</b>	20.9	20.8
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	2	2
Boron	ppm	ASTM D5185m	0	<b>0</b>	0	2
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>58</b>	67	67
Manganese	ppm	ASTM D5185m		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m	0	<b>951</b>	1179	1048
Calcium	ppm	ASTM D5185m		<b>1078</b>	1242	1106
Phosphorus	ppm	ASTM D5185m		<b>1008</b>	1195	1096
Zinc	ppm	ASTM D5185m		<b>1238</b>	1526	1347
Sulfur	ppm	ASTM D5185m		<b>3321</b>	4104	3300
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.2</b>	15.9	16.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	<b>7.2</b>	7.2	7.3
Visc @ 100°C	cSt	ASTM D445	14	<b>13.8</b>	13.8	13.6

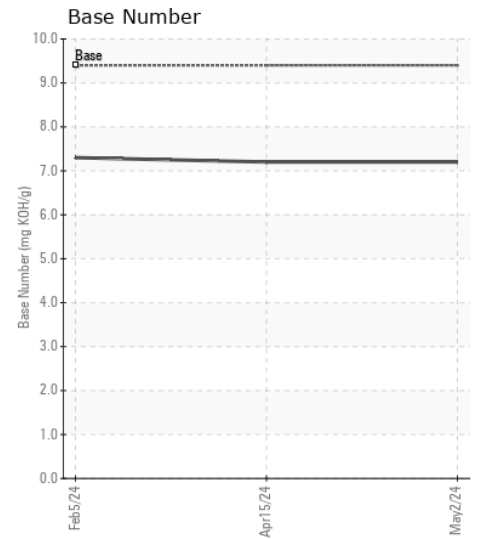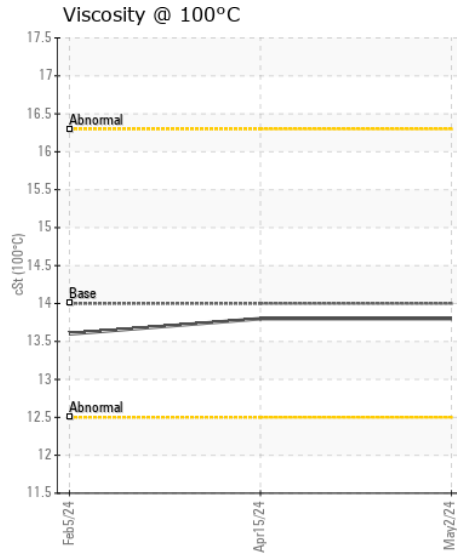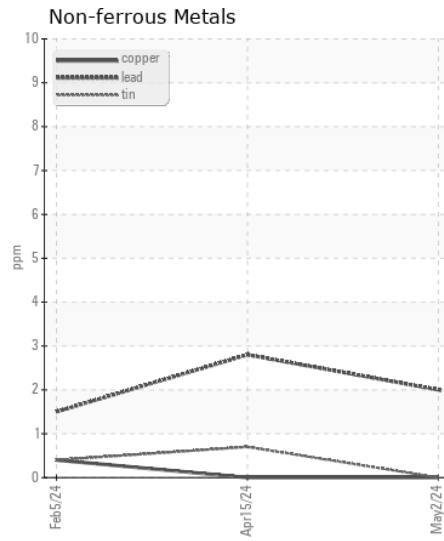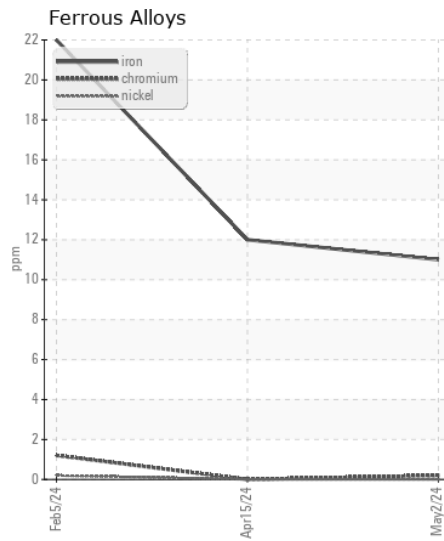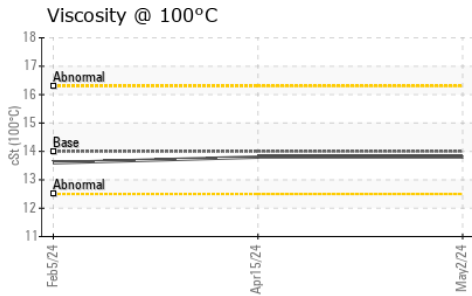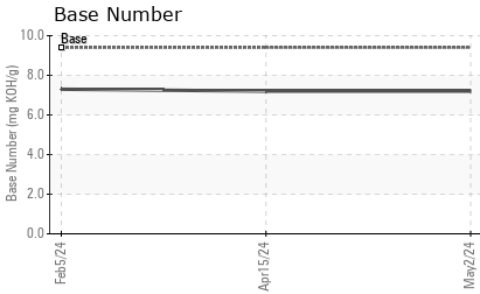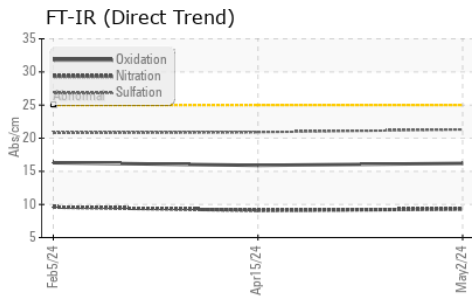

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0006889 **Received** : 13 May 2024  
**Lab Number** : 06178243 **Tested** : 14 May 2024  
**Unique Number** : 11029569 **Diagnosed** : 15 May 2024 - Sean Felton  
**Test Package** : FLEET

**Pillen Family Farms - 722828**  
 26741 NE-91  
 Humphrey, NE  
 US 61357  
 Contact: Troy Runge  
 troyfr@pillenfamilyfarms.com  
 T: (308)390-6733  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)