



# VOLVO

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area  
**[SPM702779 GA PACIFIC]**  
 Machine Id  
**VOLVO L150H 7091**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP443714	VCP426430	VCP443590
Sample Date		Client Info		30 Apr 2024	12 Apr 2024	15 Mar 2024
Machine Age	hrs	Client Info		6804	6091	5645
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	3	3	5
Chromium	ppm	ASTM D5185m	>20	0	0	<1
Nickel	ppm	ASTM D5185m	>5	0	0	1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>30	<1	<1	4
Lead	ppm	ASTM D5185m	>40	0	<1	3
Copper	ppm	ASTM D5185m	>20	<1	<1	2
Tin	ppm	ASTM D5185m	>20	0	<1	2
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

### CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	2	2	8
Potassium	ppm	ASTM D5185m	>20	0	0	4
Fuel		WC Method	>6.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	7.2	6.3	6.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.8	18.4	18.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	2	<1	0
Boron	ppm	ASTM D5185m	250	0	0	1
Barium	ppm	ASTM D5185m	10	0	0	<1
Molybdenum	ppm	ASTM D5185m	100	61	58	63
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	450	1050	979	974
Calcium	ppm	ASTM D5185m	3000	1126	1057	1146
Phosphorus	ppm	ASTM D5185m	1150	1099	1032	1124
Zinc	ppm	ASTM D5185m	1350	1291	1191	1242
Sulfur	ppm	ASTM D5185m	4250	3763	3634	3217
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.9	14.3	14.7
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	9.3	9.7	9.3
Visc @ 100°C	cSt	ASTM D445	14.4	13.0	13.1	13.2

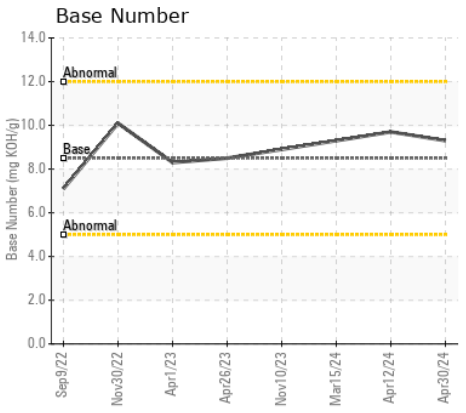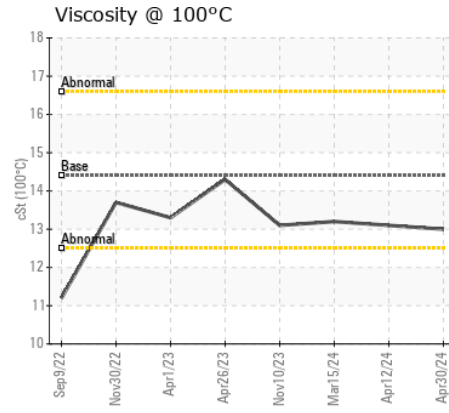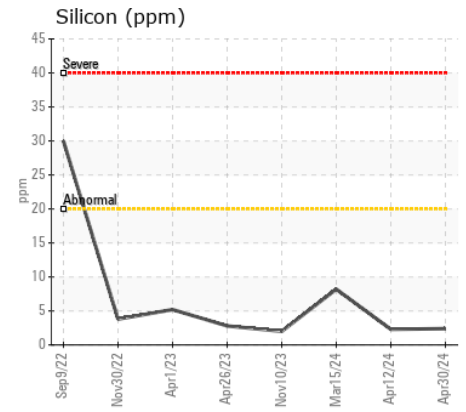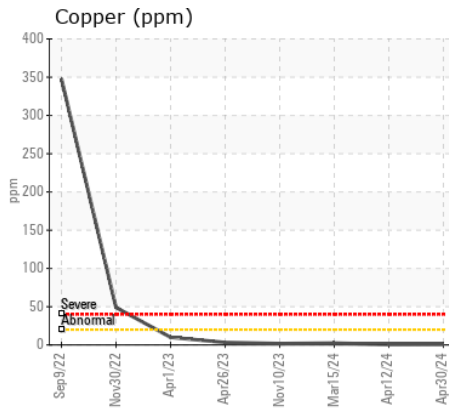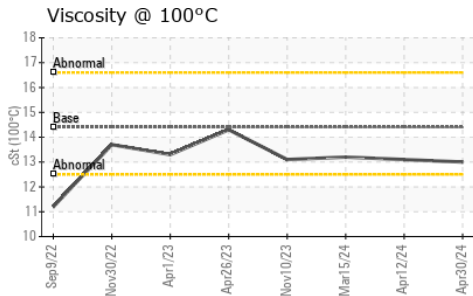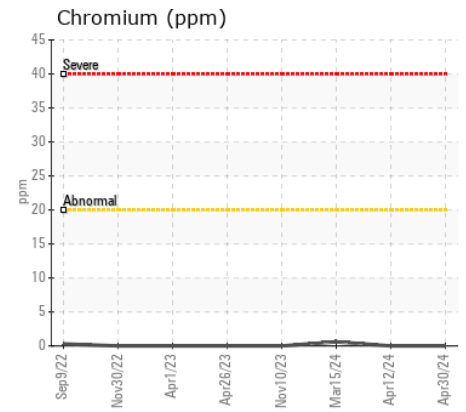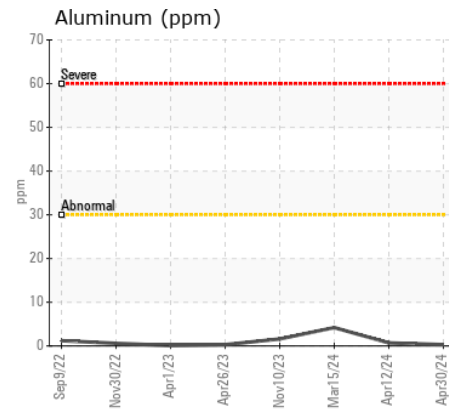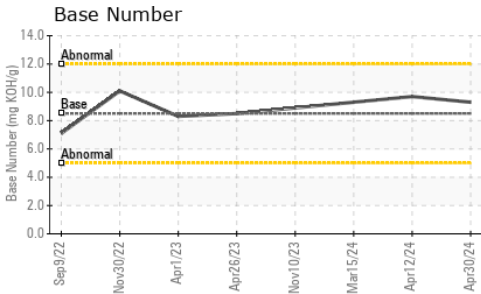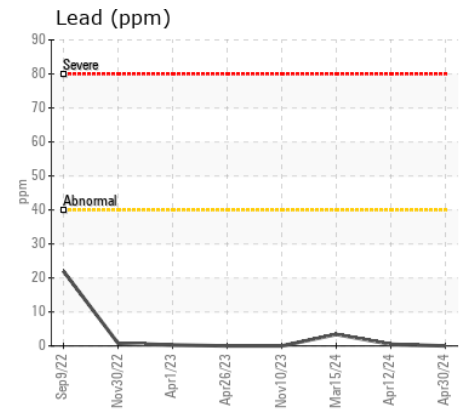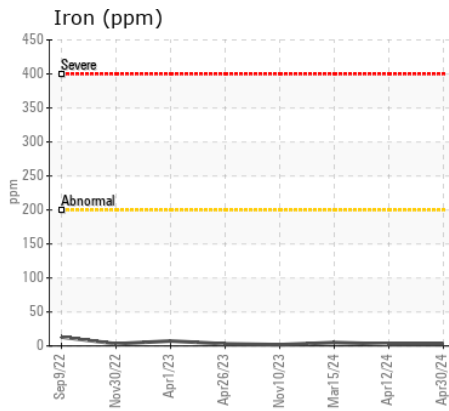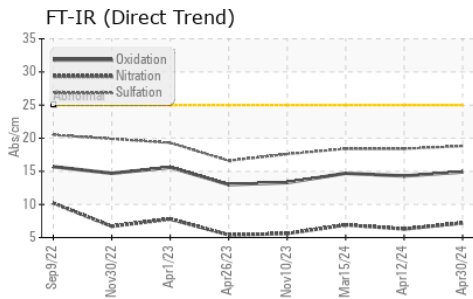

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP443714 **Received** : 14 May 2024  
**Lab Number** : 06178289 **Tested** : 14 May 2024  
**Unique Number** : 11029615 **Diagnosed** : 14 May 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**ALTA EQUIPMENT CO - ORLAND PARK**  
 5000 INDUSTRIAL HWY  
 GARY, IN  
 US 46406  
 Contact: DAVE ENG  
 DAVE.ENG@ALTG.COM  
 T: (312)350-2560  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)