



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**723031-303001**  
Component  
**Transmission (Auto)**  
Fluid  
**PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0118824</b>	GFL0102506	GFL0098635
Sample Date		Client Info		<b>09 May 2024</b>	27 Dec 2023	20 Nov 2023
Machine Age	hrs	Client Info		<b>20791</b>	25859	19878
Oil Age	hrs	Client Info		<b>25859</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changed</b>	Not Changed	N/A
Filter Changed		Client Info		<b>Changed</b>	Changed	N/A
Sample Status				<b>NORMAL</b>	ABNORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	<b>55</b>	43	56
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>50	<b>21</b>	17	17
Lead	ppm	ASTM D5185m	>50	<b>2</b>	1	2
Copper	ppm	ASTM D5185m	>225	<b>11</b>	7	11
Tin	ppm	ASTM D5185m	>10	<b>3</b>	1	2
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**






There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>5</b>	8	5
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	2	4
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	▲ MODER	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>12</b>	5	5
Boron	ppm	ASTM D5185m		<b>64</b>	78	67
Barium	ppm	ASTM D5185m		<b>0</b>	1	0
Molybdenum	ppm	ASTM D5185m		<b>2</b>	2	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m		<b>22</b>	19	1
Calcium	ppm	ASTM D5185m		<b>132</b>	132	117
Phosphorus	ppm	ASTM D5185m		<b>242</b>	259	165
Zinc	ppm	ASTM D5185m		<b>27</b>	22	0
Sulfur	ppm	ASTM D5185m		<b>1766</b>	1601	1810
Visc @ 40°C	cSt	ASTM D445	34	<b>32.6</b>	33.1	31.5

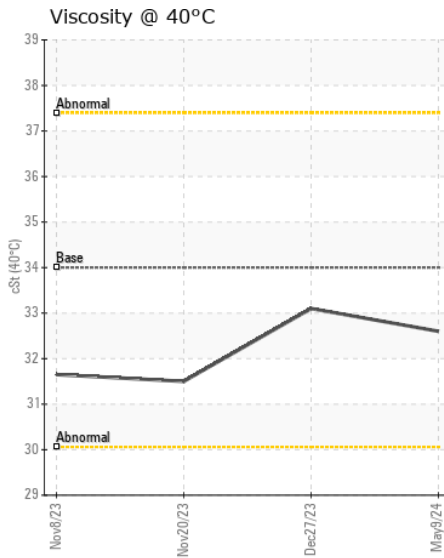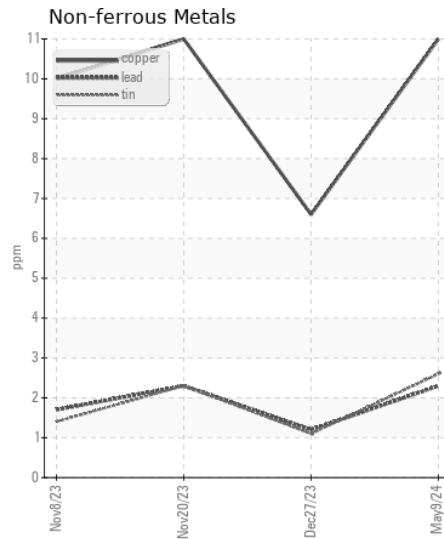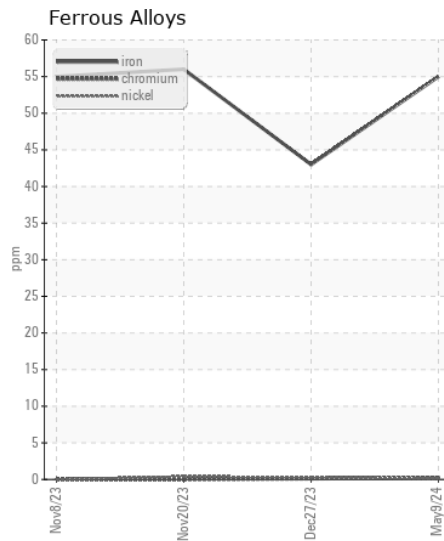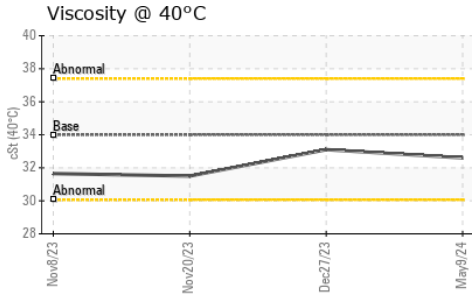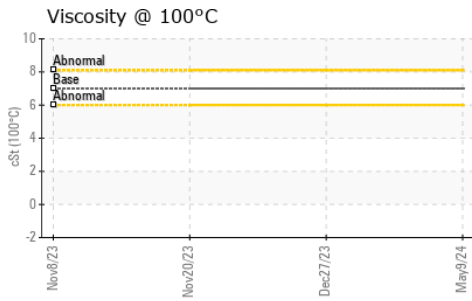

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0118824  
**Lab Number** : 06178535  
**Unique Number** : 11029861  
**Test Package** : FLEET ( Additional Tests: KV100 )

**GFL Environmental - 837 - Harrison TS**  
 22820 S State Route 291  
 Harrisonville, MO  
 US 64701  
 Contact: SARA PATRICK  
 spatrack@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: