



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 948L 1DW948LBPPF717034**  
 Component  
**Hydraulic System**  
 Fluid  
**JOHN DEERE HYDRAU (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WE0006855</b>	WE0005780	---
Sample Date		Client Info		<b>08 May 2024</b>	07 Dec 2023	---
Machine Age	hrs	Client Info		<b>1066</b>	612	---
Oil Age	hrs	Client Info		<b>0</b>	612	---
Filter Age	hrs	Client Info		<b>0</b>	612	---
Oil Changed		Client Info		<b>N/A</b>	Not Changd	---
Filter Changed		Client Info		<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	ATTENTION	---

## WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>20	<b>0</b>	<1	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	1	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>10	<b>0</b>	1	---
Lead	ppm	ASTM D5185m	>10	<b>0</b>	1	---
Copper	ppm	ASTM D5185m	>75	<b>0</b>	1	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	<b>0</b>	3	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	8	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Particles >4µm		ASTM D7647	>5000	<b>753</b>	5195	---
Particles >6µm		ASTM D7647	>1300	<b>142</b>	394	---
Particles >14µm		ASTM D7647	>160	<b>13</b>	34	---
Particles >21µm		ASTM D7647	>40	<b>4</b>	12	---
Particles >38µm		ASTM D7647	>10	<b>1</b>	2	---
Particles >71µm		ASTM D7647	>3	<b>1</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>17/14/11</b>	20/16/12	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>0</b>	<1	---
Boron	ppm	ASTM D5185m		<b>0</b>	0	---
Barium	ppm	ASTM D5185m		<b>1</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>0</b>	0	---
Magnesium	ppm	ASTM D5185m		<b>2</b>	2	---
Calcium	ppm	ASTM D5185m	87	<b>94</b>	143	---
Phosphorus	ppm	ASTM D5185m	727	<b>711</b>	774	---
Zinc	ppm	ASTM D5185m	900	<b>862</b>	1030	---
Sulfur	ppm	ASTM D5185m	1500	<b>1827</b>	2069	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	<b>0.70</b>	0.62	---
Visc @ 40°C	cSt	ASTM D445	65	<b>64.0</b>	58.2	---

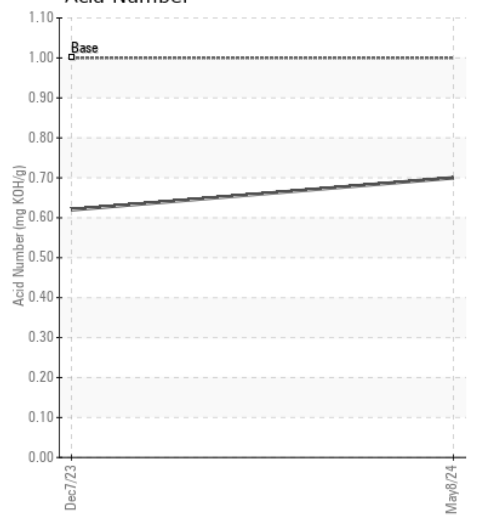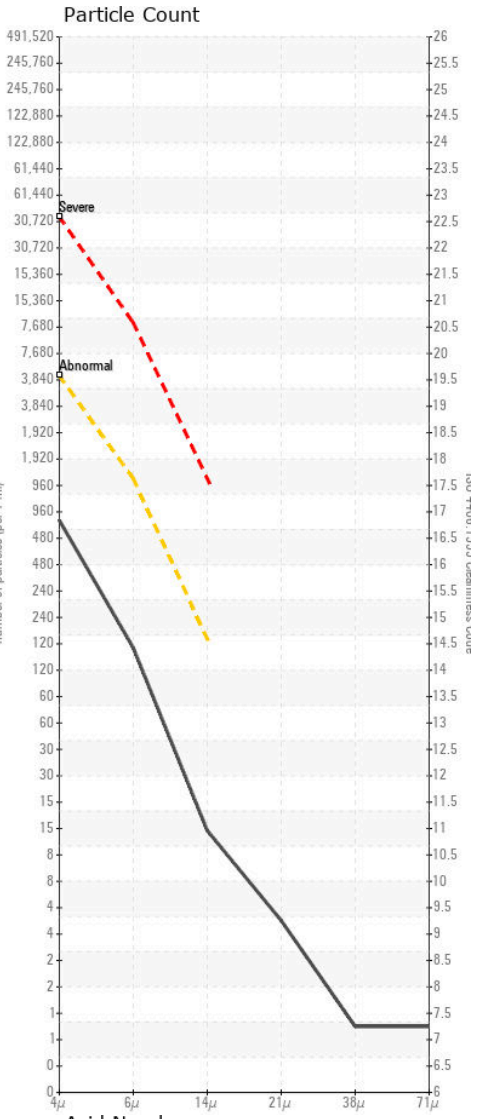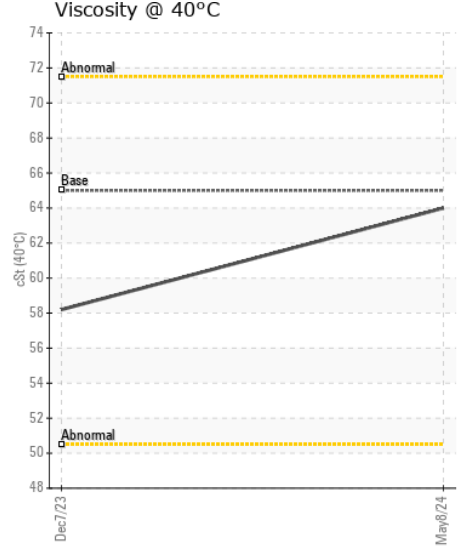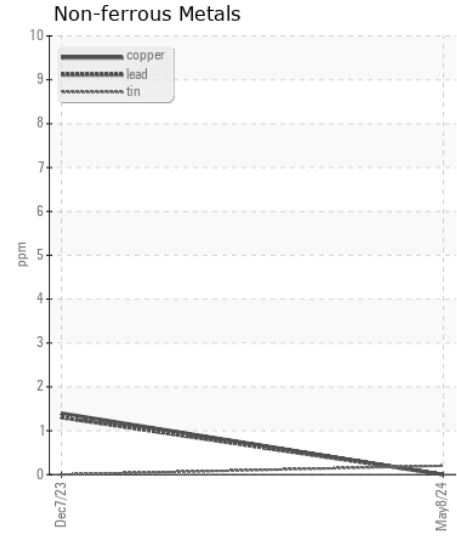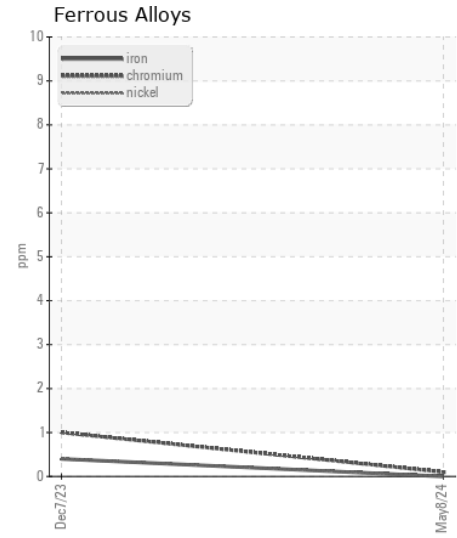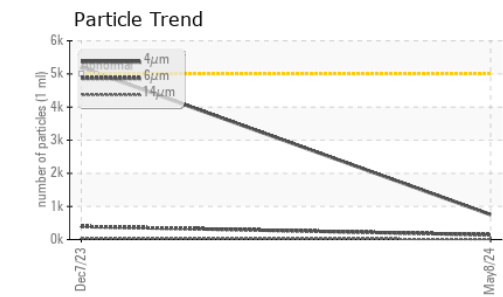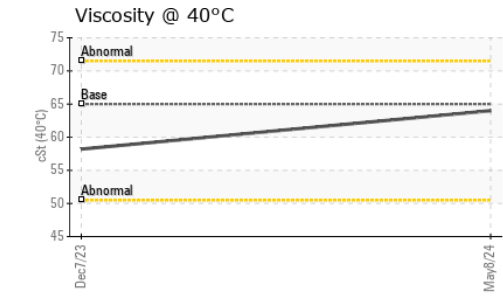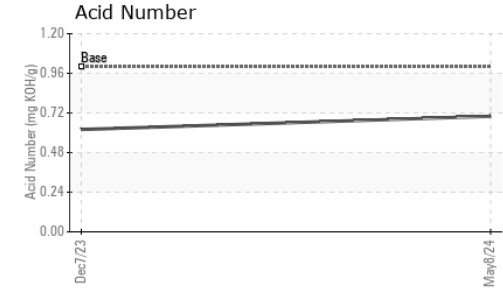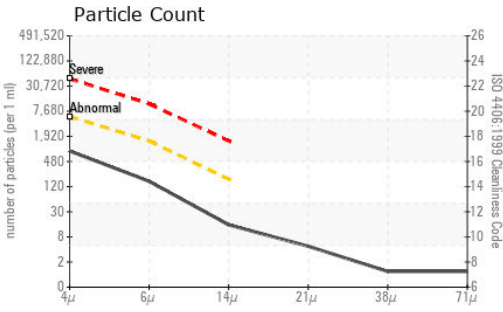

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WE0006855 **Received** : 14 May 2024  
**Lab Number** : 06178588 **Tested** : 15 May 2024  
**Unique Number** : 11029914 **Diagnosed** : 15 May 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**WARRIOR TRACTOR AND EQUIPMENT - NORTHPORT**  
 P.O. BOX 412  
 NORTHPORT, AL  
 US 35476  
 Contact: CRAIG ANDOE  
 serve01@warriortractor.com  
 T: (205)339-0300  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)