



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 750K 1T0750KXADE247641
 Component
Hydraulic System
 Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0211945	JR0164462	JR0148175
Sample Date		Client Info		06 May 2024	02 Jun 2023	13 Jan 2023
Machine Age	hrs	Client Info		8449	7969	7444
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Chngd	Changed	Not Chngd
Filter Changed		Client Info		Not Chngd	Changed	Not Chngd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	16	12	9
Iron	ppm	ASTM D5185m	>23	0	11	7
Chromium	ppm	ASTM D5185m	>9	<1	3	2
Nickel	ppm	ASTM D5185m	>5	0	0	<1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	5	0
Aluminum	ppm	ASTM D5185m	>9	2	4	3
Lead	ppm	ASTM D5185m	>28	0	0	<1
Copper	ppm	ASTM D5185m	>51	0	4	3
Tin	ppm	ASTM D5185m	>5	<1	2	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>31	6	11	6
Potassium	ppm	ASTM D5185m	>20	0	<1	2
Water		WC Method	>0.075	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>80000	28329	31334	23780
Particles >6µm		ASTM D7647	>20000	439	676	532
Particles >14µm		ASTM D7647	>640	9	21	10
Particles >21µm		ASTM D7647	>160	2	5	3
Particles >38µm		ASTM D7647	>40	0	0	0
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>23/21/16	22/16/10	22/17/12	22/16/10
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	<1	2	1
Boron	ppm	ASTM D5185m		398	286	223
Barium	ppm	ASTM D5185m		1	<1	0
Molybdenum	ppm	ASTM D5185m		81	141	100
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		375	594	408
Calcium	ppm	ASTM D5185m		1318	1306	1020
Phosphorus	ppm	ASTM D5185m		935	814	567
Zinc	ppm	ASTM D5185m		1016	990	706
Sulfur	ppm	ASTM D5185m		3277	3411	2213
Acid Number (AN)	mg KOH/g	ASTM D8045		1.71	1.47	1.84
Visc @ 40°C	cSt	ASTM D445	117	93.5	81.8	86.5

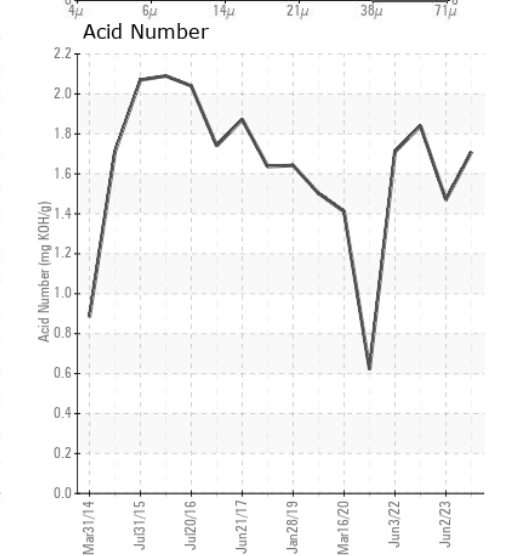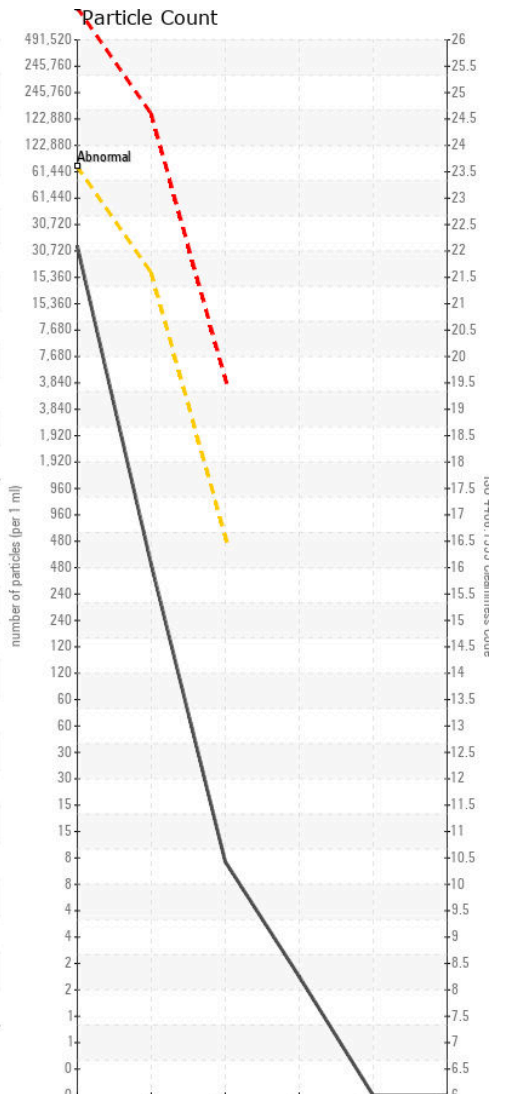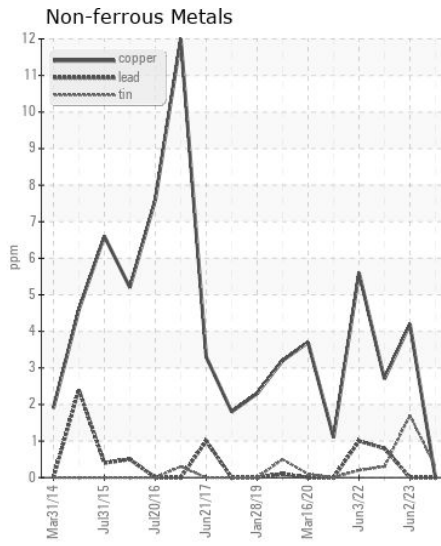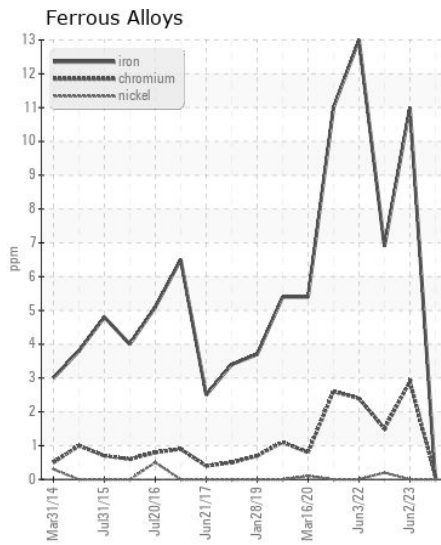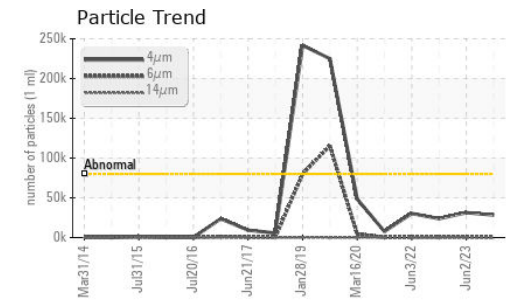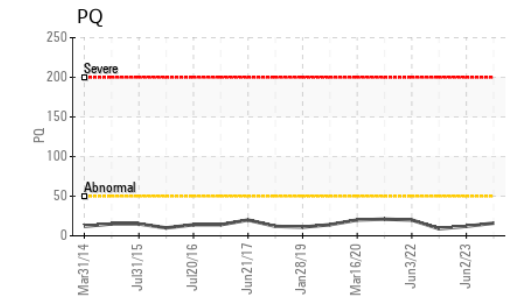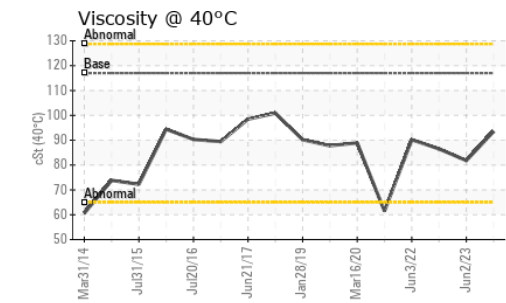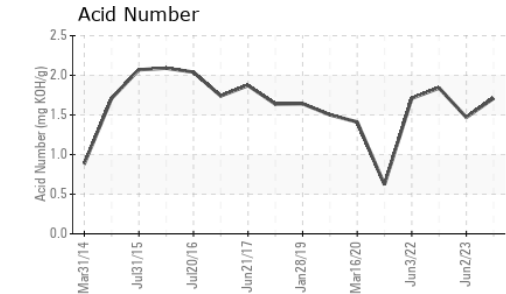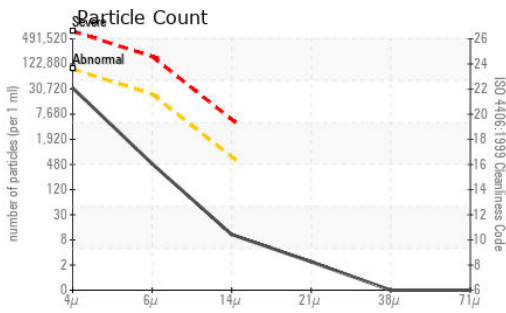

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0211945 **Received** : 14 May 2024
Lab Number : 06178621 **Tested** : 15 May 2024
Unique Number : 11029947 **Diagnosed** : 16 May 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292