



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[SPM702779 GA PACIFIC]
 Machine Id
VOLVO L150H 7091
 Component
Hydraulic System
 Fluid
VOLVO SUPER HYDRAULIC OIL 46 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP447716	VCP444822	VCP425440
Sample Date		Client Info		30 Apr 2024	15 Mar 2024	10 Nov 2023
Machine Age	hrs	Client Info		6804	5645	4509
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	ABNORMAL	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	2	4	2
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	0	<1	0
Lead	ppm	ASTM D5185m	>20	<1	1	0
Copper	ppm	ASTM D5185m	>20	<1	2	2
Tin	ppm	ASTM D5185m	>20	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	2	3	1
Potassium	ppm	ASTM D5185m	>20	0	1	0
Water		WC Method	>0.2	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	4786	▲ 10815	● 9182
Particles >6µm		ASTM D7647	>1300	744	● 2459	● 1978
Particles >14µm		ASTM D7647	>160	35	101	109
Particles >21µm		ASTM D7647	>40	7	17	24
Particles >38µm		ASTM D7647	>10	1	0	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/17/12	▲ 21/18/14	● 20/18/14
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	3	3
Boron	ppm	ASTM D5185m	14	0	0	0
Barium	ppm	ASTM D5185m	0.0	1	0	0
Molybdenum	ppm	ASTM D5185m	0.0	0	0	0
Manganese	ppm	ASTM D5185m	0.0	0	<1	0
Magnesium	ppm	ASTM D5185m	2.6	2	1	0
Calcium	ppm	ASTM D5185m	49	83	65	53
Phosphorus	ppm	ASTM D5185m	354	344	330	274
Zinc	ppm	ASTM D5185m	419	424	421	342
Sulfur	ppm	ASTM D5185m	3719	1482	1491	1127
Acid Number (AN)	mg KOH/g	ASTM D8045		0.33	0.37	0.32
Visc @ 40°C	cSt	ASTM D445	46	41.1	41.6	41.3

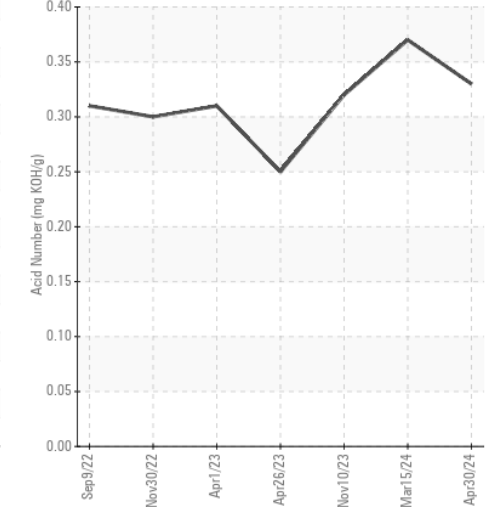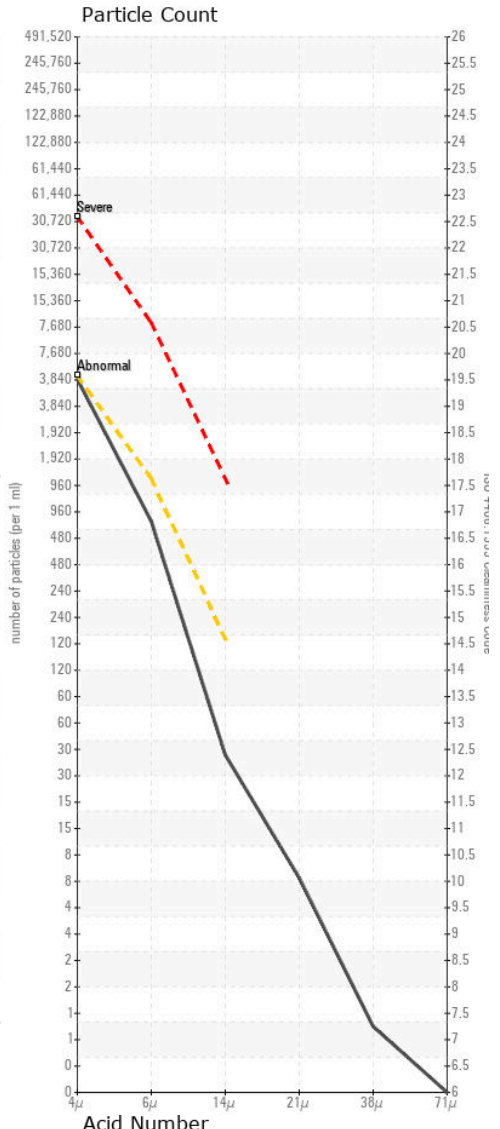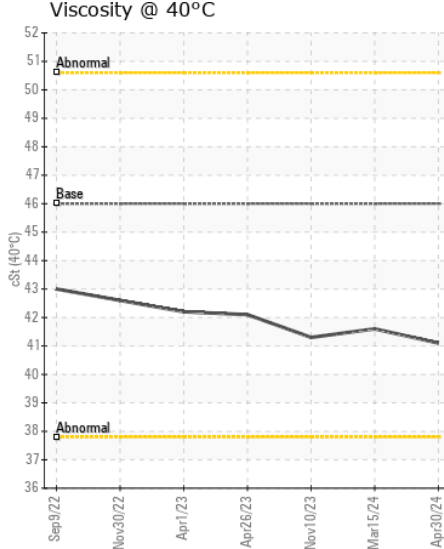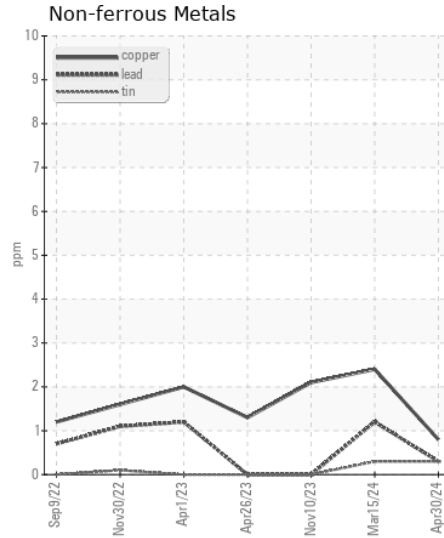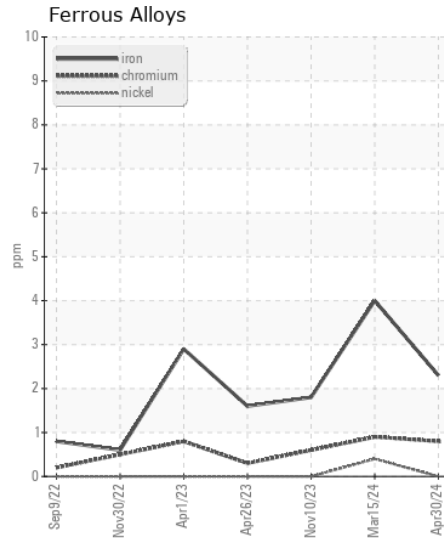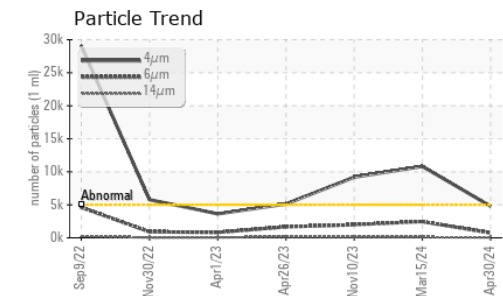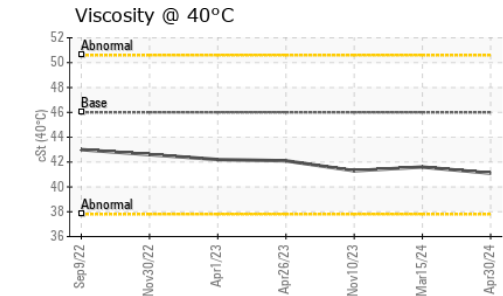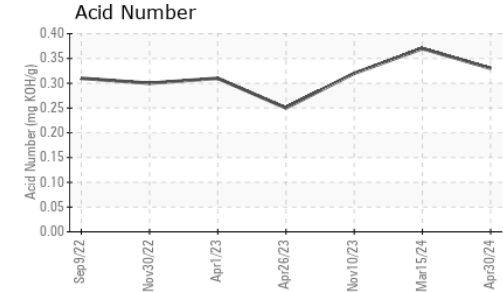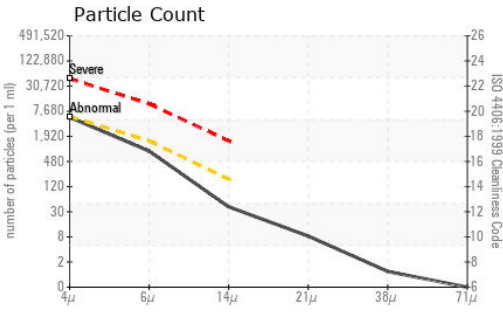

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP447716
Lab Number : 06178647
Unique Number : 11029973
Test Package : MOB 2
Received : 14 May 2024
Tested : 15 May 2024
Diagnosed : 15 May 2024 - Wes Davis

ALTA EQUIPMENT CO - ORLAND PARK
 5000 INDUSTRIAL HWY
 GARY, IN
 US 46406
 Contact: DAVE ENG
 DAVE.ENG@ALTG.COM
 T: (312)350-2560
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)