



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**CARDINAL PRIDE**  
Machine Id  
**CPR**  
Component  
**Starboard Main Engine**  
Fluid  
**CHEVRON DELO 710 LS (75 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0065099</b>	MW0065063	MW0065125
Sample Date		Client Info		<b>14 May 2024</b>	04 Apr 2024	19 Feb 2024
Machine Age	hrs	Client Info		<b>25237</b>	24460	23660
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	<b>21</b>	26	36
Chromium	ppm	ASTM D5185m	>8	<b>&lt;1</b>	<1	2
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>15	<b>3</b>	1	3
Lead	ppm	ASTM D5185m	>18	<b>11</b>	9	▲ 39
Copper	ppm	ASTM D5185m	>80	<b>&lt;1</b>	<1	1
Tin	ppm	ASTM D5185m	>14	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>4</b>	4	4
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	0	2
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0.2</b>	0.2	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.0</b>	10.4	11.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>16.3</b>	17.6	19.2
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	<b>2</b>	2	2
Boron	ppm	ASTM D5185m		<b>56</b>	51	45
Barium	ppm	ASTM D5185m		<b>0</b>	0	34
Molybdenum	ppm	ASTM D5185m		<b>60</b>	50	52
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	1	1
Magnesium	ppm	ASTM D5185m		<b>10</b>	10	9
Calcium	ppm	ASTM D5185m		<b>4337</b>	3853	3537
Phosphorus	ppm	ASTM D5185m		<b>9</b>	0	37
Zinc	ppm	ASTM D5185m		<b>0</b>	0	29
Sulfur	ppm	ASTM D5185m		<b>2938</b>	2637	2496
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>11.5</b>	13.9	15.9
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	<b>6.4</b>	8.2	8.0
Visc @ 100°C	cSt	ASTM D445	15.5	<b>14.4</b>	14.4	14.6

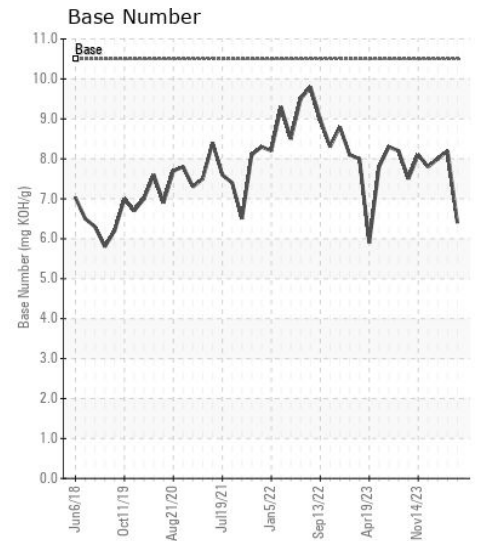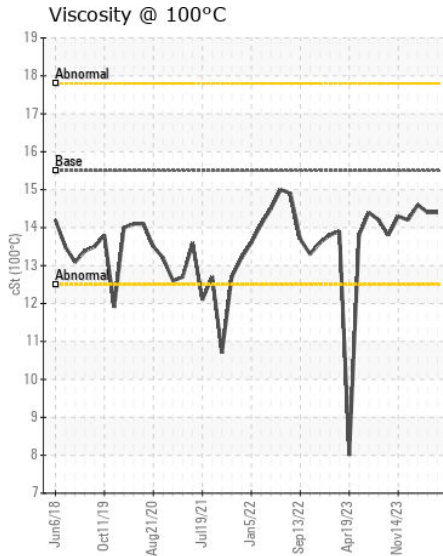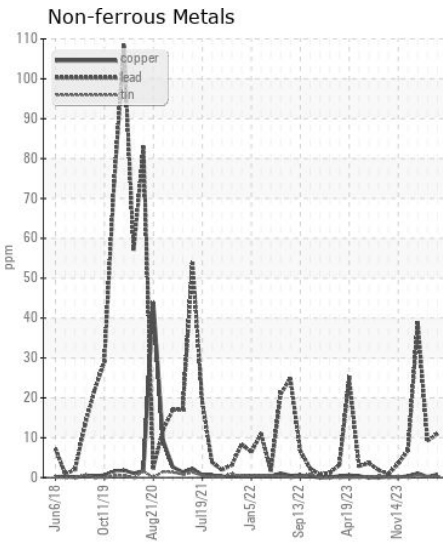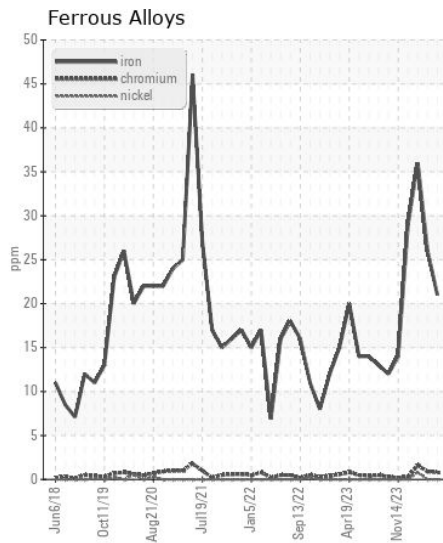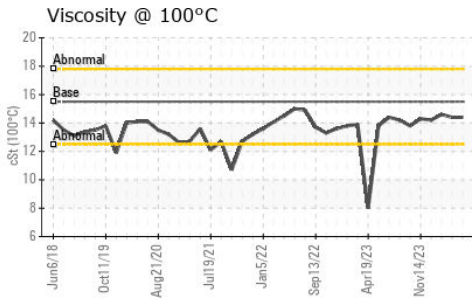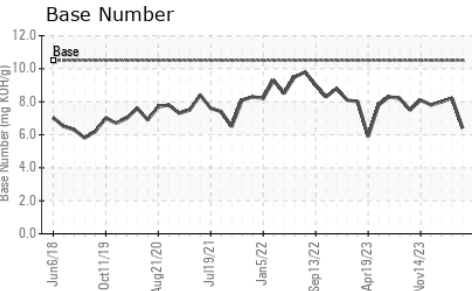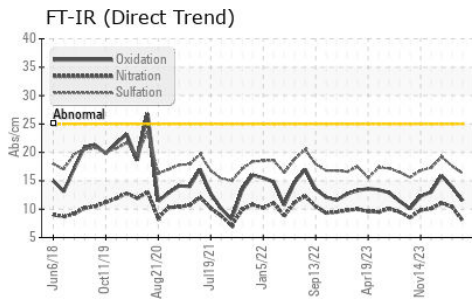

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0065099  
**Lab Number** : 06185915  
**Unique Number** : 11042667  
**Test Package** : MAR 2

**Received** : 21 May 2024  
**Tested** : 22 May 2024  
**Diagnosed** : 22 May 2024 - Wes Davis

**AMERICAN RIVER TRANSPORTATION CO.**  
 P.O. BOX 2889  
 ST. LOUIS, MO  
 US 63111

Contact: BRIAN GRIEWING  
 brian.griewing@adm.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (314)481-5278