



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 850L 1T0850LXVPF439755
 Component
Diesel Engine
 Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WE0007396	---	---
Sample Date		Client Info		16 May 2024	---	---
Machine Age	hrs	Client Info		966	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>51	58	---	---
Chromium	ppm	ASTM D5185m	>11	2	---	---
Nickel	ppm	ASTM D5185m	>5	3	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	<1	---	---
Aluminum	ppm	ASTM D5185m	>31	8	---	---
Lead	ppm	ASTM D5185m	>26	2	---	---
Copper	ppm	ASTM D5185m	>26	37	---	---
Tin	ppm	ASTM D5185m	>4	2	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	12	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Fuel		WC Method	>2.1	<1.0	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.3	---	---
Nitration	Abs/cm	*ASTM D7624	>20	6.0	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.9	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	3	---	---
Boron	ppm	ASTM D5185m		224	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		278	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m		901	---	---
Calcium	ppm	ASTM D5185m		1490	---	---
Phosphorus	ppm	ASTM D5185m		1004	---	---
Zinc	ppm	ASTM D5185m		1158	---	---
Sulfur	ppm	ASTM D5185m		3489	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	12.6	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	7.3	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	13.3	---	---

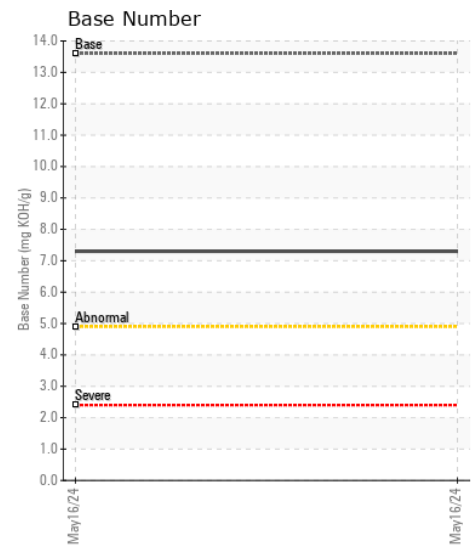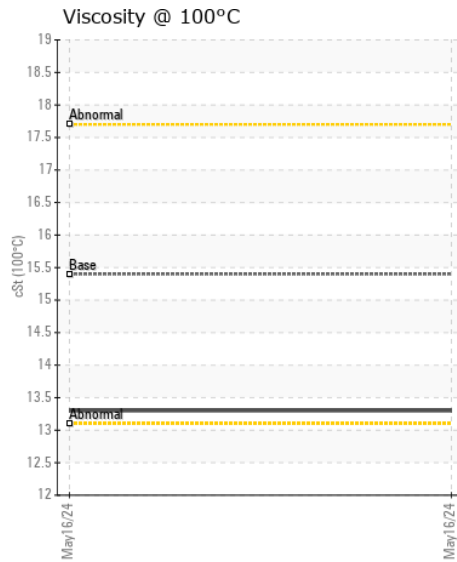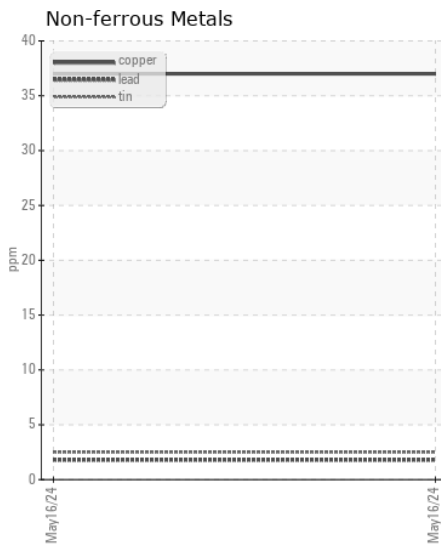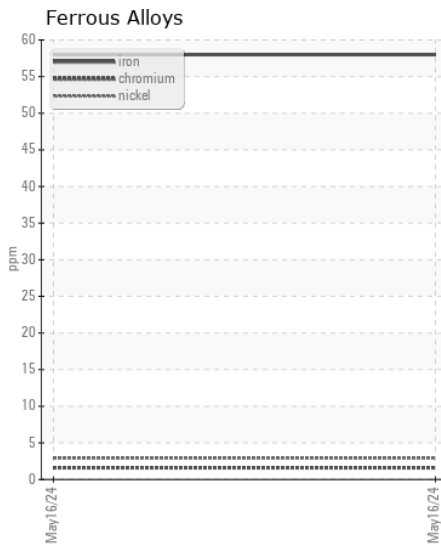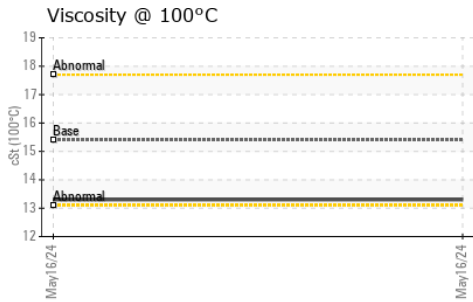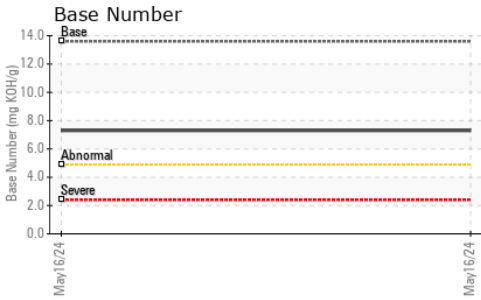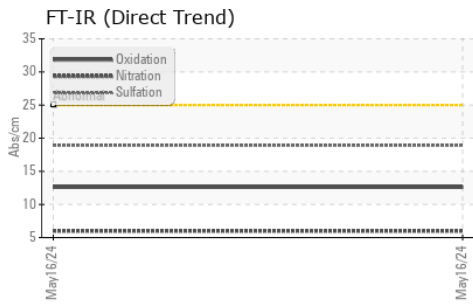

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WE0007396 **Received** : 21 May 2024
Lab Number : 06185965 **Tested** : 22 May 2024
Unique Number : 11042717 **Diagnosed** : 22 May 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

WARRIOR TRACTOR AND EQUIPMENT - MONROEVILLE
 66 INDUSTRIAL PARK DR
 MONROEVILLE, AL
 US 36460

Contact: SCOTT WILLIAMSON
 swilliamson@warriortractor.com

T: (251)575-7111

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: