



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A35G 340244
Component
Hydraulic System
Fluid
CHEVRON HYDRAULIC OIL AW ISO 46 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ML0001545	VCP408851	VCP245638
Sample Date		Client Info		16 May 2024	14 Jun 2023	10 Dec 2019
Machine Age	hrs	Client Info		9405	8088	3979
Oil Age	hrs	Client Info		1317	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	8	8	11
Chromium	ppm	ASTM D5185m	>20	0	0	<1
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	<1	1
Lead	ppm	ASTM D5185m	>20	1	1	2
Copper	ppm	ASTM D5185m	>150	4	6	8
Tin	ppm	ASTM D5185m	>20	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	6	4	6
Potassium	ppm	ASTM D5185m	>20	0	1	0
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647		1148	334	579
Particles >6µm		ASTM D7647	>5000	40	115	114
Particles >14µm		ASTM D7647	>160	3	14	11
Particles >21µm		ASTM D7647	>40	2	4	7
Particles >38µm		ASTM D7647	>10	0	0	2
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>-/19/14	17/12/9	16/14/11	16/14/11
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	0	2
Boron	ppm	ASTM D5185m		3	3	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		3	2	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		12	13	2
Calcium	ppm	ASTM D5185m		112	94	62
Phosphorus	ppm	ASTM D5185m		378	341	343
Zinc	ppm	ASTM D5185m		450	446	441
Sulfur	ppm	ASTM D5185m		1813	2064	1411
Acid Number (AN)	mg KOH/g	ASTM D8045		0.40	0.41	0.326
Visc @ 40°C	cSt	ASTM D445	43.7	44.7	44.1	40.3

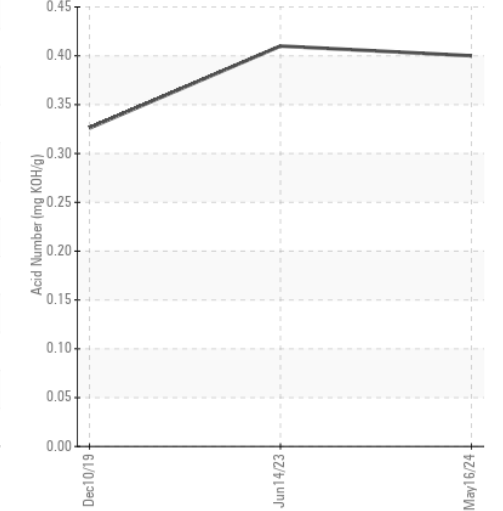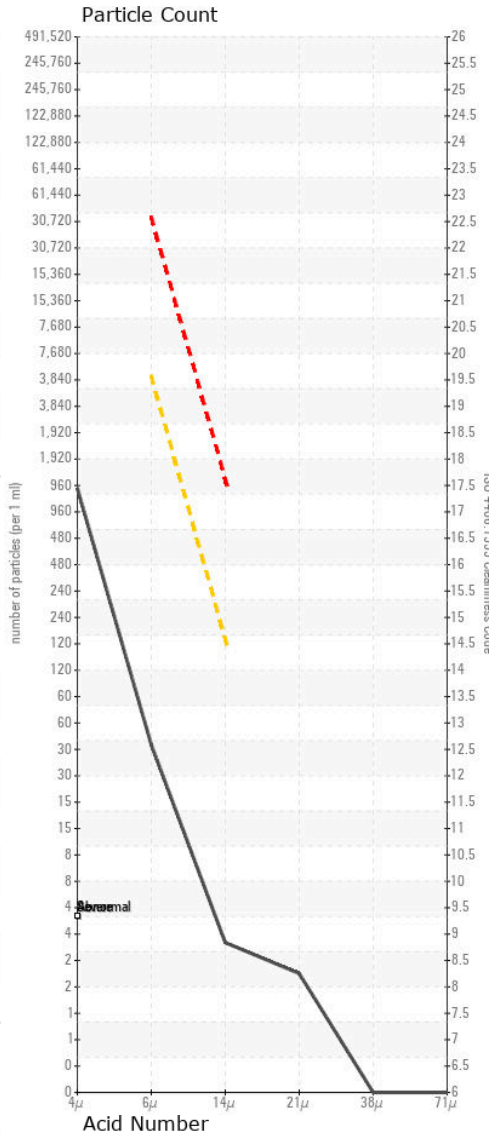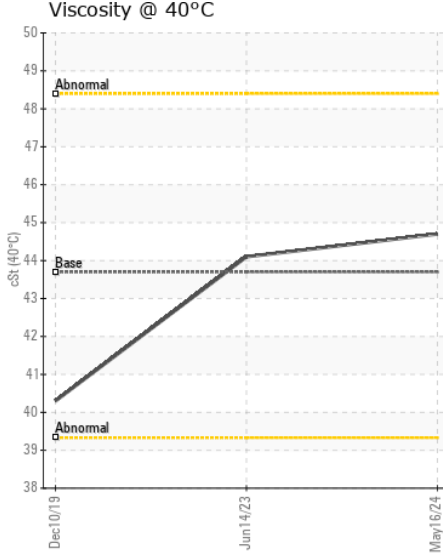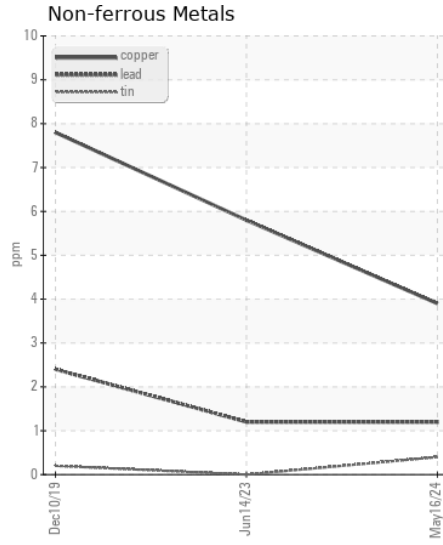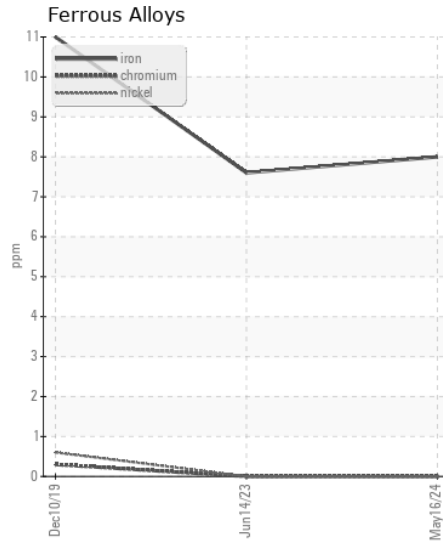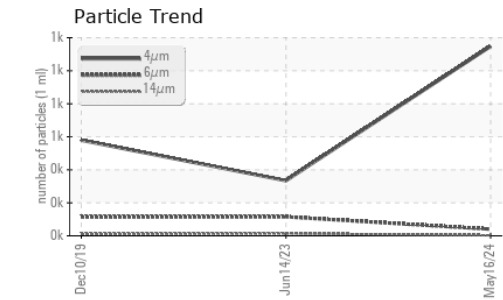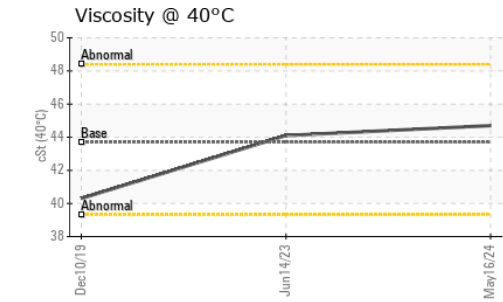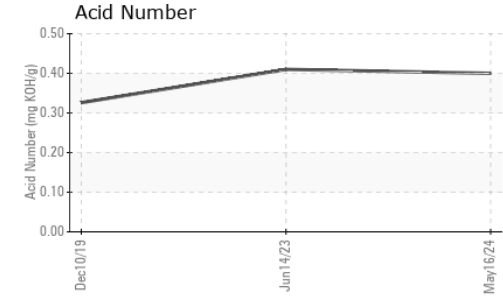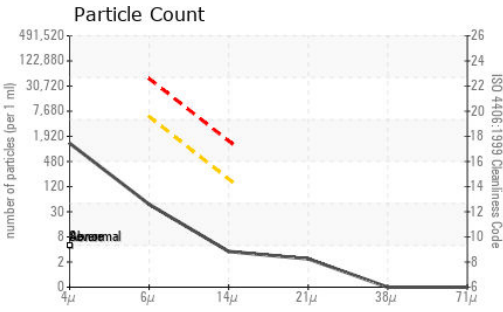

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0001545
Lab Number : 06186069
Unique Number : 11042821
Test Package : CONST

Received : 21 May 2024
Tested : 22 May 2024
Diagnosed : 23 May 2024 - Don Baldrige

MCCLEUNG-LOGAN EQUIPMENT CO - RICHMOND
 1345 MOUNTAIN ROAD
 GLEN ALLEN, VA
 US 23060
 Contact: KYLE RATLIFFE
 KRATLIFFE@MCCLEUNG-LOGAN.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (804)266-1611