



# ASCENDUM

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**Ascendum Machinery/500 Hour CSA**  
Machine Id  
**VOLVO L150H 2197 (S/N L150HV6957)**  
Component  
**Rear Axle**  
Fluid  
**VOLVO WB 102 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>ASC0011446</b>	ASC0008711	ASC0002609
Sample Date		Client Info		<b>15 May 2024</b>	27 Mar 2024	25 Jan 2024
Machine Age	hrs	Client Info		<b>8433</b>	8219	7473
Oil Age	hrs	Client Info		<b>500</b>	5282	3473
Filter Age	hrs	Client Info		<b>500</b>	0	3473
Oil Changed		Client Info		<b>Not Chngd</b>	N/A	Not Chngd
Filter Changed		Client Info		<b>Not Chngd</b>	N/A	Not Chngd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>8</b>	55	22
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>&lt;1</b>	<1	2
Lead	ppm	ASTM D5185m	>50	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>120	<b>0</b>	4	<1
Tin	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>9</b>	10	21
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	2
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	MODER	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	4	0
Boron	ppm	ASTM D5185m		<b>129</b>	116	137
Barium	ppm	ASTM D5185m		<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m		<b>0</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>0</b>	2	<1
Magnesium	ppm	ASTM D5185m		<b>15</b>	17	18
Calcium	ppm	ASTM D5185m		<b>3915</b>	3446	3850
Phosphorus	ppm	ASTM D5185m		<b>1288</b>	1354	1259
Zinc	ppm	ASTM D5185m		<b>1520</b>	1523	1600
Sulfur	ppm	ASTM D5185m		<b>4505</b>	4686	5935
Visc @ 40°C	cSt	ASTM D445	55	<b>42.2</b>	41.8	43.1

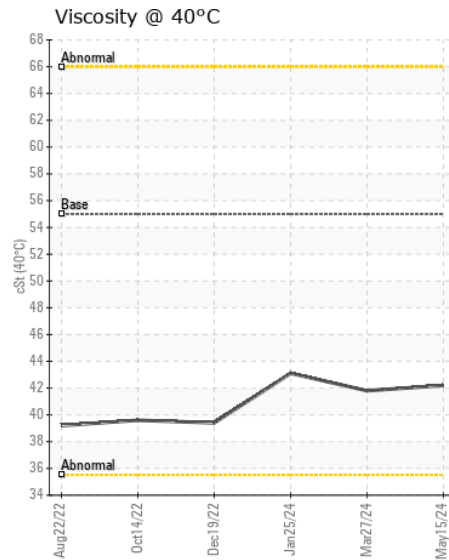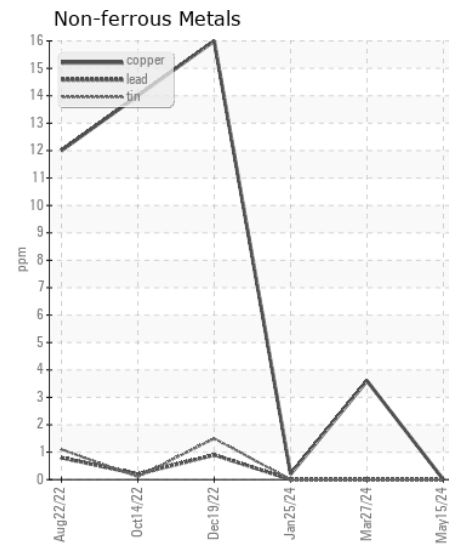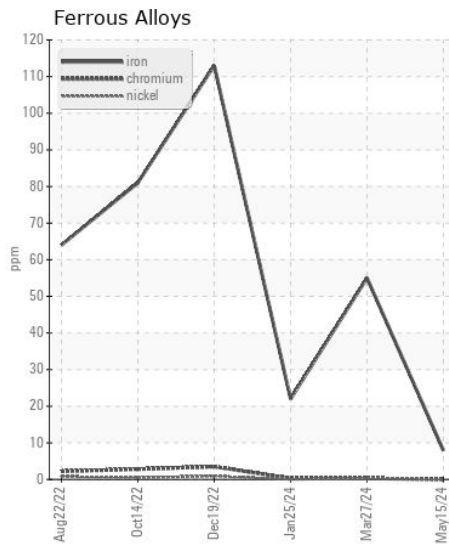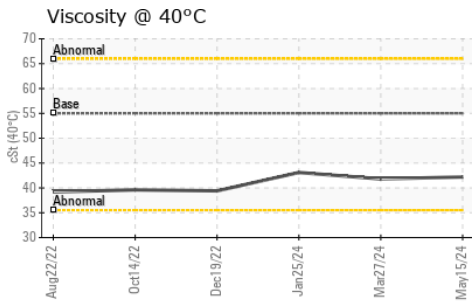

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ASC0011446  
**Lab Number** : **06186574**  
**Unique Number** : 11043326  
**Test Package** : CONST  
**Received** : 21 May 2024  
**Tested** : 22 May 2024  
**Diagnosed** : 22 May 2024 - Wes Davis

**G S MATERIALS INC**  
 PO BOX 1335  
 BURLINGTON, NC  
 US 27216

Contact: KAREN NEWPORT  
 Gsmaterials@windstream.net  
 T: (919)499-9322  
 F: (919)499-2097

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)