



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
TMR-Tampa Port
Machine Id
579182 VOLVO L110F 61672
Component
Transmission (Auto)
Fluid
VOLVO AUTOMATIC TRANSMISSION FLUID AT102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DJJ0016995	DJJ0005165	DJJ0017028
Sample Date		Client Info		13 May 2024	04 Dec 2023	09 Jan 2023
Machine Age	hrs	Client Info		12212	7850	5036
Oil Age	hrs	Client Info		0	1000	1000
Filter Age	hrs	Client Info		0	1000	1000
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	6	16	29
Chromium	ppm	ASTM D5185m	>5	0	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>5	0	0	<1
Aluminum	ppm	ASTM D5185m	>50	1	2	3
Lead	ppm	ASTM D5185m	>50	<1	0	0
Copper	ppm	ASTM D5185m	>225	<1	3	3
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	3	5	6
Potassium	ppm	ASTM D5185m	>20	<1	3	6
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	<1	2
Boron	ppm	ASTM D5185m	187	87	78	73
Barium	ppm	ASTM D5185m	0.0	0	0	3
Molybdenum	ppm	ASTM D5185m	0.0	<1	<1	<1
Manganese	ppm	ASTM D5185m	0.0	<1	<1	1
Magnesium	ppm	ASTM D5185m	6.8	1	2	4
Calcium	ppm	ASTM D5185m	215	69	72	84
Phosphorus	ppm	ASTM D5185m	445	212	163	211
Zinc	ppm	ASTM D5185m	56	22	0	27
Sulfur	ppm	ASTM D5185m	1336	2098	2031	1918
Visc @ 40°C	cSt	ASTM D445	35.3	35.6	26.5	28.1

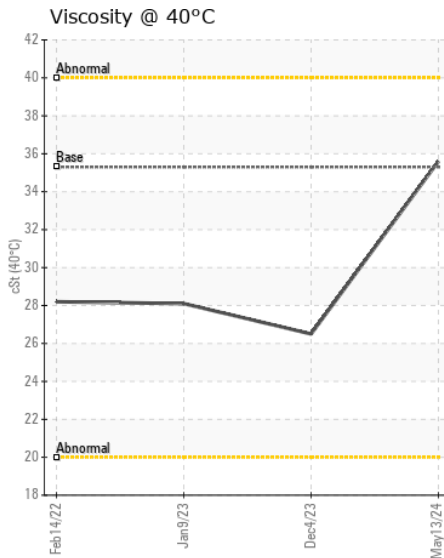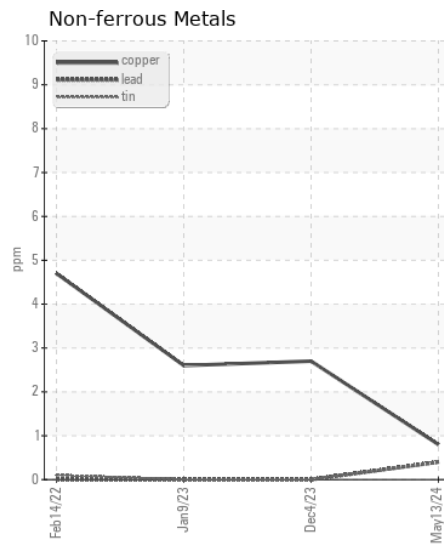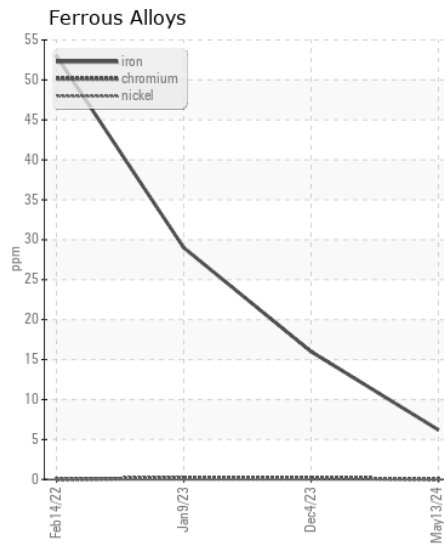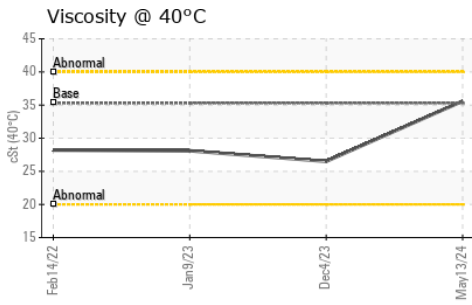

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DJJ0016995
Lab Number : 06186600
Unique Number : 11043352
Test Package : CONST

Received : 21 May 2024
Tested : 22 May 2024
Diagnosed : 23 May 2024 - Jonathan Hester

TRADEMARK METALS RECYCLING - SUTTON
 5220 DOVER STREET
 TAMPA, FL
 US 33619
 Contact: RYAN BOWDEN

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (813)677-3007
 F: (813)677-3007