



WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Area

[SW RODGERS]

Machine Id

JOHN DEERE 350P 1FF350PALNF000120

Component

Pump Drive

Fluid

JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- QTS)

### RECOMMENDATION

The oil change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0217798	---	---
Sample Date		Client Info		16 May 2024	---	---
Machine Age	hrs	Client Info		2297	---	---
Oil Age	hrs	Client Info		1000	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

### WEAR

All component wear rates are normal.

Test	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		16	---	---
Iron	ppm	ASTM D5185m	>151	96	---	---
Chromium	ppm	ASTM D5185m	>11	3	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>21	3	---	---
Lead	ppm	ASTM D5185m	>51	<1	---	---
Copper	ppm	ASTM D5185m	>51	2	---	---
Tin	ppm	ASTM D5185m	>4	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

### CONTAMINATION







Elemental level of silicon (Si) above normal indicating ingress of seal material.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>31	▲ 72	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m	>51	3	---	---
Boron	ppm	ASTM D5185m		65	---	---
Barium	ppm	ASTM D5185m		4	---	---
Molybdenum	ppm	ASTM D5185m		110	---	---
Manganese	ppm	ASTM D5185m		5	---	---
Magnesium	ppm	ASTM D5185m		16	---	---
Calcium	ppm	ASTM D5185m		4248	---	---
Phosphorus	ppm	ASTM D5185m		1384	---	---
Zinc	ppm	ASTM D5185m		1404	---	---
Sulfur	ppm	ASTM D5185m		10688	---	---
Visc @ 40°C	cSt	ASTM D445	117	58.9	---	---

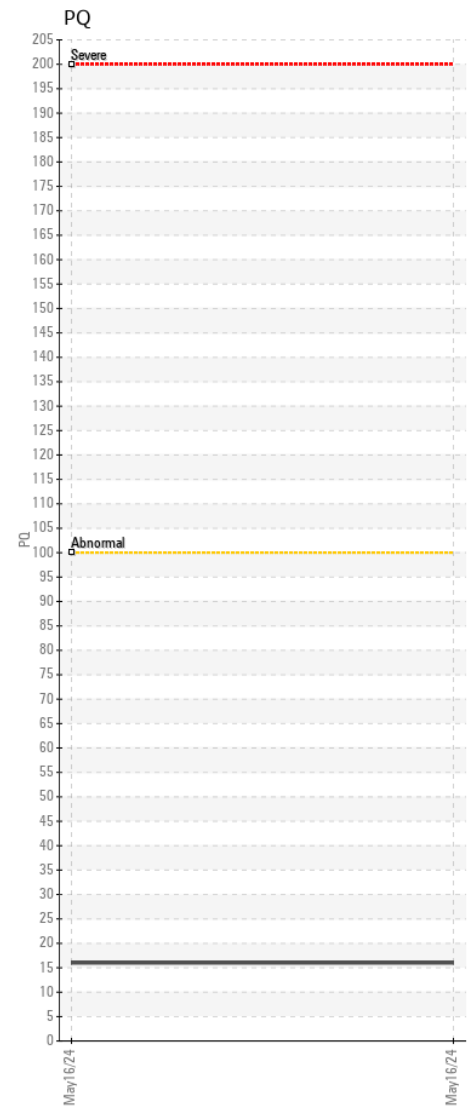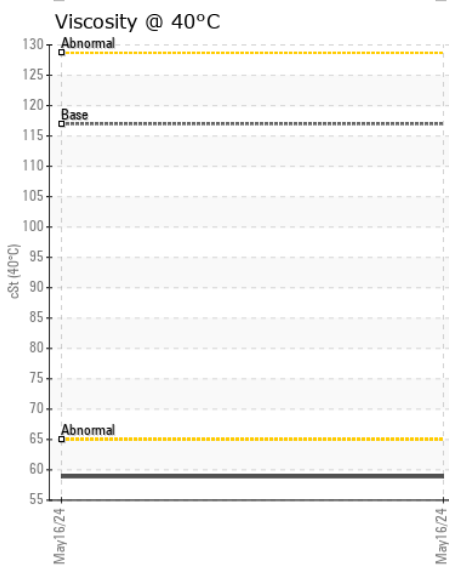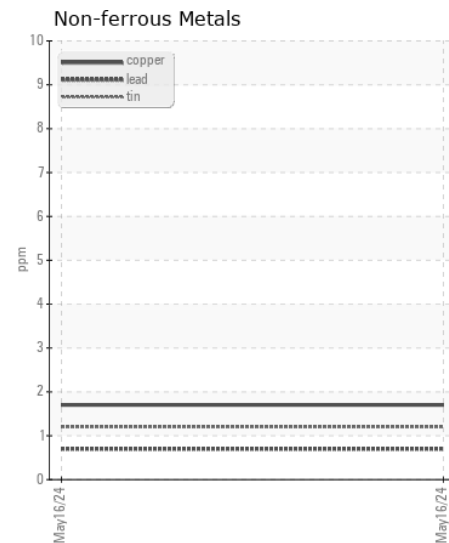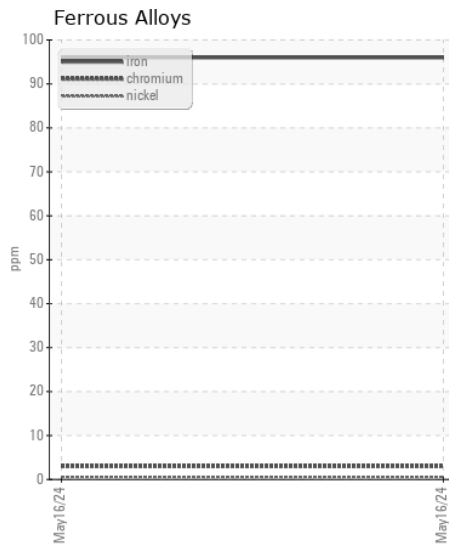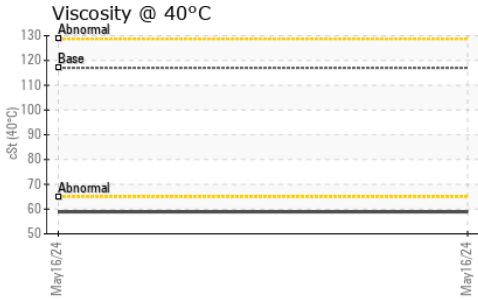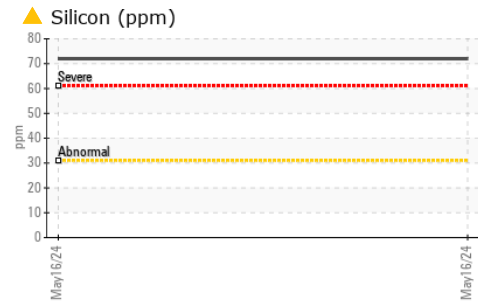

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0217798 **Received** : 21 May 2024  
**Lab Number** : 06186916 **Tested** : 23 May 2024  
**Unique Number** : 11043668 **Diagnosed** : 23 May 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - MANASSAS PARK**  
 9107 OWENS DRIVE  
 MANASSAS PARK, VA  
 US 20111

Contact: DON VEST  
 dvest@jamesriverequipment.com  
 T: (703)631-8500  
 F: (703)631-4715

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)