



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO L60H 623204
Component
Front Axle
Fluid
VOLVO WB 102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.





CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0003169	ASC0003245	---
Sample Date		Client Info		17 May 2024	28 Sep 2023	---
Machine Age	hrs	Client Info		2004	994	---
Oil Age	hrs	Client Info		2004	500	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---
Iron	ppm	ASTM D5185m	>500	100	92	---
Chromium	ppm	ASTM D5185m	>20	5	4	---
Nickel	ppm	ASTM D5185m	>10	<1	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m	>30	2	3	---
Lead	ppm	ASTM D5185m	>50	1	0	---
Copper	ppm	ASTM D5185m	>120	3	1	---
Tin	ppm	ASTM D5185m	>20	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185m	>50	19	16	---
Potassium	ppm	ASTM D5185m	>20	4	0	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---
Sodium	ppm	ASTM D5185m		6	8	---
Boron	ppm	ASTM D5185m		154	148	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		5	5	---
Manganese	ppm	ASTM D5185m		10	8	---
Magnesium	ppm	ASTM D5185m		13	14	---
Calcium	ppm	ASTM D5185m		4091	3845	---
Phosphorus	ppm	ASTM D5185m		1414	1318	---
Zinc	ppm	ASTM D5185m		1663	1654	---
Sulfur	ppm	ASTM D5185m		4560	4051	---
Visc @ 40°C	cSt	ASTM D445	55	41.0	41.2	---

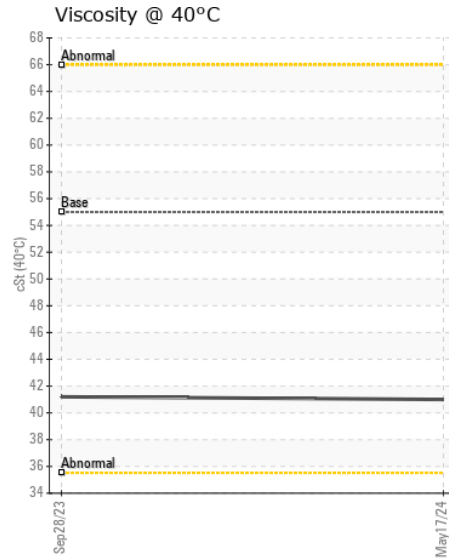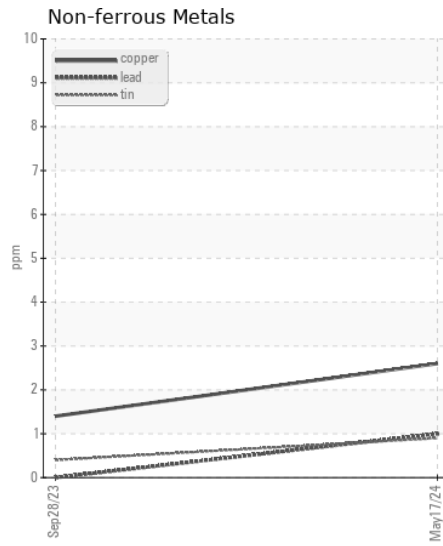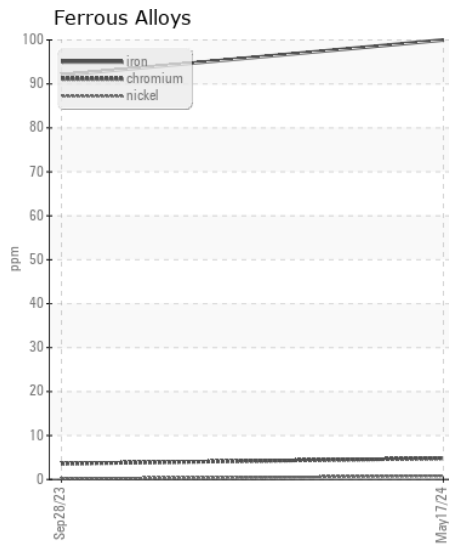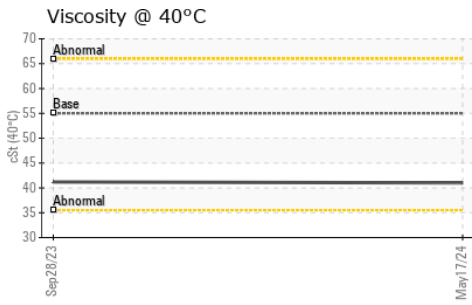

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0003169
Lab Number : 06186970
Unique Number : 11043722
Test Package : CONST

Received : 21 May 2024
Tested : 23 May 2024
Diagnosed : 23 May 2024 - Wes Davis

160 - ASCENDUM MACHINERY INC - MILLS RIVER
 215 FANNING FIELDS RD
 MILLS RIVER, NC
 US 28759
 Contact: BRANDON DRAKE
 brandon.drake@ascendummachinery.com
 T: 8(286)687-0620
 F: (828)687-0622

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)