



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Machine Id
5400044
 Component
Diesel Engine
 Fluid
SHELL ROTELLA T 15W40 (--- QTS)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.









CONTAMINATION

Fuel content negligible. There is no indication of any contamination in the oil.

FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0919180	WC0602102	---
Sample Date		Client Info		16 May 2024	22 Nov 2021	---
Machine Age	hrs	Client Info		0	3379	---
Oil Age	hrs	Client Info		0	250	---
Filter Age	hrs	Client Info		0	250	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				ATTENTION	NORMAL	---
<hr/>						
Iron	ppm	ASTM D5185m	>100	64	9	---
Chromium	ppm	ASTM D5185m	>20	1	<1	---
Nickel	ppm	ASTM D5185m	>4	0	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	3	2	---
Lead	ppm	ASTM D5185m	>40	1	3	---
Copper	ppm	ASTM D5185m	>330	2	<1	---
Tin	ppm	ASTM D5185m	>15	<1	1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
<hr/>						
Silicon	ppm	ASTM D5185m	>25	9	6	---
Potassium	ppm	ASTM D5185m	>20	<1	7	---
Fuel	%	ASTM D3524	>5	0.2	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.4	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	6.2	6.8	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	15.9	21.8	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---
<hr/>						
Sodium	ppm	ASTM D5185m		<1	3	---
Boron	ppm	ASTM D5185m	316	12	198	---
Barium	ppm	ASTM D5185m	0.0	0	0	---
Molybdenum	ppm	ASTM D5185m	1.2	8	33	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	24	84	189	---
Calcium	ppm	ASTM D5185m	2292	1831	2167	---
Phosphorus	ppm	ASTM D5185m	1064	830	1044	---
Zinc	ppm	ASTM D5185m	1160	916	1125	---
Sulfur	ppm	ASTM D5185m	4996	3413	3170	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	9.1	16.7	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	5.5	8.6	---
Visc @ 100°C	cSt	ASTM D445	15.7	11.9	14.3	---

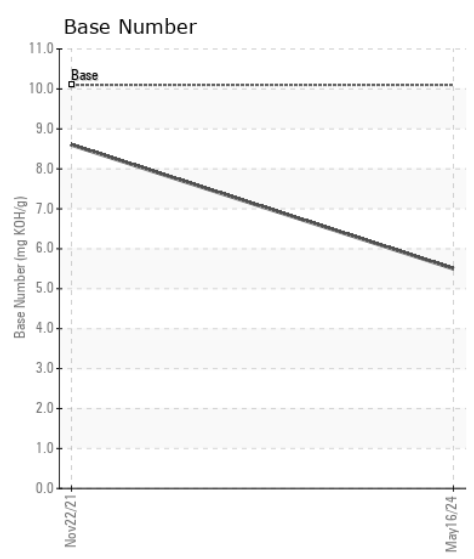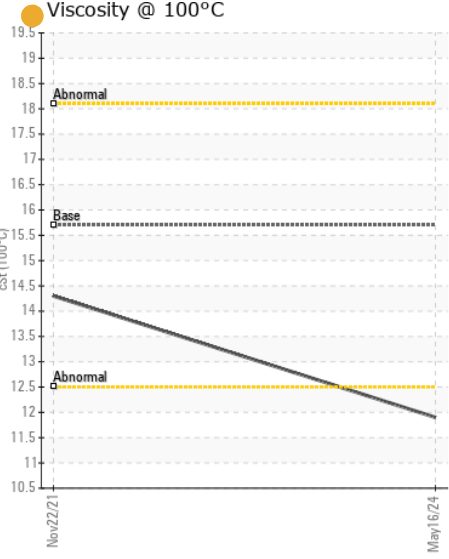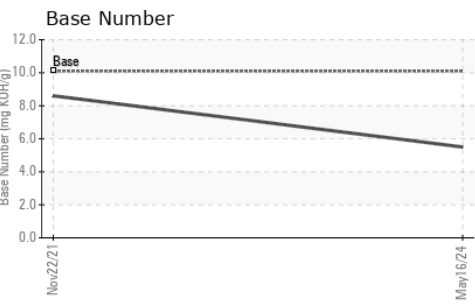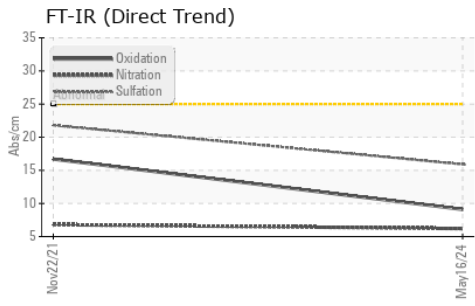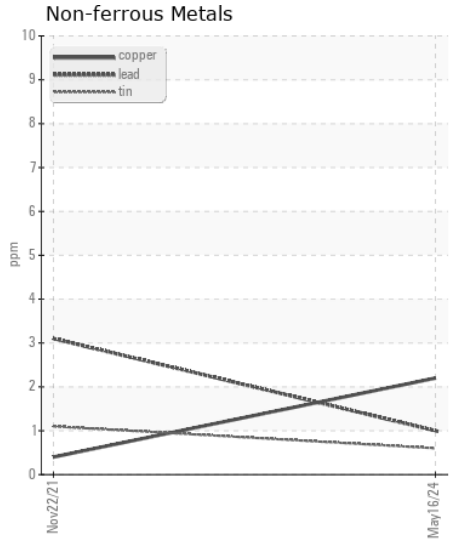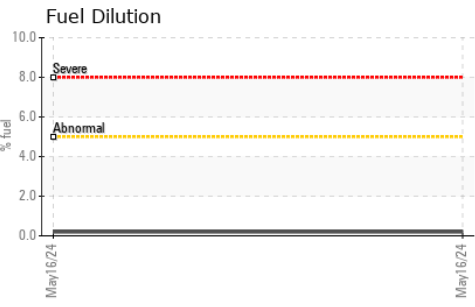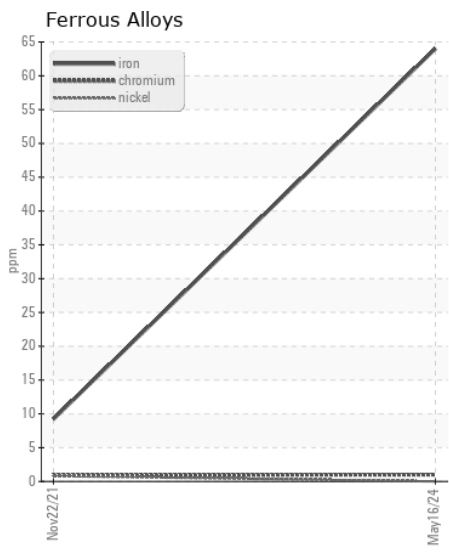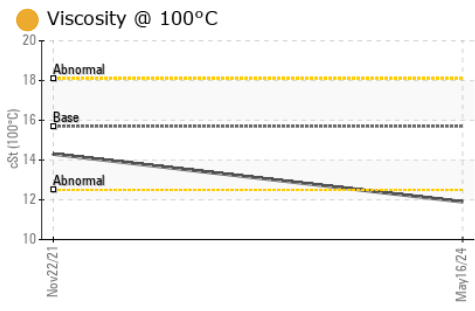

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0919180 **Received** : 21 May 2024
Lab Number : 06187043 **Tested** : 28 May 2024
Unique Number : 11043795 **Diagnosed** : 28 May 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

KELLER-NA - KERNERSVILLE
 1024 EAST MOUNTAIN ST
 KERNERSVILLE, NC
 US 27284
 Contact: KEN COOK
 KENNETH.COOK@KELLER-NA.COM
 T:
 F: (336)668-3259

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)