



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

(P656607)

Machine Id

3806C

Component

Natural Gas Engine

Fluid

PETRO CANADA DURON GEO LD 15W40 (10 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0110363	GFL0050914	GFL0050885
Sample Date		Client Info		16 May 2024	20 Oct 2023	21 Sep 2023
Machine Age	hrs	Client Info		12839	12339	12295
Oil Age	hrs	Client Info		12126	12170	12126
Filter Age	hrs	Client Info		12126	0	12126
Oil Changed		Client Info		N/A	Not Changd	N/A
Filter Changed		Client Info		Not Changd	Not Changd	N/A
Sample Status				NORMAL	NORMAL	SEVERE

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	11	9	52
Chromium	ppm	ASTM D5185m	>4	<1	<1	6
Nickel	ppm	ASTM D5185m	>2	0	<1	2
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>9	1	2	<1
Lead	ppm	ASTM D5185m	>30	2	<1	20
Copper	ppm	ASTM D5185m	>35	<1	<1	▲ 60
Tin	ppm	ASTM D5185m	>4	<1	0	1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>+100	8	6	37
Potassium	ppm	ASTM D5185m	>20	24	17	▲ 658
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		---	---	▲ 0.20
Soot %	%	*ASTM D7844		0.1	0	0.1
Nitration	Abs/cm	*ASTM D7624	>20	10.6	8.0	17.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.9	18.8	22.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		44	23	▲ 2165
Boron	ppm	ASTM D5185m	50	13	26	42
Barium	ppm	ASTM D5185m	5	0	3	0
Molybdenum	ppm	ASTM D5185m	50	60	61	190
Manganese	ppm	ASTM D5185m	0	<1	0	2
Magnesium	ppm	ASTM D5185m	560	612	588	610
Calcium	ppm	ASTM D5185m	1510	1487	1425	1792
Phosphorus	ppm	ASTM D5185m	780	806	788	865
Zinc	ppm	ASTM D5185m	870	987	977	1078
Sulfur	ppm	ASTM D5185m	2040	2812	2885	3298
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.9	15.5	18.2
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	5.0	7.5	16.0
Visc @ 100°C	cSt	ASTM D445	15.1	13.9	13.7	16.0


FT-IR (Direct Trend)

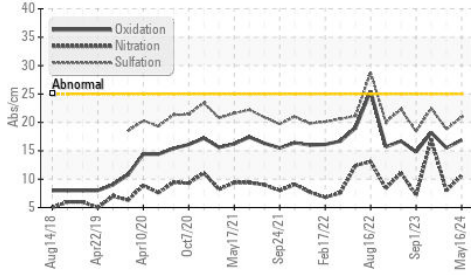


Base Number

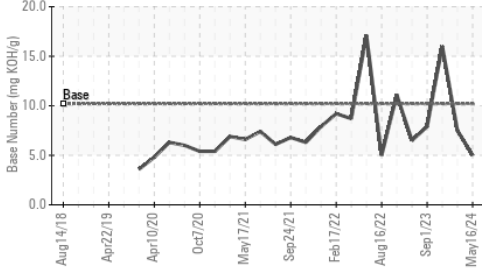


Viscosity @ 100°C

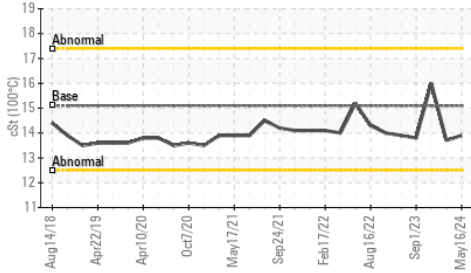


Ferrous Alloys

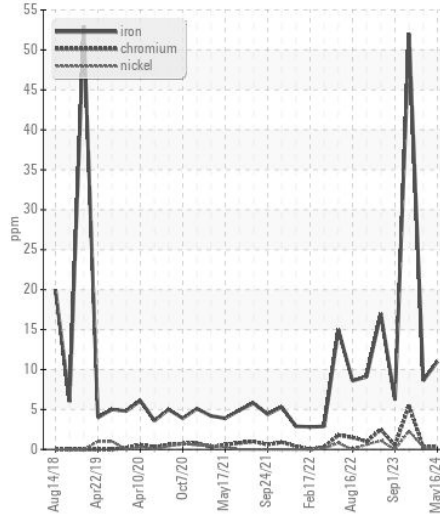


Non-ferrous Metals

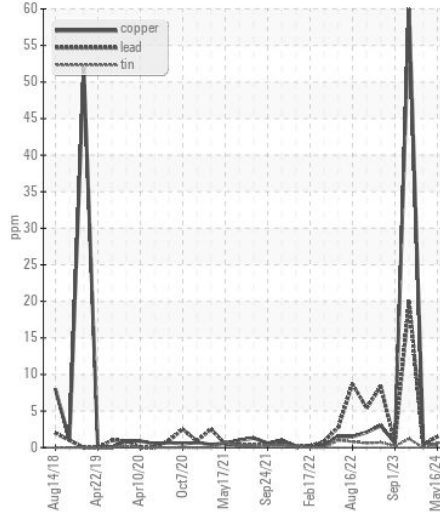

Viscosity @ 100°C

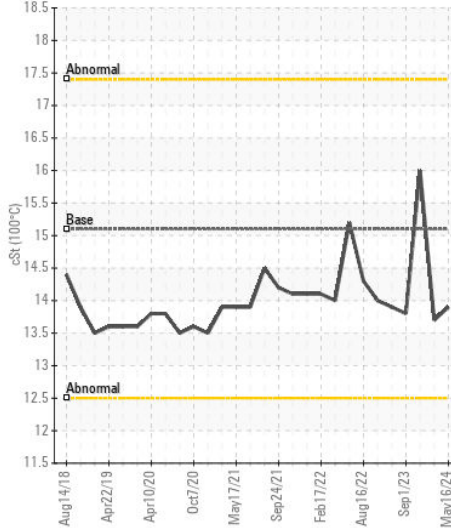

Base Number

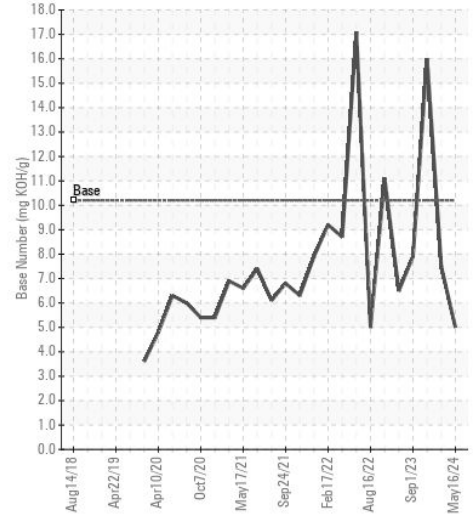

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0110363
Lab Number : 06187067
Unique Number : 11043819
Test Package : FLEET

Received : 21 May 2024
Tested : 23 May 2024
Diagnosed : 23 May 2024 - Wes Davis

GFL Environmental - 031 - Greenville/Spartanburg
 1635 Antioch Church Rd
 Piedmont, SC
 US 29673

Contact: TECHNICIAN ACCOUNT
 catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: