



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
922050
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: Services completed)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0116290	GFL0094892	---
Sample Date		Client Info		17 May 2024	21 Feb 2024	---
Machine Age	hrs	Client Info		5826	5293	---
Oil Age	hrs	Client Info		580	0	---
Filter Age	hrs	Client Info		580	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	15	2	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>5	1	0	---
Titanium	ppm	ASTM D5185m	>2	0	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>20	5	2	---
Lead	ppm	ASTM D5185m	>40	1	0	---
Copper	ppm	ASTM D5185m	>330	1	0	---
Tin	ppm	ASTM D5185m	>15	1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	5	4	---
Potassium	ppm	ASTM D5185m	>20	9	0	---
Fuel		WC Method	>3.0	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>4	0.9	0.5	---
Nitration	Abs/cm	*ASTM D7624	>20	9.6	9.2	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.6	20.6	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	0	---
Boron	ppm	ASTM D5185m	0	9	41	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	60	67	67	---
Manganese	ppm	ASTM D5185m	0	<1	<1	---
Magnesium	ppm	ASTM D5185m	1010	922	587	---
Calcium	ppm	ASTM D5185m	1070	1161	1308	---
Phosphorus	ppm	ASTM D5185m	1150	1033	715	---
Zinc	ppm	ASTM D5185m	1270	1218	866	---
Sulfur	ppm	ASTM D5185m	2060	3192	2491	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.0	18.6	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	7.1	8.0	---
Visc @ 100°C	cSt	ASTM D445	15.4	13.6	13.4	---

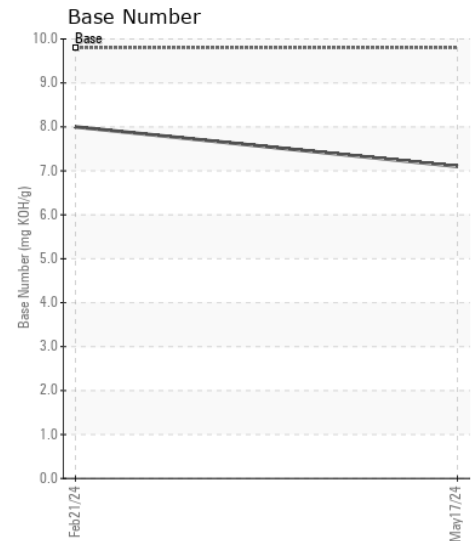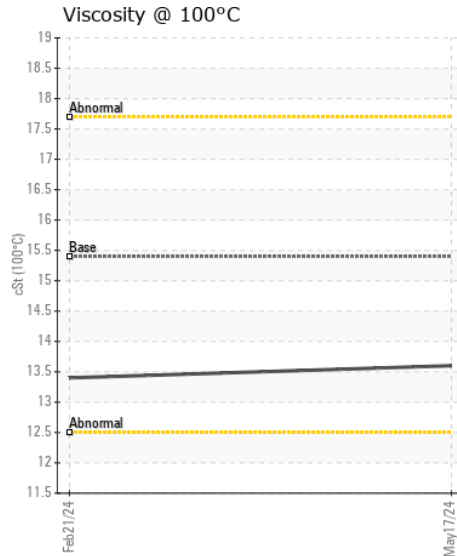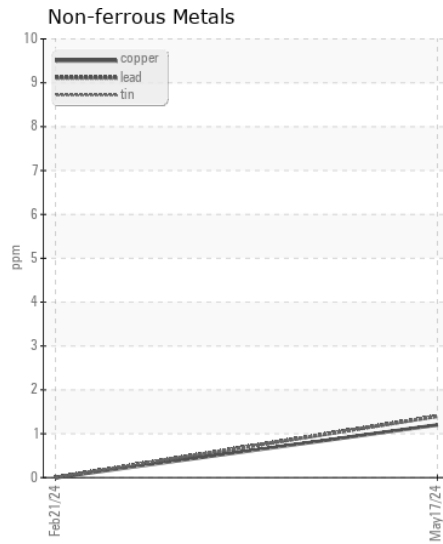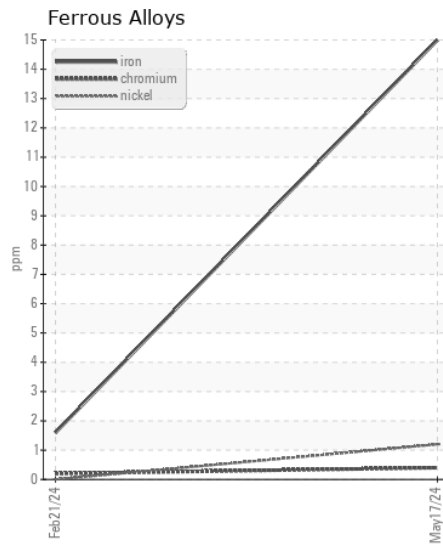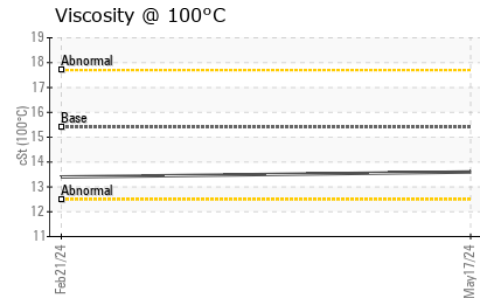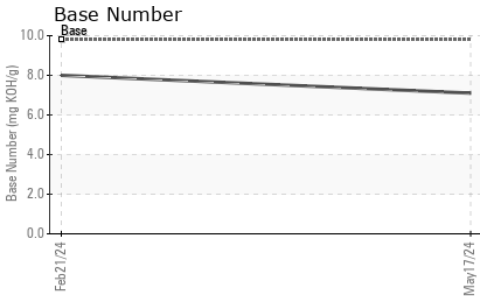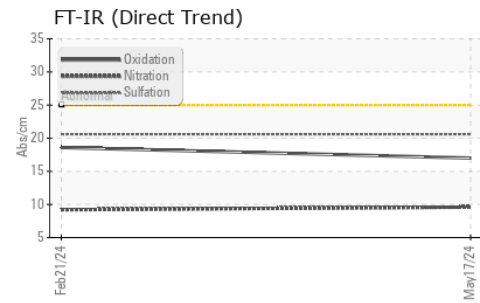

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0116290
Lab Number : 06187144
Unique Number : 11043896
Test Package : FLEET

Received : 21 May 2024
Tested : 23 May 2024
Diagnosed : 23 May 2024 - Sean Felton

GFL Environmental - 625 - Harrison Hauling
 2480 S Clare Ave
 Clare, MI
 US 48617
 Contact: Glenda Standen
 gstanden@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: