



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FORD CD28 FORD BUG
 Component
Gasoline Engine
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0034110	---	---
Sample Date		Client Info		29 Apr 2024	---	---
Machine Age	mls	Client Info		40659	---	---
Oil Age	mls	Client Info		0	---	---
Filter Age	mls	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	3	---	---
Chromium	ppm	ASTM D5185m	>20	0	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>40	4	---	---
Lead	ppm	ASTM D5185m	>50	<1	---	---
Copper	ppm	ASTM D5185m	>155	2	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	11	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Fuel	%	ASTM D3524	>4.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0	---	---
Nitration	Abs/cm	*ASTM D7624	>20	5.0	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	14.4	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>400	0	---	---
Boron	ppm	ASTM D5185m		124	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		227	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m		494	---	---
Calcium	ppm	ASTM D5185m		1284	---	---
Phosphorus	ppm	ASTM D5185m		668	---	---
Zinc	ppm	ASTM D5185m		799	---	---
Sulfur	ppm	ASTM D5185m		2395	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	8.1	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		6.3	---	---
Visc @ 100°C	cSt	ASTM D445		8.3	---	---

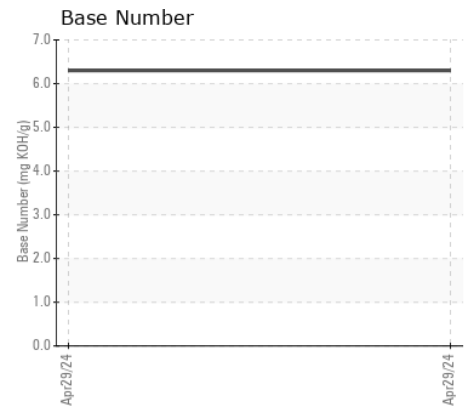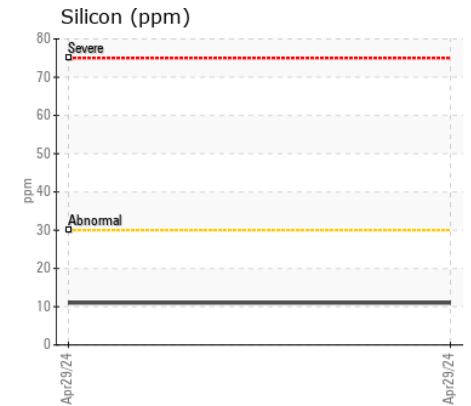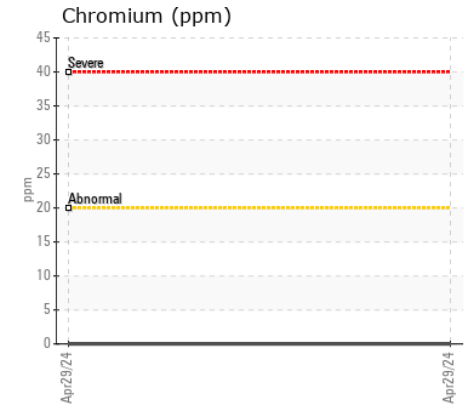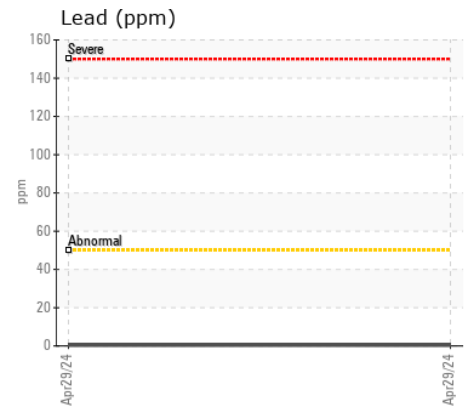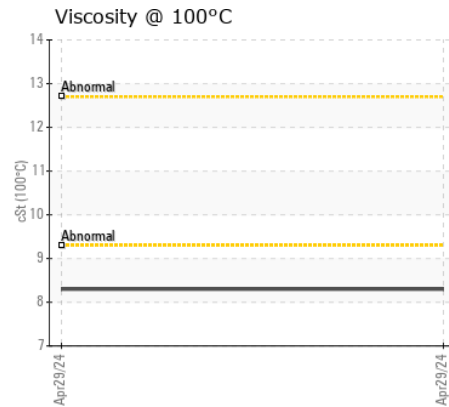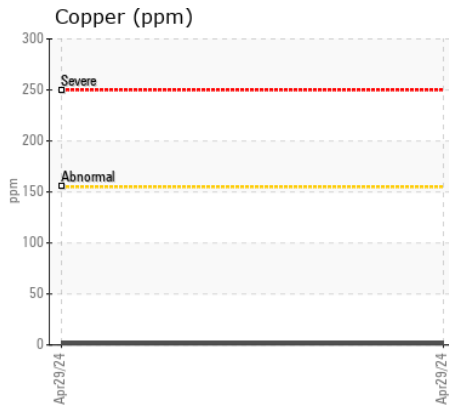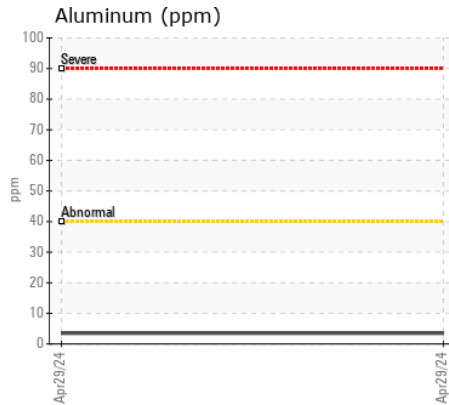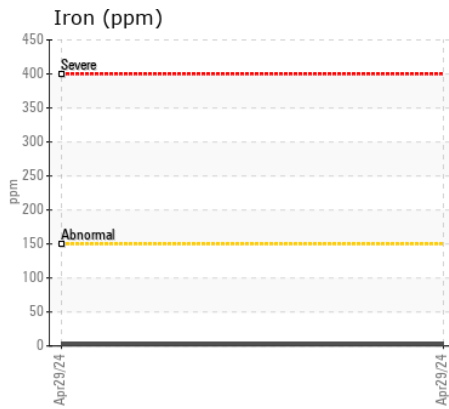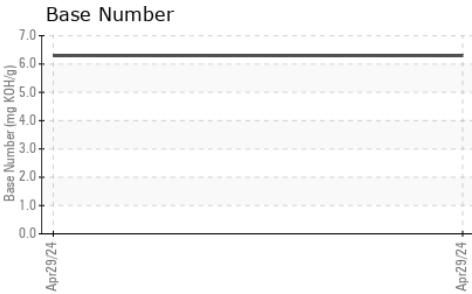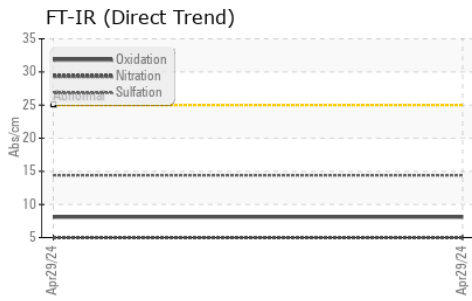

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0034110 **Received** : 21 May 2024
Lab Number : 06187156 **Tested** : 24 May 2024
Unique Number : 11043908 **Diagnosed** : 24 May 2024 - Jonathan Hester
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel, TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

M&M FLEET
 5046 BUCHANAN ST.
 HYATTSVILLE, MD
 US 20781
 Contact: June McClosky
 office@mmfleet.net
 T: (301)779-4545
 F: x: