



OIL ANALYSIS REPORT

| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
PAULSBORO BS 150
 Component
New (Unused) Oil
 Fluid
{not provided} (--- LTR)

RECOMMENDATION

This is a baseline read-out on the submitted sample.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | DC0035822 | DC0035495 | DC0035511 |
| Sample Date | | Client Info | | 16 May 2024 | 16 Apr 2024 | 25 Mar 2024 |
| Machine Age | mls | Client Info | | 0 | 0 | 0 |
| Oil Age | mls | Client Info | | 0 | 0 | 0 |
| Filter Age | mls | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | N/A | N/A | N/A |
| Filter Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR











| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Chromium | ppm | ASTM D5185m | | <1 | 0 | <1 |
| Nickel | ppm | ASTM D5185m | | <1 | 0 | <1 |
| Titanium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Silver | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | | 1 | 0 | <1 |
| Lead | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Copper | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Tin | ppm | ASTM D5185m | | 1 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION

| | | | | | | |
|------------------|--------|--------------|-----------|-----------------|----------|----------|
| Silicon | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Potassium | ppm | ASTM D5185m | >20 | 1 | <1 | <1 |
| Water | | WC Method | | NEG | NEG | NEG |
| Particles >4µm | | ASTM D7647 | >40000 | 540 | 565 | 614 |
| Particles >6µm | | ASTM D7647 | >5000 | 124 | 109 | 185 |
| Particles >14µm | | ASTM D7647 | >640 | 13 | 12 | 18 |
| Particles >21µm | | ASTM D7647 | >160 | 3 | 4 | 4 |
| Particles >38µm | | ASTM D7647 | >40 | 0 | 1 | 0 |
| Particles >71µm | | ASTM D7647 | >10 | 0 | 0 | 0 |
| Oil Cleanliness | | ISO 4406 (c) | >22/19/16 | 16/14/11 | 16/14/11 | 16/15/11 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | | NEG | NEG | NEG |

FLUID CONDITION

| | | | | | | |
|----------------------|----------|-------------|--|--------------|-------|-------|
| Sodium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Boron | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Barium | ppm | ASTM D5185m | | 0 | <1 | 0 |
| Molybdenum | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Calcium | ppm | ASTM D5185m | | 8 | 8 | 0 |
| Phosphorus | ppm | ASTM D5185m | | 0 | 3 | 0 |
| Zinc | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Sulfur | ppm | ASTM D5185m | | 14581 | 13901 | 15291 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 0.102 | 0.085 | 0.085 |
| Visc @ 40°C | cSt | ASTM D445 | | 483.4 | 487.6 | 491.1 |
| Visc @ 100°C | cSt | ASTM D445 | | 30.6 | 31.15 | 31.38 |
| Viscosity Index (VI) | Scale | ASTM D2270 | | 92 | 93 | 94 |

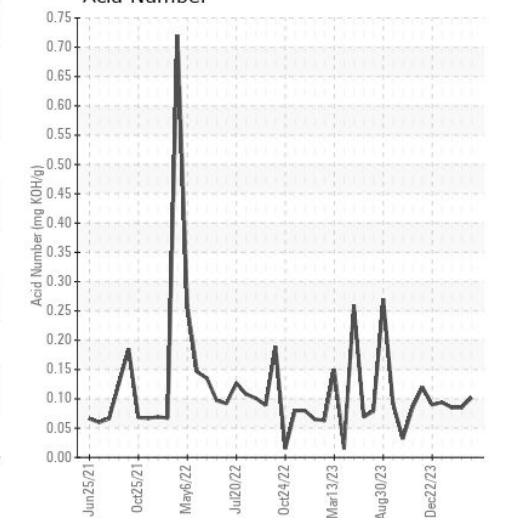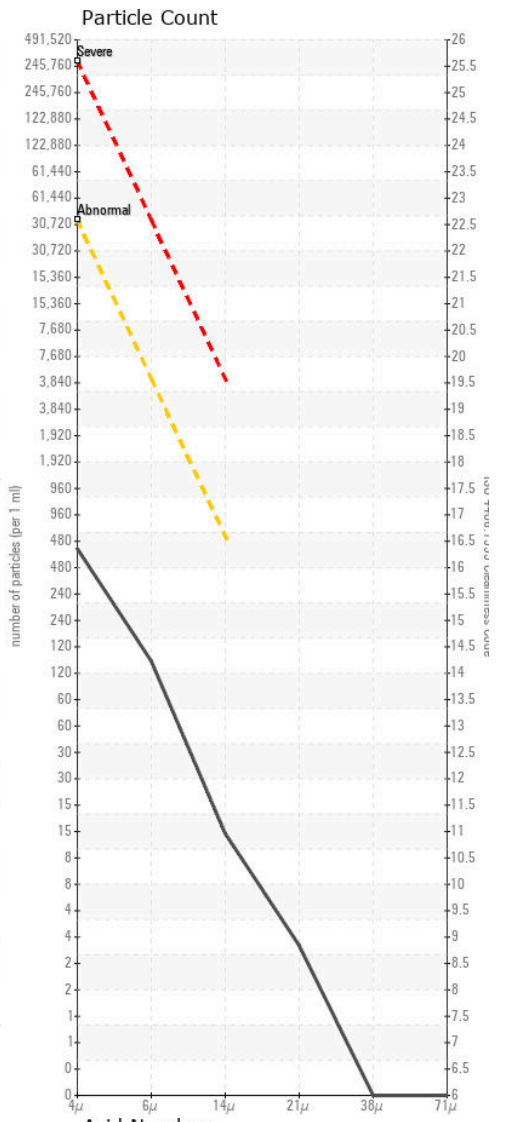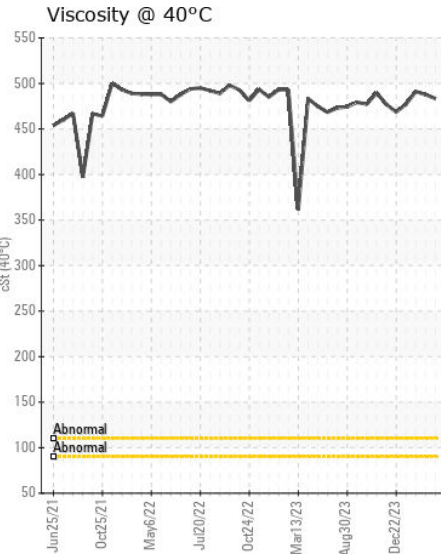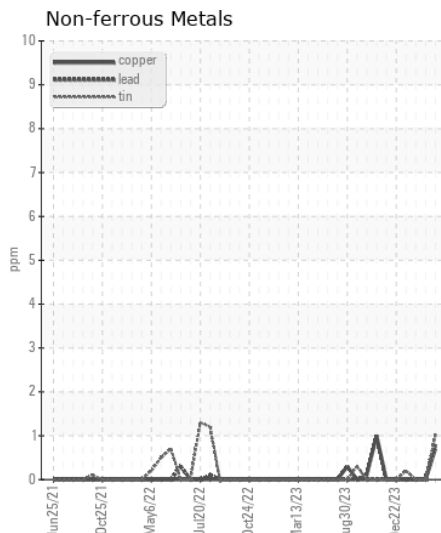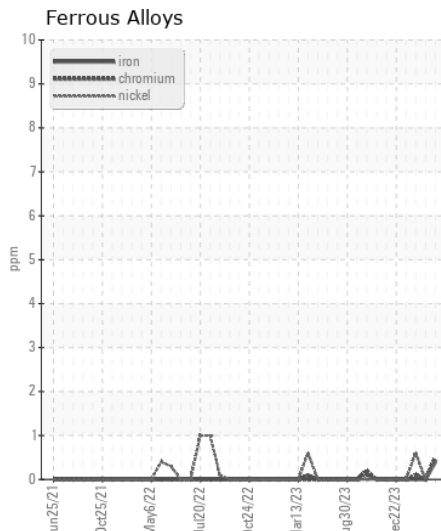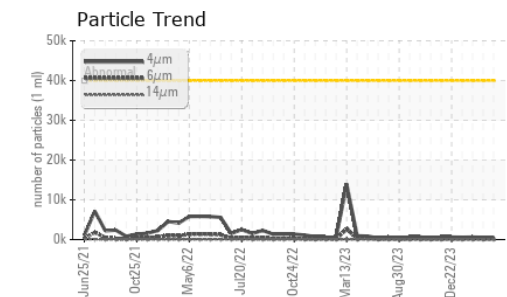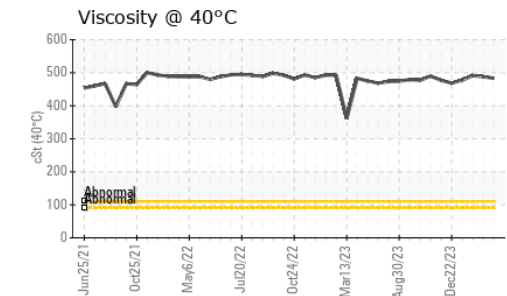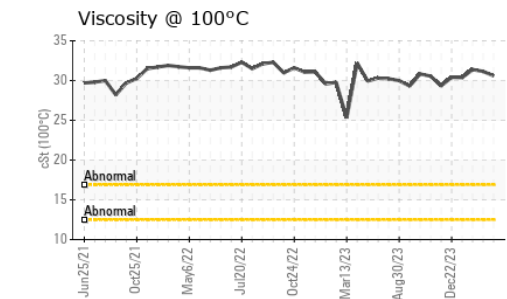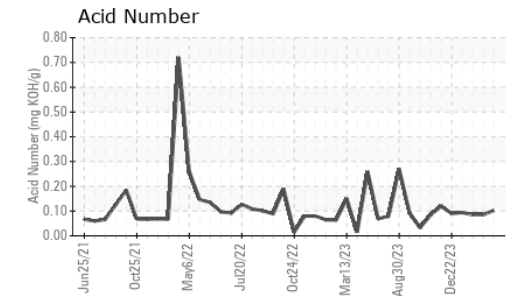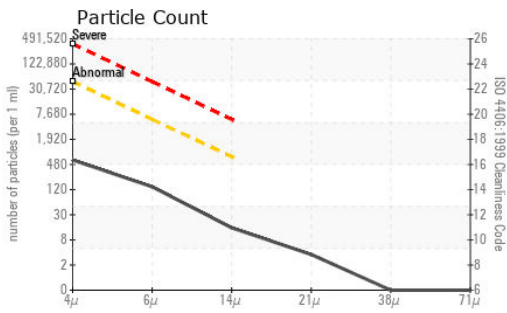

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0035822
Lab Number : 06187205
Unique Number : 11043957
Test Package : MOB 2 (Additional Tests: FT-IR, KV100, PrtCount, VI)

Received : 21 May 2024
Tested : 28 May 2024
Diagnosed : 28 May 2024 - Jonathan Hester

THE UNITED OIL COMPANY - OPERATIONS
 4405 E. BALTIMORE ST
 BALTIMORE, MD
 US 21224
 Contact: MICHELLE HORNING

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (410)327-7695