



FORENSIC  
AND  
SCIENTIFIC  
TESTING INC.

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id  
**INFINITY 35057**  
Component  
**Gasoline Engine**  
Fluid  
**{not provided} (--- QTS)**

**RECOMMENDATION**

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		FSM1378698	---	---
Sample Date		Client Info		13 May 2024	---	---
Machine Age	mls	Client Info		60000	---	---
Oil Age	mls	Client Info		0	---	---
Filter Age	mls	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	8	---	---
Chromium	ppm	ASTM D5185m	>20	0	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>40	3	---	---
Lead	ppm	ASTM D5185m	>50	2	---	---
Copper	ppm	ASTM D5185m	>155	2	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

**CONTAMINATION**













Elemental level of silicon (Si) above normal indicating ingress of seal material.

Silicon	ppm	ASTM D5185m	>30	▲ 34	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	13.2	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.4	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>400	4	---	---
Boron	ppm	ASTM D5185m		41	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		68	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		510	---	---
Calcium	ppm	ASTM D5185m		1186	---	---
Phosphorus	ppm	ASTM D5185m		619	---	---
Zinc	ppm	ASTM D5185m		697	---	---
Sulfur	ppm	ASTM D5185m		2971	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.9	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		3.6	---	---
Visc @ 100°C	cSt	ASTM D445		9.9	---	---

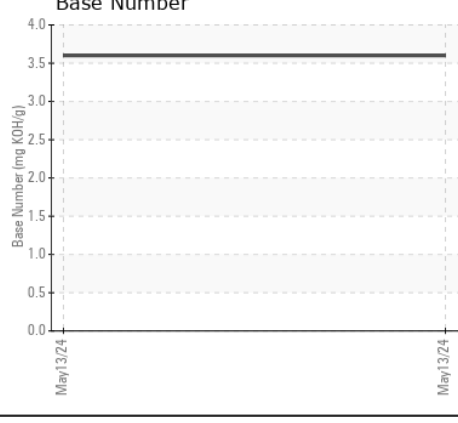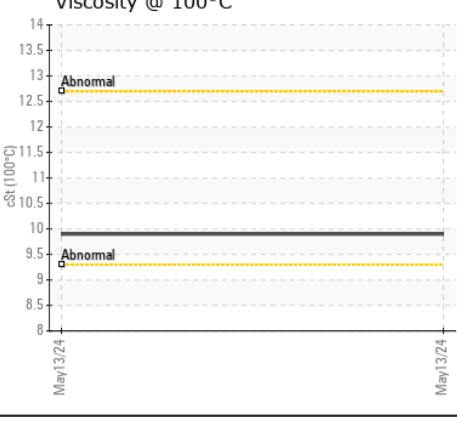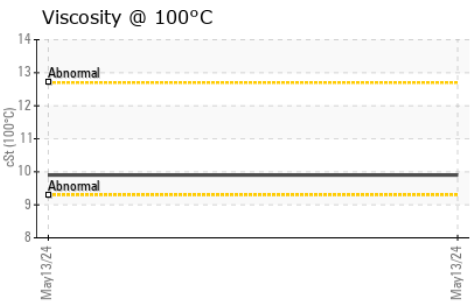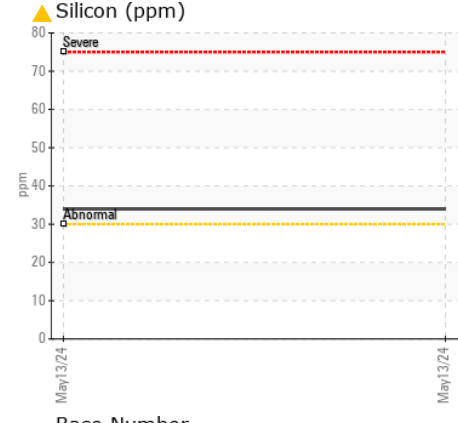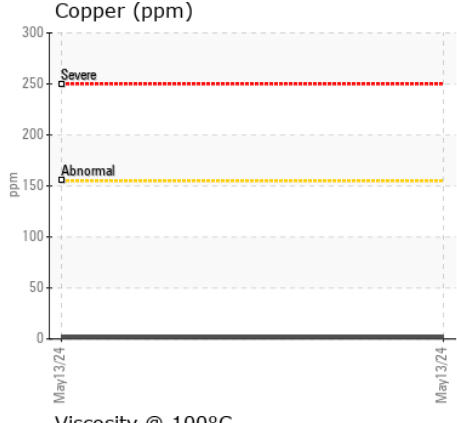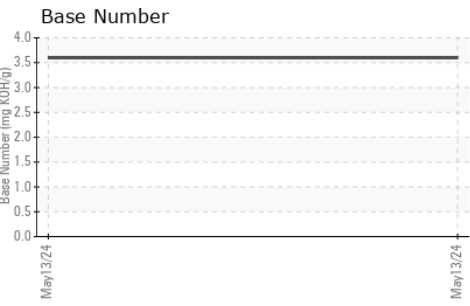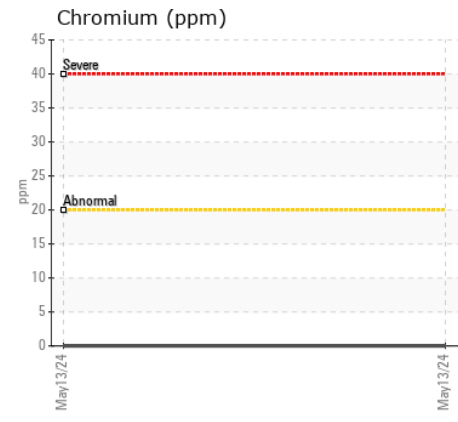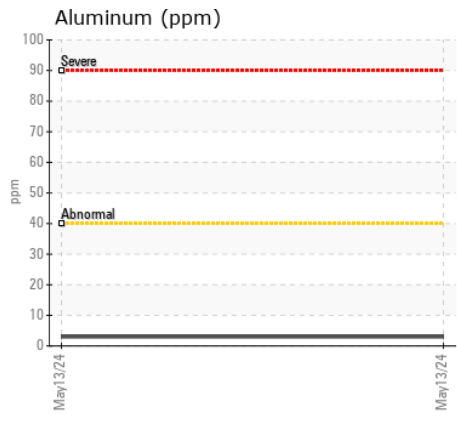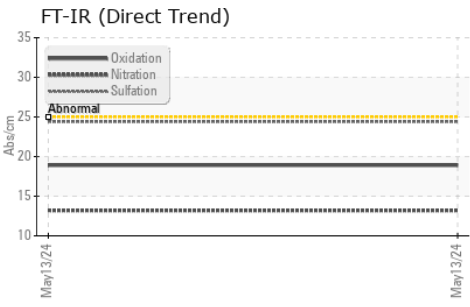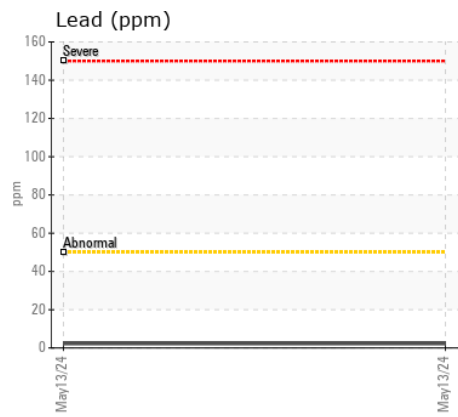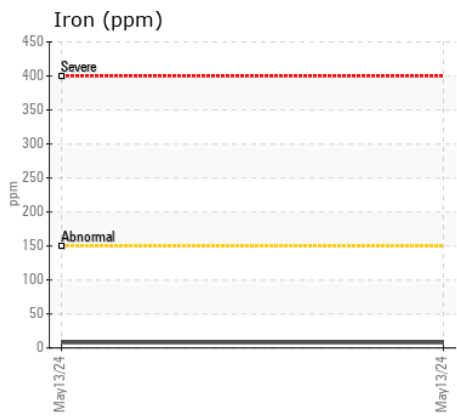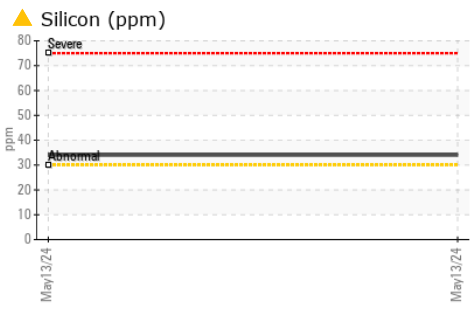

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : FSM1378698 **Received** : 22 May 2024  
**Lab Number** : 06187262 **Tested** : 23 May 2024  
**Unique Number** : 11044014 **Diagnosed** : 28 May 2024 - Jonathan Hester  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**FORENSIC & SCIENTIFIC TESTING**  
 275 N PERRY STREET  
 LAWRENCEVILLE, GA  
 US 30046  
 Contact: DOUG BYRON  
 dbyron@fast-lab.com  
 T: (770)449-4199  
 F: (770)449-4433

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)