



# OIL ANALYSIS REPORT

|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |

Machine Id  
**NOT GIVNE RPL06187264**

Component  
**Diesel Engine**

Fluid  
**{not provided} (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

| Test           | UOM | Method      | Limit/Abn | Current            | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|----------|----------|
| Sample Number  |     | Client Info |           | <b>RPL06187264</b> | ---      | ---      |
| Sample Date    |     | Client Info |           | <b>21 May 2024</b> | ---      | ---      |
| Machine Age    | mls | Client Info |           | <b>0</b>           | ---      | ---      |
| Oil Age        | mls | Client Info |           | <b>0</b>           | ---      | ---      |
| Filter Age     | mls | Client Info |           | <b>0</b>           | ---      | ---      |
| Oil Changed    |     | Client Info |           | <b>N/A</b>         | ---      | ---      |
| Filter Changed |     | Client Info |           | <b>N/A</b>         | ---      | ---      |
| Sample Status  |     |             |           | <b>NORMAL</b>      | ---      | ---      |

## WEAR

All component wear rates are normal.

|              |        |             |      |              |     |     |
|--------------|--------|-------------|------|--------------|-----|-----|
| Iron         | ppm    | ASTM D5185m | >100 | <b>15</b>    | --- | --- |
| Chromium     | ppm    | ASTM D5185m | >20  | <b>&lt;1</b> | --- | --- |
| Nickel       | ppm    | ASTM D5185m | >4   | <b>0</b>     | --- | --- |
| Titanium     | ppm    | ASTM D5185m |      | <b>0</b>     | --- | --- |
| Silver       | ppm    | ASTM D5185m | >3   | <b>&lt;1</b> | --- | --- |
| Aluminum     | ppm    | ASTM D5185m | >20  | <b>4</b>     | --- | --- |
| Lead         | ppm    | ASTM D5185m | >40  | <b>1</b>     | --- | --- |
| Copper       | ppm    | ASTM D5185m | >330 | <b>1</b>     | --- | --- |
| Tin          | ppm    | ASTM D5185m | >15  | <b>&lt;1</b> | --- | --- |
| Vanadium     | ppm    | ASTM D5185m |      | <b>0</b>     | --- | --- |
| White Metal  | scalar | *Visual     | NONE | <b>NONE</b>  | --- | --- |
| Yellow Metal | scalar | *Visual     | NONE | <b>NONE</b>  | --- | --- |

## CONTAMINATION

There is no indication of any contamination in the oil.


|                  |          |             |       |                |     |     |
|------------------|----------|-------------|-------|----------------|-----|-----|
| Silicon          | ppm      | ASTM D5185m | >25   | <b>7</b>       | --- | --- |
| Potassium        | ppm      | ASTM D5185m | >20   | <b>4</b>       | --- | --- |
| Fuel             |          | WC Method   | >5    | <b>&lt;1.0</b> | --- | --- |
| Water            |          | WC Method   | >0.2  | <b>NEG</b>     | --- | --- |
| Glycol           |          | WC Method   |       | <b>NEG</b>     | --- | --- |
| Soot %           | %        | *ASTM D7844 | >3    | <b>0.3</b>     | --- | --- |
| Nitration        | Abs/cm   | *ASTM D7624 | >20   | <b>9.0</b>     | --- | --- |
| Sulfation        | Abs/.1mm | *ASTM D7415 | >30   | <b>22.4</b>    | --- | --- |
| Silt             | scalar   | *Visual     | NONE  | <b>NONE</b>    | --- | --- |
| Debris           | scalar   | *Visual     | NONE  | <b>NONE</b>    | --- | --- |
| Sand/Dirt        | scalar   | *Visual     | NONE  | <b>NONE</b>    | --- | --- |
| Appearance       | scalar   | *Visual     | NORML | <b>NORML</b>   | --- | --- |
| Odor             | scalar   | *Visual     | NORML | <b>NORML</b>   | --- | --- |
| Emulsified Water | scalar   | *Visual     | >0.2  | <b>NEG</b>     | --- | --- |

## FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

|                  |          |             |     |              |     |     |
|------------------|----------|-------------|-----|--------------|-----|-----|
| Sodium           | ppm      | ASTM D5185m |     | <b>2</b>     | --- | --- |
| Boron            | ppm      | ASTM D5185m |     | <b>42</b>    | --- | --- |
| Barium           | ppm      | ASTM D5185m |     | <b>0</b>     | --- | --- |
| Molybdenum       | ppm      | ASTM D5185m |     | <b>49</b>    | --- | --- |
| Manganese        | ppm      | ASTM D5185m |     | <b>&lt;1</b> | --- | --- |
| Magnesium        | ppm      | ASTM D5185m |     | <b>486</b>   | --- | --- |
| Calcium          | ppm      | ASTM D5185m |     | <b>1673</b>  | --- | --- |
| Phosphorus       | ppm      | ASTM D5185m |     | <b>797</b>   | --- | --- |
| Zinc             | ppm      | ASTM D5185m |     | <b>951</b>   | --- | --- |
| Sulfur           | ppm      | ASTM D5185m |     | <b>2872</b>  | --- | --- |
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25 | <b>21.8</b>  | --- | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896  |     | <b>8.3</b>   | --- | --- |
| Visc @ 100°C     | cSt      | ASTM D445   |     | <b>13.0</b>  | --- | --- |

FT-IR (Direct Trend)

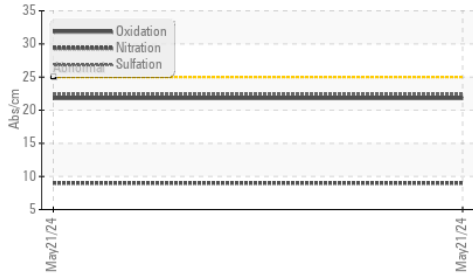


Base Number

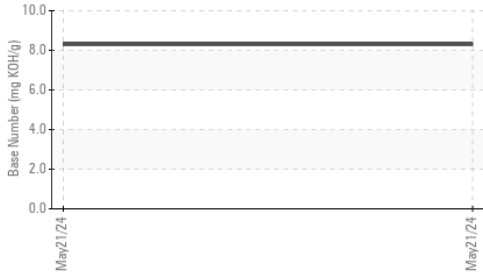


Viscosity @ 100°C




Ferrous Alloys

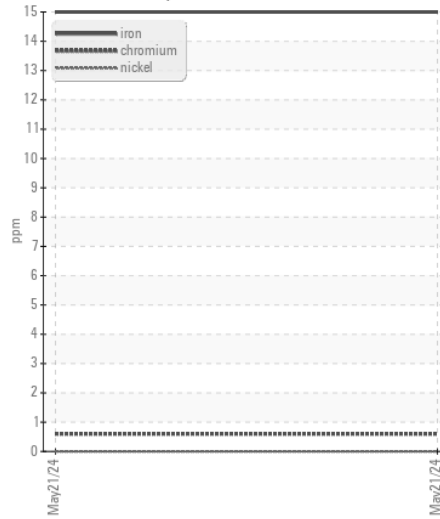


Non-ferrous Metals

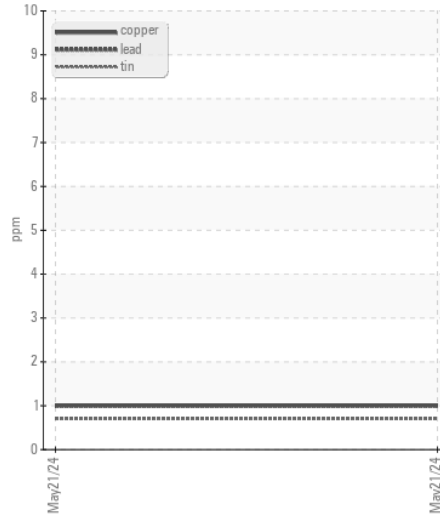

Viscosity @ 100°C

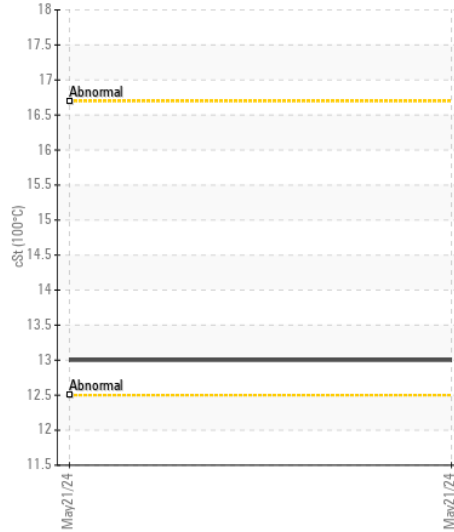

Base Number

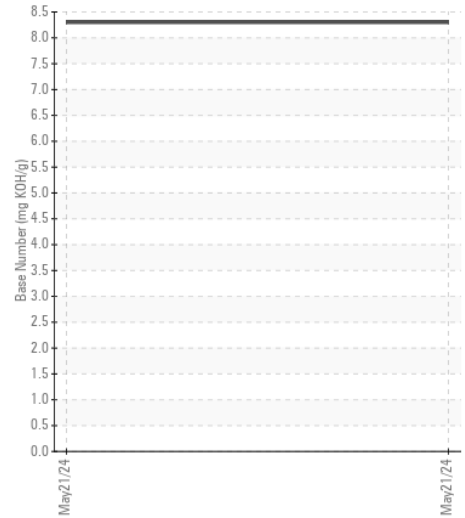

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : RPL06187264

Lab Number : 06187264

Unique Number : 11044016

Test Package : FLEET

Received : 22 May 2024

Tested : 23 May 2024

Diagnosed : 23 May 2024 - Wes Davis

RTL PACLEASE - 7008 - Phoenix

625 South 27th Ave

Phoenix, AZ

US 85009

Contact: Maurice Pilotte

PilotteM@rushenterprises.com

T: (602)566-5712

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)