



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	MARGINAL
FLUID CONDITION	NORMAL

Machine Id
937853
 Component
Diesel Engine
 Fluid
CHEVRON DELO 400 XLE 10W30 (--- QTS)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RY0123449	---	---
Sample Date		Client Info		14 Mar 2024	---	---
Machine Age	mls	Client Info		7000	---	---
Oil Age	mls	Client Info		0	---	---
Filter Age	mls	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				MARGINAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	43	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>4	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	1	---	---
Aluminum	ppm	ASTM D5185m	>20	8	---	---
Lead	ppm	ASTM D5185m	>40	1	---	---
Copper	ppm	ASTM D5185m	>330	6	---	---
Tin	ppm	ASTM D5185m	>15	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION









Light fuel dilution occurring. No other contaminants were detected in the oil.

Silicon	ppm	ASTM D5185m	>25	11	---	---
Potassium	ppm	ASTM D5185m	>20	8	---	---
Fuel	%	ASTM D3524	>5	▲ 3.6	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	1.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	13.4	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	26.4	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	---	---
Boron	ppm	ASTM D5185m		36	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		19	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		667	---	---
Calcium	ppm	ASTM D5185m	2900	1315	---	---
Phosphorus	ppm	ASTM D5185m	1100	768	---	---
Zinc	ppm	ASTM D5185m	1200	875	---	---
Sulfur	ppm	ASTM D5185m	4000	3282	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	22.3	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.3	6.5	---	---
Visc @ 100°C	cSt	ASTM D445	11.9	11.9	---	---

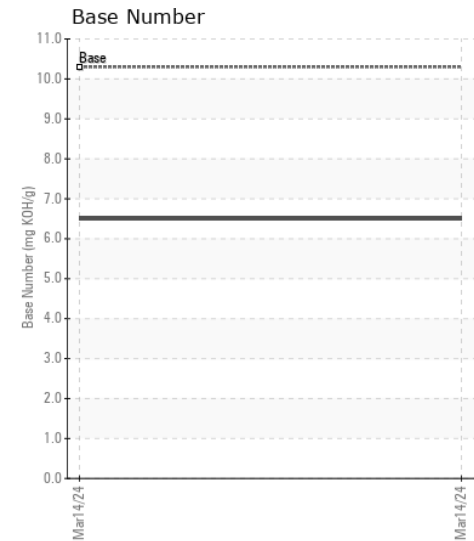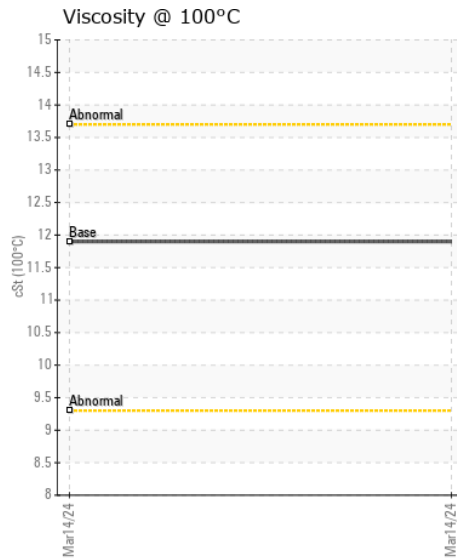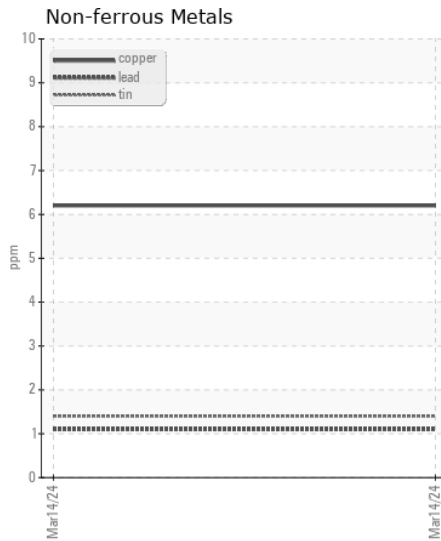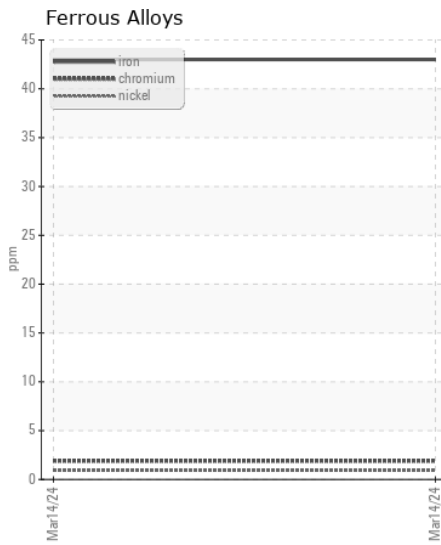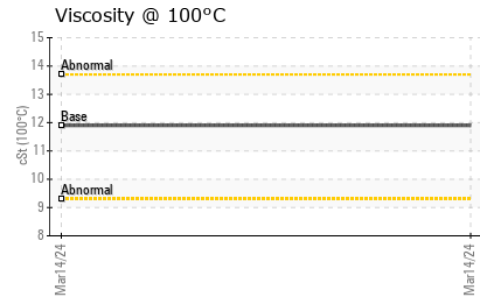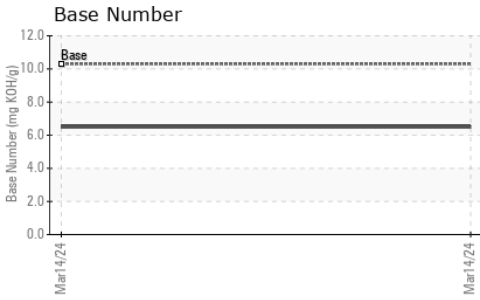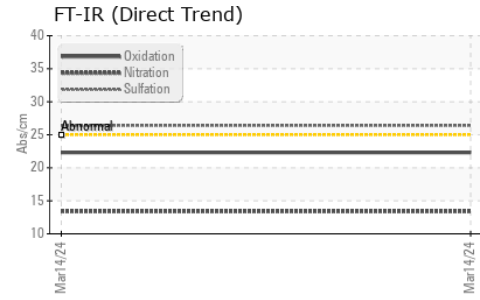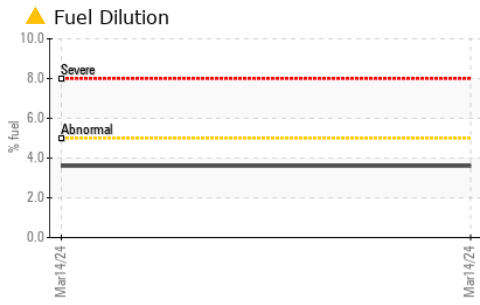

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : RY0123449

Lab Number : 06187328

Unique Number : 11044080

Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

Received : 22 May 2024

Tested : 28 May 2024

Diagnosed : 28 May 2024 - Wes Davis

Ryder Transportation Services

240 NE 71 ST

MIAMI, FL

US 33138

Contact: ANTHONY INGRAM

anthonyingram@creamoland.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)