



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ABNORMAL

Machine Id
10986
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (36 QTS)

RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0111406	GFL0111494	GFL0068833
Sample Date		Client Info		20 May 2024	26 Apr 2024	29 Mar 2024
Machine Age	hrs	Client Info		16356	16234	16084
Oil Age	hrs	Client Info		122	408	258
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>165	11	27	25
Chromium	ppm	ASTM D5185m	>5	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m	>2	0	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>20	2	4	4
Lead	ppm	ASTM D5185m	>150	0	0	0
Copper	ppm	ASTM D5185m	>90	<1	0	0
Tin	ppm	ASTM D5185m	>5	0	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION









Sodium and/or potassium levels are high.

Silicon	ppm	ASTM D5185m	>35	6	13	13
Potassium	ppm	ASTM D5185m	>20	6	16	16
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol	%	*ASTM D2982		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>7.5	0.3	0.8	0.7
Nitration	Abs/cm	*ASTM D7624	>20	7.3	10.8	10.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.5	20.9	20.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil.

Sodium	ppm	ASTM D5185m		▲ 138	▲ 366	▲ 379
Boron	ppm	ASTM D5185m	0	2	6	7
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	60	68	76	76
Manganese	ppm	ASTM D5185m	0	0	<1	<1
Magnesium	ppm	ASTM D5185m	1010	1013	838	889
Calcium	ppm	ASTM D5185m	1070	1127	923	971
Phosphorus	ppm	ASTM D5185m	1150	1097	919	981
Zinc	ppm	ASTM D5185m	1270	1351	1121	1167
Sulfur	ppm	ASTM D5185m	2060	3807	3216	3308
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.0	16.7	16.4
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	8.3	7.3	7.7
Visc @ 100°C	cSt	ASTM D445	15.4	13.5	13.1	13.1

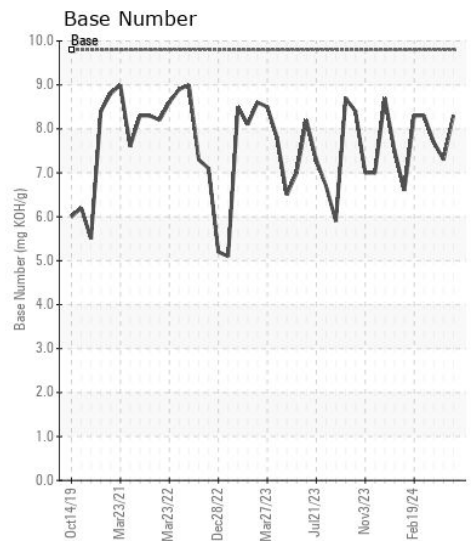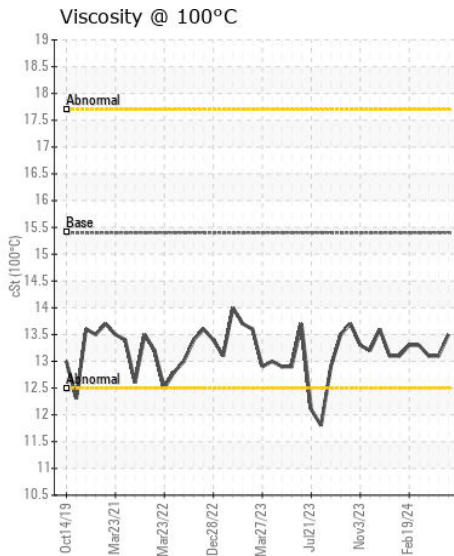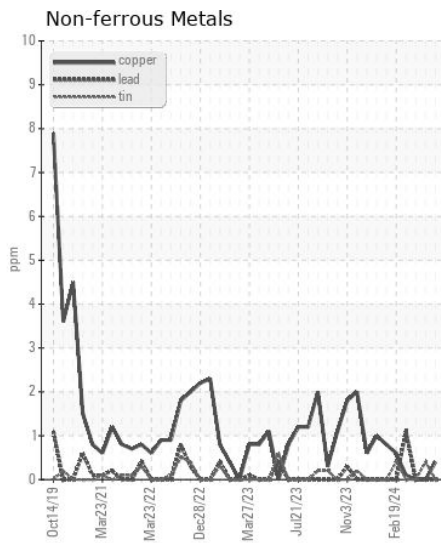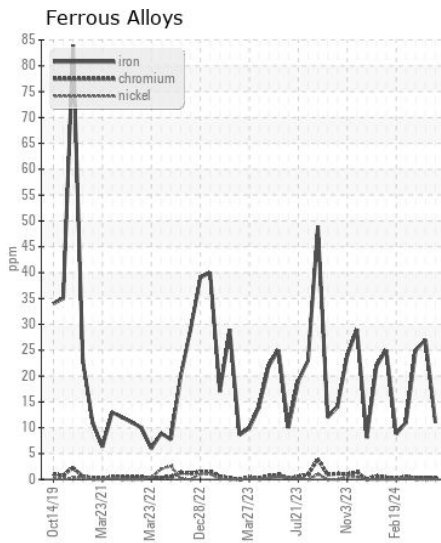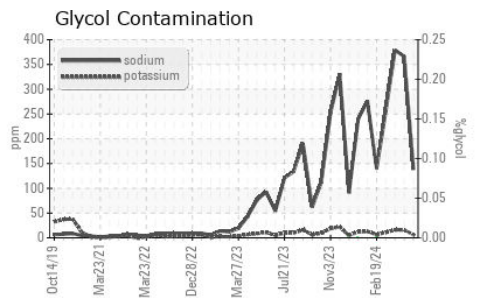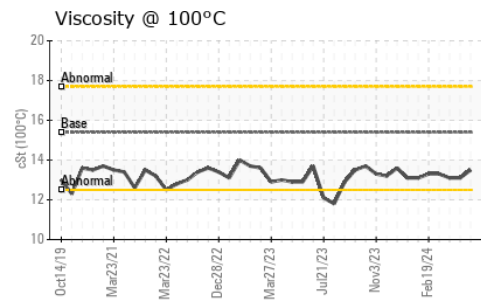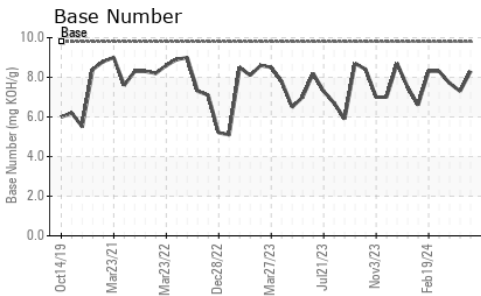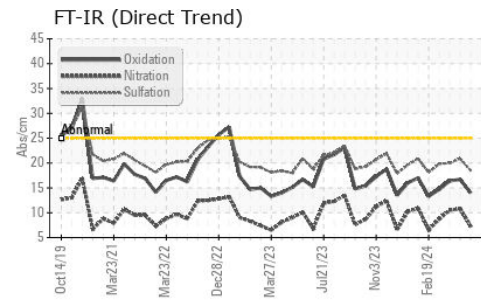

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0111406 **Received** : 22 May 2024
Lab Number : 06187500 **Tested** : 28 May 2024
Unique Number : 11044252 **Diagnosed** : 28 May 2024 - Sean Felton
Test Package : FLEET (Additional Tests: Glycol)

GFL Environmental - 073 - Warner Robins - Transwaste
 155 Story Road
 Warner Robins, GA
 US 31093
 Contact: Mike Taft

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: