



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
PALASYN 45 [8017561]
Machine Id
SULLIVAN PALATEK 23AE003618 - HULL COOP WEST MILL
Component
Compressor

RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		UCS06187831	---	---
Sample Date		Client Info		21 May 2024	---	---
Machine Age	hrs	Client Info		1934	---	---
Oil Age	hrs	Client Info		1934	---	---
Filter Age	hrs	Client Info		1100	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	<1	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m		0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>25	1	---	---
Lead	ppm	ASTM D5185m	>25	<1	---	---
Copper	ppm	ASTM D5185m	>50	5	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







Moderate concentration of visible dirt/debris present in the oil.

Silicon	ppm	ASTM D5185m	>25	12	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	MODER	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m	0.0	0	---	---
Barium	ppm	ASTM D5185m	0.0	1	---	---
Molybdenum	ppm	ASTM D5185m	0	0	---	---
Manganese	ppm	ASTM D5185m	0	0	---	---
Magnesium	ppm	ASTM D5185m	0.0	<1	---	---
Calcium	ppm	ASTM D5185m	0.0	4	---	---
Phosphorus	ppm	ASTM D5185m	966	436	---	---
Zinc	ppm	ASTM D5185m	0	11	---	---
Sulfur	ppm	ASTM D5185m	1309	713	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.172	0.54	---	---
Visc @ 40°C	cSt	ASTM D445	39.9	42.5	---	---

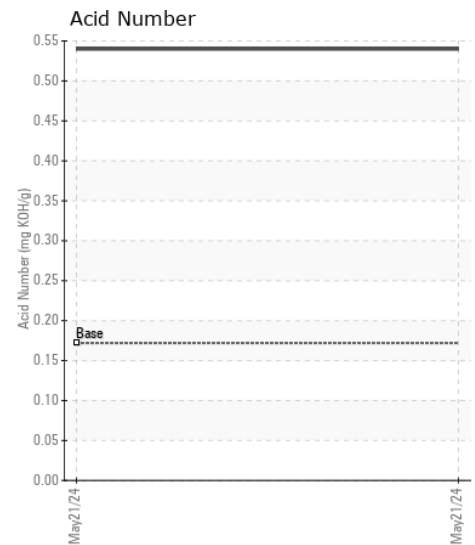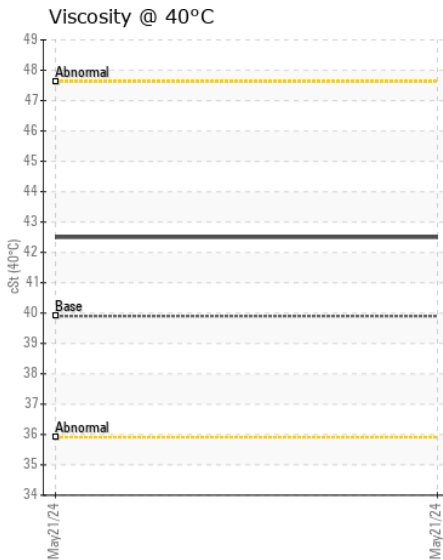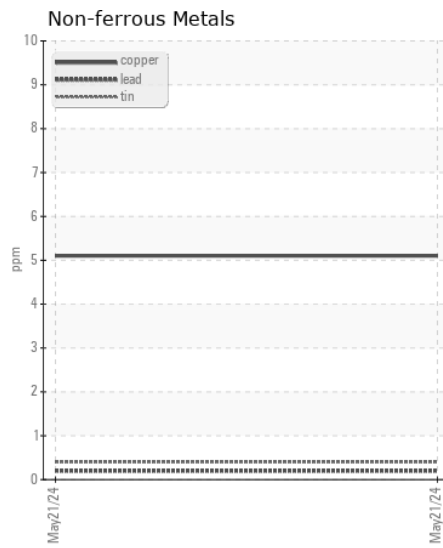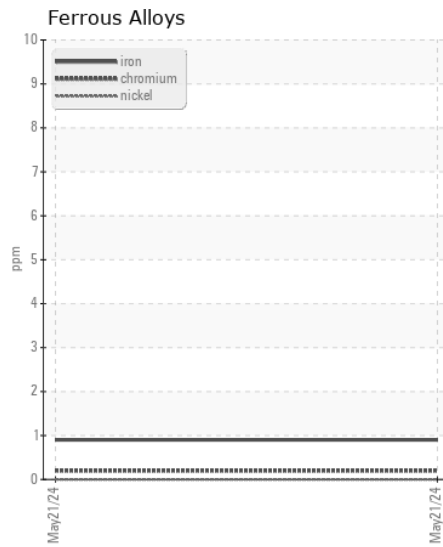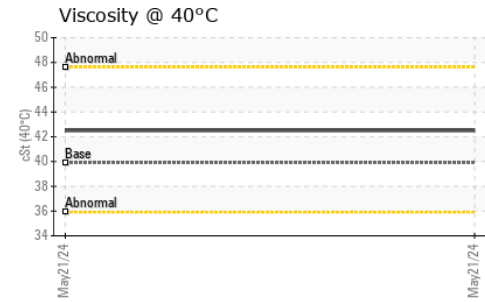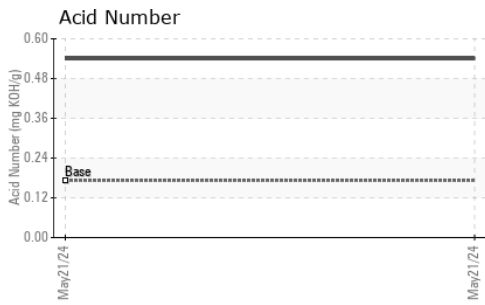

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : UCS06187831

Lab Number : 06187831

Unique Number : 11044583

Test Package : IND 2

Received : 22 May 2024

Tested : 23 May 2024

Diagnosed : 24 May 2024 - Sean Felton

LIFT PRO EQUIPMENT CO

SIoux FALLS, SD
US 57104

Contact: REUBEN
tim@liftproequipment.com

T: (605)339-6494

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)