



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id

LEB PD A

Component

Gearbox

Fluid

TRC MOLY ULTRA-TEC GEAR OIL 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR06187878	TR05936296	---
Sample Date		Client Info		15 May 2024	01 Jun 2023	---
Machine Age	yrs	Client Info		0	0	---
Oil Age	yrs	Client Info		2	1	---
Filter Age	yrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	73	72	---
Chromium	ppm	ASTM D5185m	>10	1	<1	---
Nickel	ppm	ASTM D5185m	>10	<1	0	---
Titanium	ppm	ASTM D5185m		<1	3	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m	>25	2	<1	---
Lead	ppm	ASTM D5185m	>50	<1	0	---
Copper	ppm	ASTM D5185m	>200	3	<1	---
Tin	ppm	ASTM D5185m	>10	<1	0	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	7	4	---
Potassium	ppm	ASTM D5185m	>20	2	<1	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	3	---
Boron	ppm	ASTM D5185m		126	161	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		<1	0	---
Manganese	ppm	ASTM D5185m		1	1	---
Magnesium	ppm	ASTM D5185m		<1	2	---
Calcium	ppm	ASTM D5185m		56	75	---
Phosphorus	ppm	ASTM D5185m		850	736	---
Zinc	ppm	ASTM D5185m		135	101	---
Sulfur	ppm	ASTM D5185m		18641	17636	---
Acid Number (AN)	mg KOH/g	ASTM D8045		1.36	0.98	---
Visc @ 40°C	cSt	ASTM D445	186	161	163	---
Visc @ 100°C	cSt	ASTM D445	19.3	17.9	18.2	---
Viscosity Index (VI)	Scale	ASTM D2270	125	122	124	---

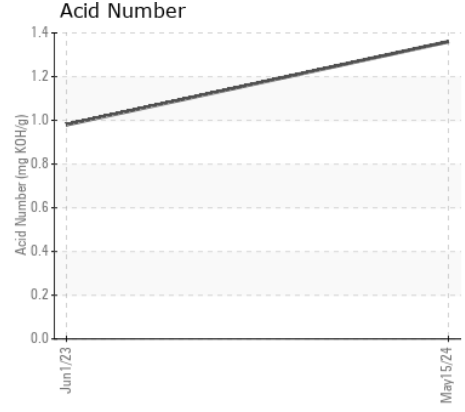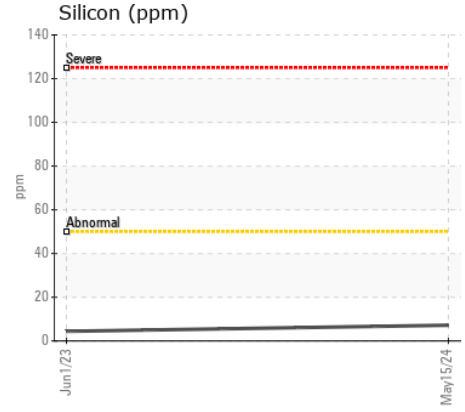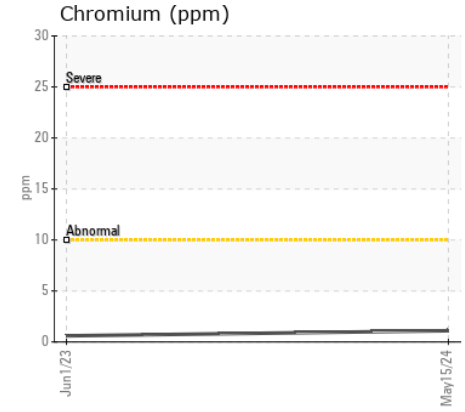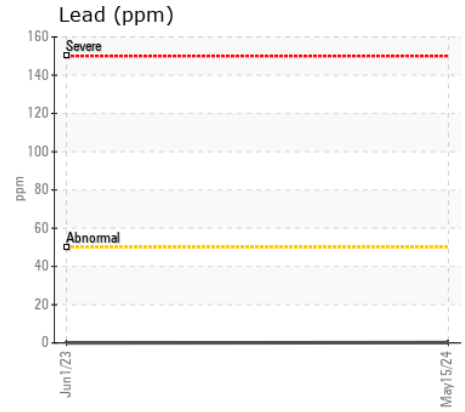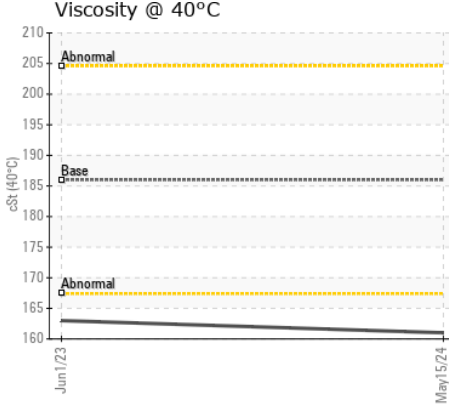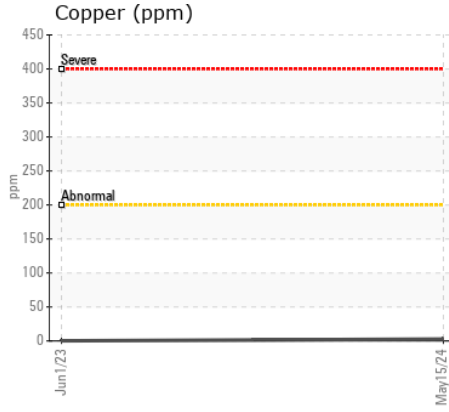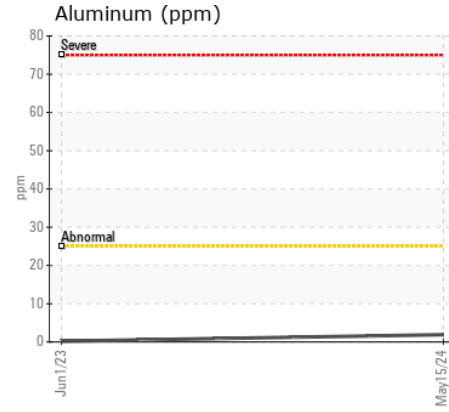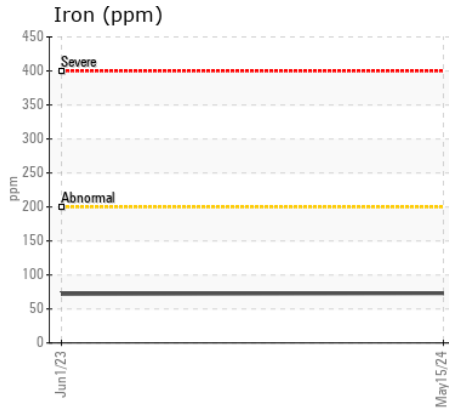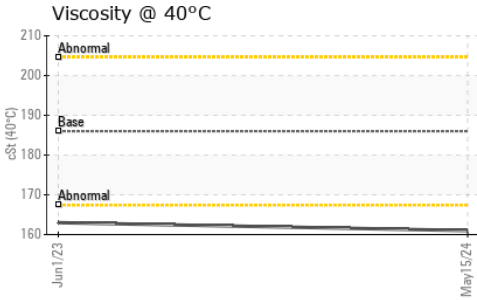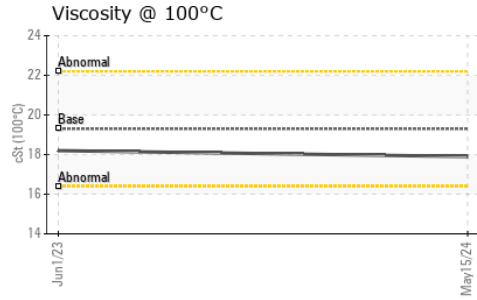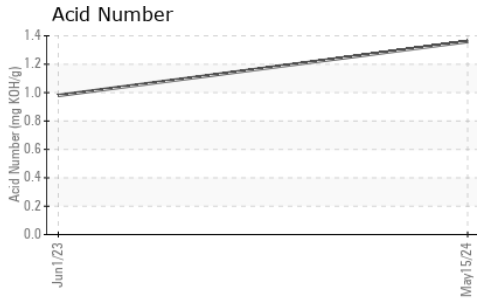

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR06187878
Lab Number : 06187878
Unique Number : 11044630
Test Package : MOB 2 (Additional Tests: KV100, VI)

Received : 22 May 2024
Tested : 24 May 2024
Diagnosed : 24 May 2024 - Wes Davis

CHRIST BROTHERS PRODUCTS
 820 S FRITZ
 LEBANON, IL
 US 62254
 Contact: BRUCE COWELL

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: