



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id

LEB REC CAL

Component

Gearbox

Fluid

TRC MOLY ULTRA-TEC GEAR OIL 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR06187881	TR05936278	---
Sample Date		Client Info		15 May 2024	01 Jun 2023	---
Machine Age	yrs	Client Info		0	0	---
Oil Age	yrs	Client Info		2	1	---
Filter Age	yrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	7	7	---
Chromium	ppm	ASTM D5185m	>10	<1	0	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m	>25	1	0	---
Lead	ppm	ASTM D5185m	>50	<1	0	---
Copper	ppm	ASTM D5185m	>200	2	<1	---
Tin	ppm	ASTM D5185m	>10	<1	0	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	15	7	---
Potassium	ppm	ASTM D5185m	>20	1	0	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	2	---
Boron	ppm	ASTM D5185m		294	223	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		<1	<1	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		4	7	---
Calcium	ppm	ASTM D5185m		35	33	---
Phosphorus	ppm	ASTM D5185m		1047	794	---
Zinc	ppm	ASTM D5185m		16	17	---
Sulfur	ppm	ASTM D5185m		22447	19111	---
Acid Number (AN)	mg KOH/g	ASTM D8045		1.98	1.47	---
Visc @ 40°C	cSt	ASTM D445	186	149	151	---
Visc @ 100°C	cSt	ASTM D445	19.3	16.4	16.5	---
Viscosity Index (VI)	Scale	ASTM D2270	125	116	116	---

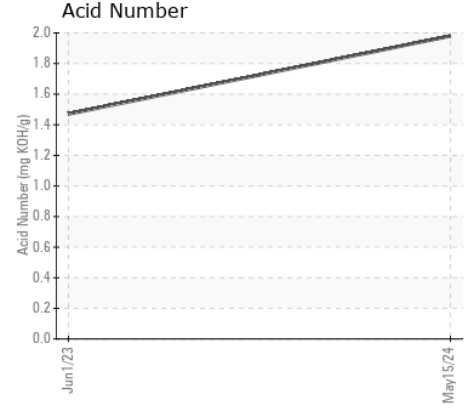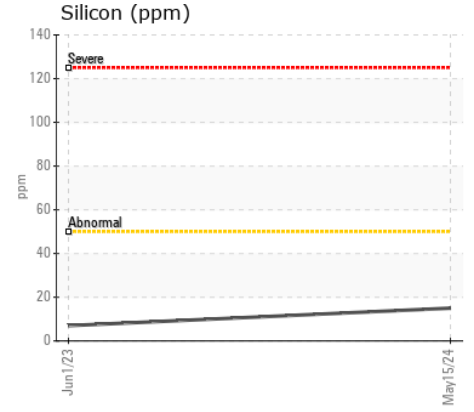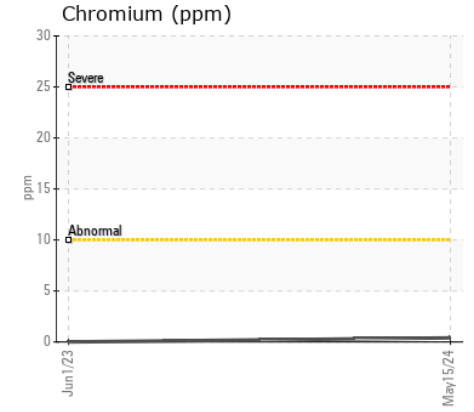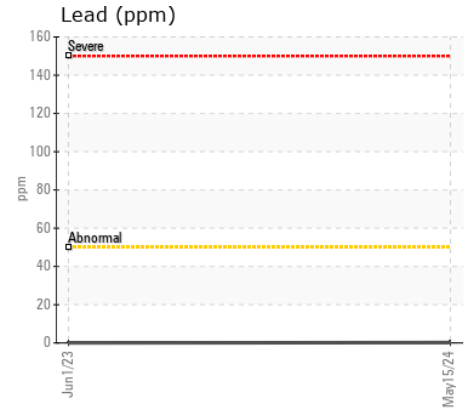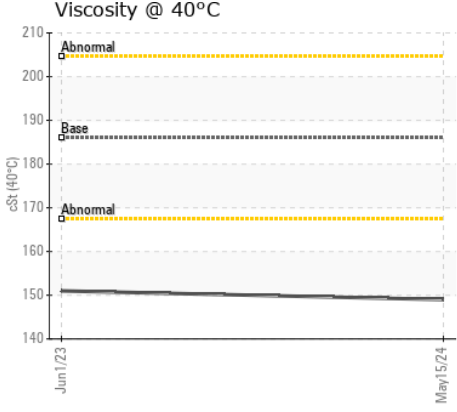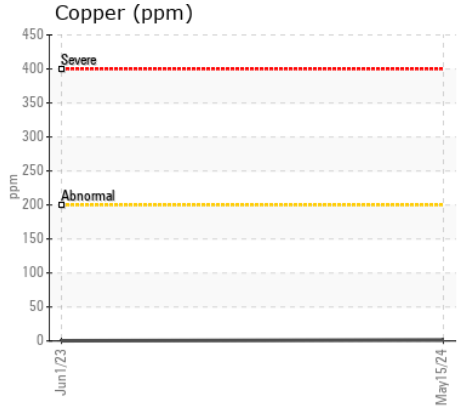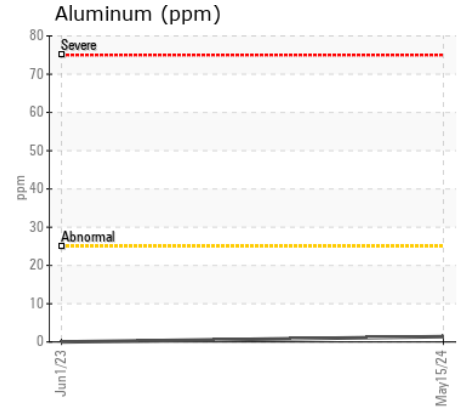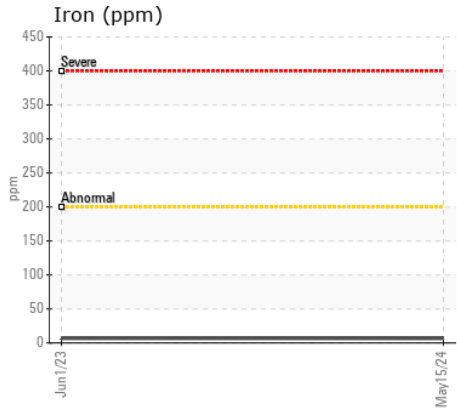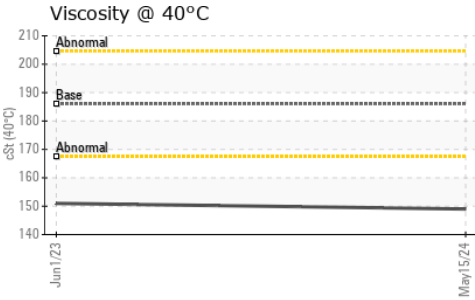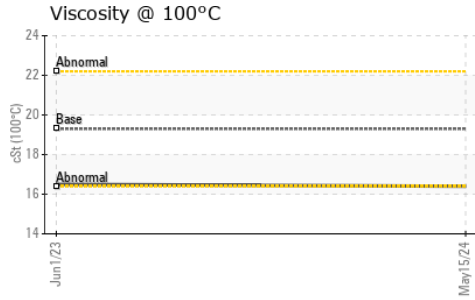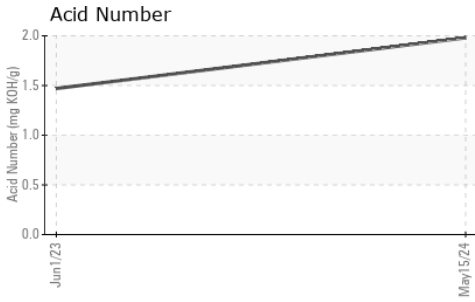

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR06187881 **Received** : 22 May 2024
Lab Number : 06187881 **Tested** : 23 May 2024
Unique Number : 11044633 **Diagnosed** : 23 May 2024 - Wes Davis
Test Package : MOB 2 (Additional Tests: KV100, VI)

CHRIST BROTHERS PRODUCTS
 820 S FRITZ
 LEBANON, IL
 US 62254
 Contact: BRUCE COWELL

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: