



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 744K 047-0043
Component
Transmission (Auto)
Fluid
SCHAEFFER 315 SIMPLEX SUPREME (8 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: Transmission sample. 16335 hours)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0868285	WC0868451	WC0815014
Sample Date		Client Info		18 May 2024	04 Dec 2023	08 Aug 2023
Machine Age	hrs	Client Info		16335	15336	14298
Oil Age	hrs	Client Info		15336	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	Not Changed
Filter Changed		Client Info		Not Changed	Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	8	7	6
Chromium	ppm	ASTM D5185m	>5	<1	0	<1
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>5	1	0	0
Aluminum	ppm	ASTM D5185m	>50	1	<1	3
Lead	ppm	ASTM D5185m	>50	<1	0	0
Copper	ppm	ASTM D5185m	>225	6	8	5
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	4	3	3
Potassium	ppm	ASTM D5185m	>20	3	0	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	<1	<1
Boron	ppm	ASTM D5185m	100	1	2	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m	0	2	1	<1
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	0	15	14	14
Calcium	ppm	ASTM D5185m	4300	2928	2771	3298
Phosphorus	ppm	ASTM D5185m	1400	1044	1137	1231
Zinc	ppm	ASTM D5185m	1700	1206	1158	1326
Sulfur	ppm	ASTM D5185m	3800	4002	3804	5076
Visc @ 40°C	cSt	ASTM D445	59	49.0	48.8	49.7

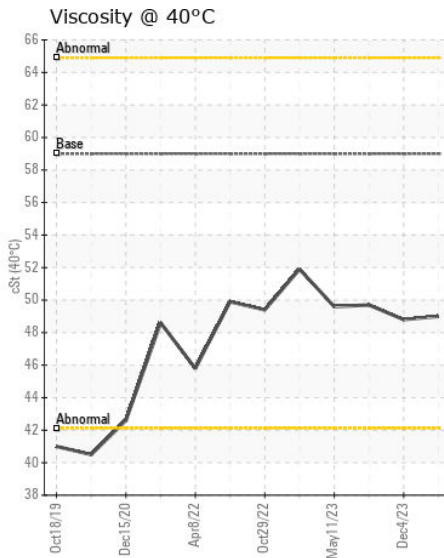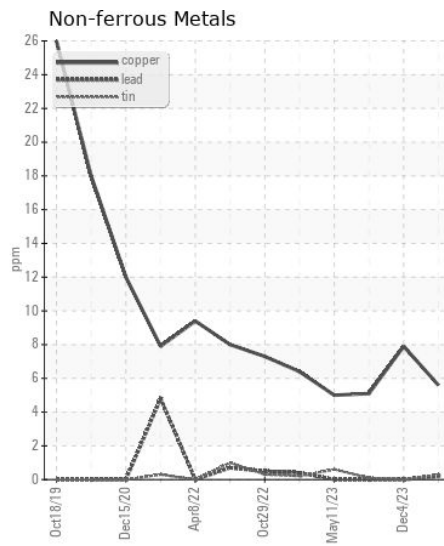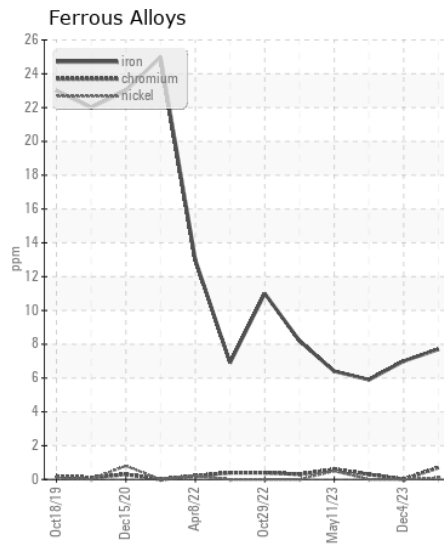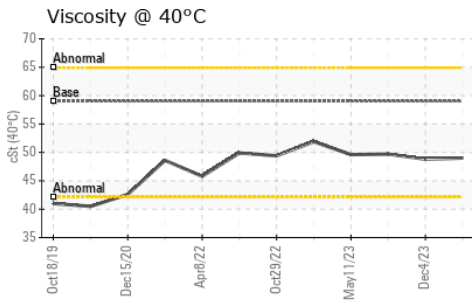

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0868285
Lab Number : 06188125
Unique Number : 11044877
Test Package : CONST
Received : 22 May 2024
Tested : 23 May 2024
Diagnosed : 24 May 2024 - Sean Felton

SHIMMICK CONSTRUCTION
 5535 TRAILHEAD DRIVE
 CHATTANOOGA, TN
 US 37415
 Contact: DANIEL LISELLA
 daniel.lisella@shimmick.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: