

Machine Id
HYUNDAI L-6
Component
Transmission (Manual)
Fluid
FLEETLINE SUPERFLEET XHD 15W40 (8 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0109965	LP0001592	LP0001062
Sample Date		Client Info		14 May 2024	01 Mar 2024	21 Dec 2023
Machine Age	hrs	Client Info		4788	4515	4127
Oil Age	hrs	Client Info		273	388	382
Filter Age	hrs	Client Info		273	388	382
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	15	21	25
Chromium	ppm	ASTM D5185m	>5	0	<1	0
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>7	<1	0	<1
Aluminum	ppm	ASTM D5185m	>25	<1	3	2
Lead	ppm	ASTM D5185m	>45	0	0	0
Copper	ppm	ASTM D5185m	>225	1	2	2
Tin	ppm	ASTM D5185m	>10	0	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	4	6	4
Potassium	ppm	ASTM D5185m	>20	0	2	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

Sodium	ppm	ASTM D5185m		3	1	4
Boron	ppm	ASTM D5185m		19	35	29
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		47	58	58
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		524	706	825
Calcium	ppm	ASTM D5185m		1745	1362	1236
Phosphorus	ppm	ASTM D5185m		1031	1162	1047
Zinc	ppm	ASTM D5185m		1140	1192	1210
Sulfur	ppm	ASTM D5185m		3898	3618	3296
Acid Number (AN)	mg KOH/g	ASTM D8045		1.24	1.68	1.05
Visc @ 40°C	cSt	ASTM D445	118	72.0	71.5	69.0

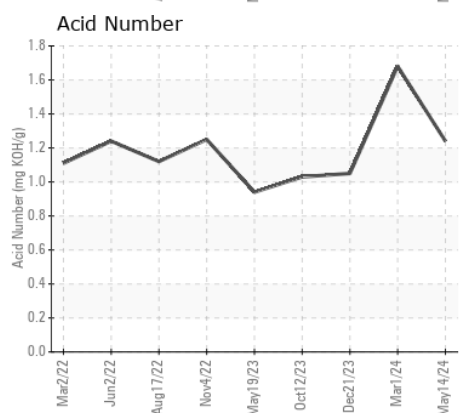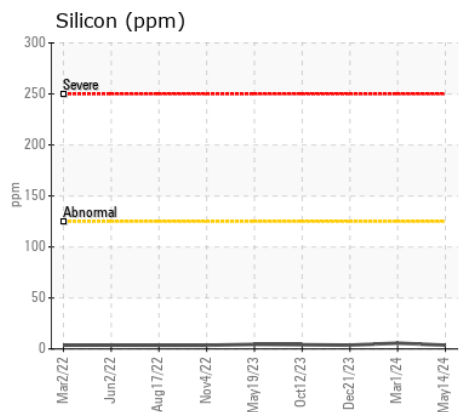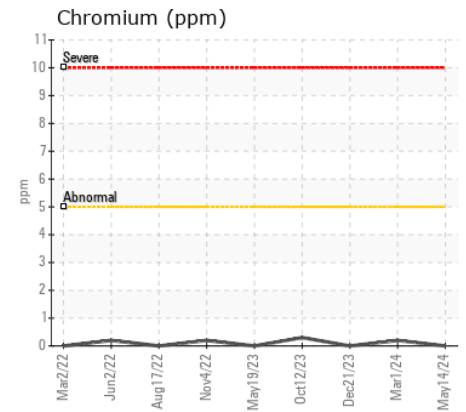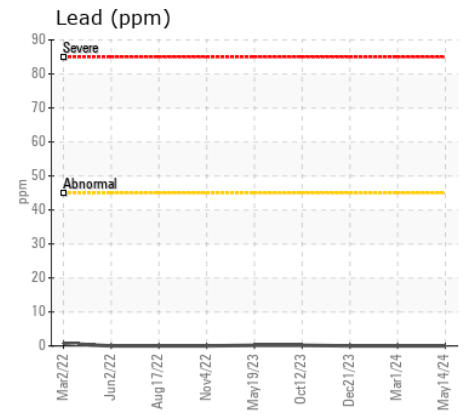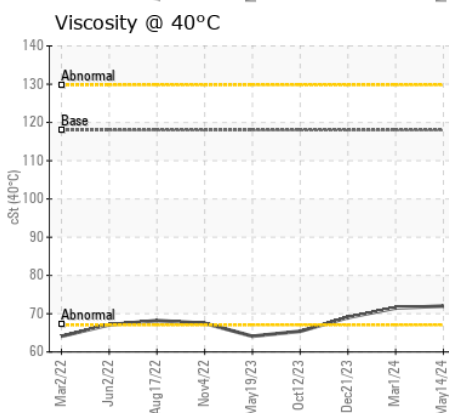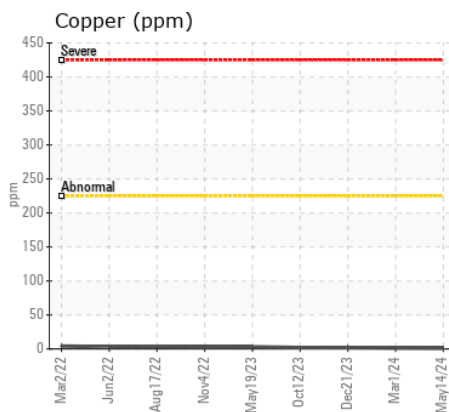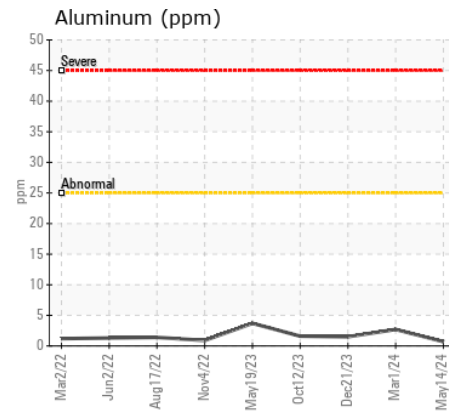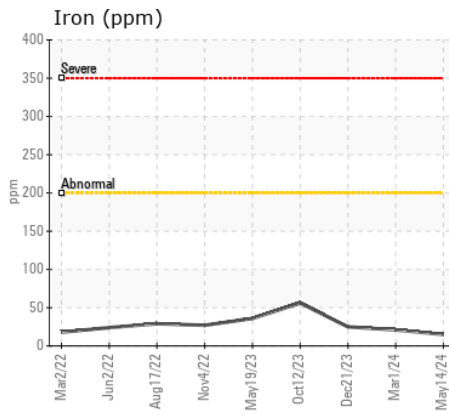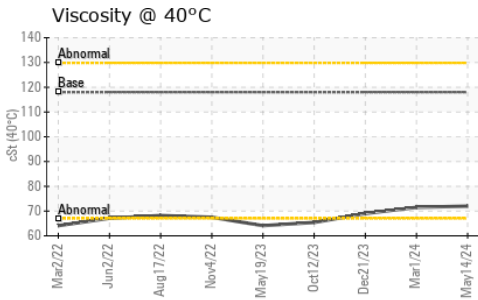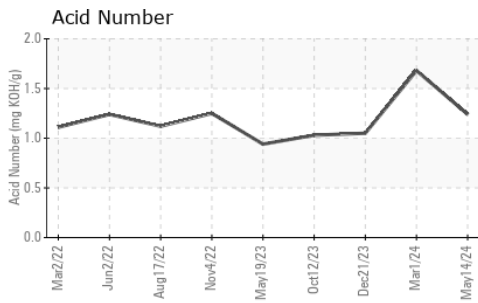

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0109965
Lab Number : 06188251
Unique Number : 11045003
Test Package : MOB 2
Received : 22 May 2024
Tested : 24 May 2024
Diagnosed : 24 May 2024 - Wes Davis

S.M. LORUSSO & SONS
 221 NORFOLK ST.
 WALPOLE, MA
 US 02081
 Contact: PAUL BECKMAN
 pbeckman@smlorusso.com
 T: (508)668-2603
 F: (508)660-0232

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)