

Machine Id SZLG730223 Component Diesel Engine Fluid {not provided} (---- QTS)

RECOMMENDATION

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

All component wear rates are normal.


CONTAMINATION


There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0910959	WC0614664	
Sample Date		Client Info		21 Mar 2024	17 Nov 2021	
Machine Age	hrs	Client Info		6757	3597	
Oil Age	hrs	Client Info		0	3597	
Filter Age	hrs	Client Info		0	3597	
Oil Changed		Client Info		Changed	Changed	
Filter Changed		Client Info		Changed	Changed	
Sample Status				ABNORMAL	NORMAL	
Iron	ppm	ASTM D5185m	>100	13	16	
Chromium	ppm	ASTM D5185m	>20	<1	<1	
Nickel	ppm	ASTM D5185m	>4	0	0	
Titanium	ppm	ASTM D5185m		0	<1	
Silver	ppm	ASTM D5185m	>3	<1	0	
Aluminum	ppm	ASTM D5185m	>20	3	6	
Lead	ppm	ASTM D5185m	>40	0	<1	
Copper	ppm	ASTM D5185m	>330	5	4	
Tin	ppm	ASTM D5185m	>15	<1	<1	
Vanadium	ppm	ASTM D5185m		<1	<1	
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Silicon	ppm	ASTM D5185m	>25	5	5	
Potassium	ppm	ASTM D5185m	>20	0	<1	
Fuel	%	ASTM D3524	>5	6 .9	2.6	
Water		WC Method	>0.2	NEG	NEG	
Glycol		WC Method		NEG	NEG	
Soot %	%	*ASTM D7844	>3	0.2	0.2	
Nitration	Abs/cm	*ASTM D7624	>20	8.7	8.3	
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.6	22.9	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	
Sodium	ppm	ASTM D5185m		4	5	
Boron	ppm	ASTM D5185m		336	282	
Barium	ppm	ASTM D5185m		0	0	
Molybdenum	ppm	ASTM D5185m		88	112	
Manganese	ppm	ASTM D5185m		<1	<1	
Magnesium	ppm	ASTM D5185m		390	554	
Calcium	ppm	ASTM D5185m		1679	1511	
Phosphorus	ppm	ASTM D5185m		1017	761	
Zinc	ppm	ASTM D5185m		1225	930	
Sulfur	ppm	ASTM D5185m		3502	2339	
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.9	20.1	
Base Number (BN)	mg KOH/g	ASTM D2896		7.4	7.5	
Visc @ 100°C	cSt	ASTM D445		11.3	12.3	
				\sim		

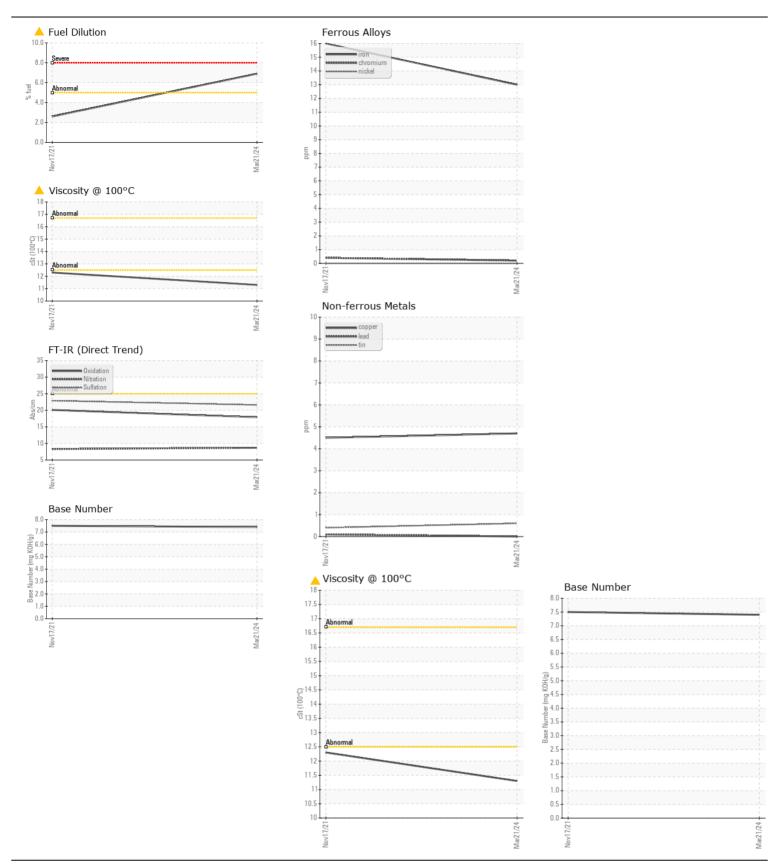

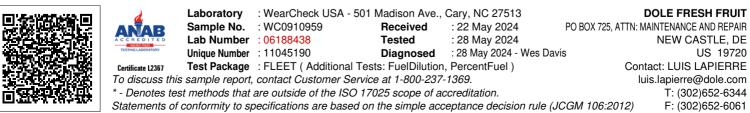

Contact/Location: LUIS LAPIERRE - DOLWIL Page 2 of 2