



# WEAR CHECK

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	SEVERE
FLUID CONDITION	ABNORMAL

Machine Id  
**SZLG730235**  
 Component  
**Diesel Engine**  
 Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

### WEAR

All component wear rates are normal.









### CONTAMINATION

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0910946</b>	WC0590516	WC0452266
Sample Date		Client Info		<b>05 May 2024</b>	20 Aug 2021	10 Aug 2020
Machine Age	hrs	Client Info		<b>6166</b>	3304	1552
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	N/A	N/A
Filter Changed		Client Info		<b>Changed</b>	N/A	N/A
Sample Status				<b>SEVERE</b>	ABNORMAL	NORMAL
Iron	ppm	ASTM D5185m	>100	<b>11</b>	10	15
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	2	12
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	2	4
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>330	<b>1</b>	5	7
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silicon	ppm	ASTM D5185m	>25	<b>5</b>	4	6
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	1	4
Fuel	%	ASTM D3524	>5	<b>▲ 9.2</b>	▲ 4.7	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.0</b>	7.9	8.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.3</b>	21.2	19.2
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG
Sodium	ppm	ASTM D5185m		<b>2</b>	3	4
Boron	ppm	ASTM D5185m		<b>330</b>	334	110
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>80</b>	83	42
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>352</b>	454	662
Calcium	ppm	ASTM D5185m		<b>1654</b>	1447	1470
Phosphorus	ppm	ASTM D5185m		<b>1002</b>	777	685
Zinc	ppm	ASTM D5185m		<b>1194</b>	932	725
Sulfur	ppm	ASTM D5185m		<b>3469</b>	2530	2355
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.0</b>	18.3	14.7
Base Number (BN)	mg KOH/g	ASTM D2896		<b>6.0</b>	6.5	8.1
Visc @ 100°C	cSt	ASTM D445		<b>▲ 10.5</b>	▲ 12.0	12.7

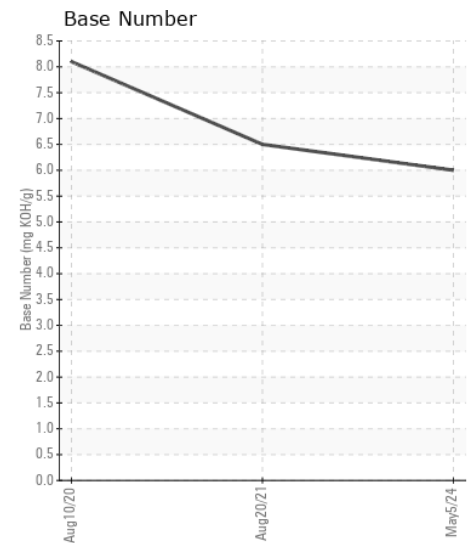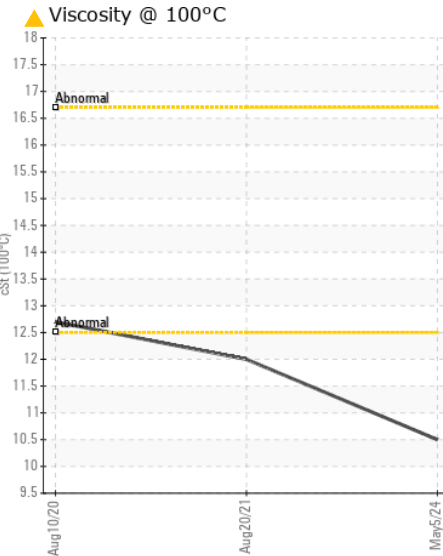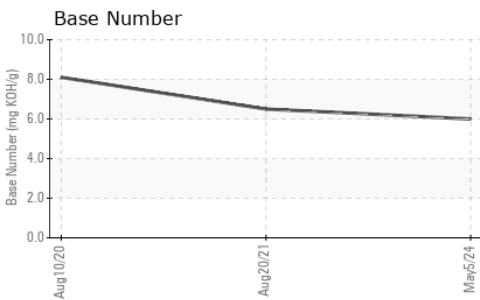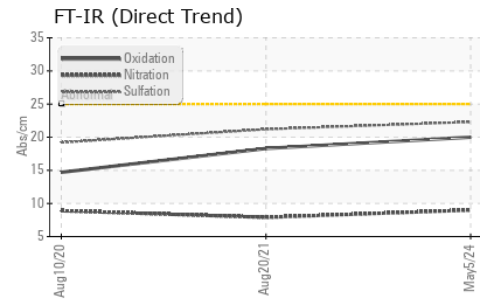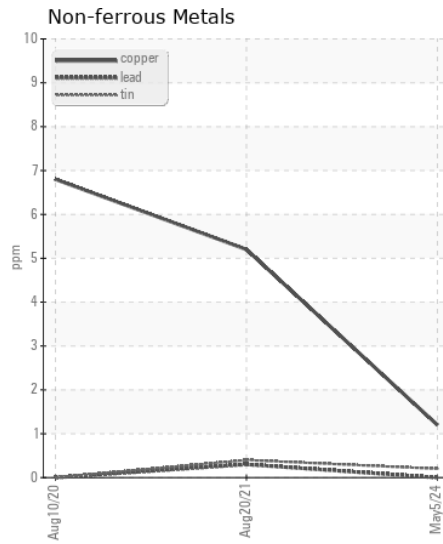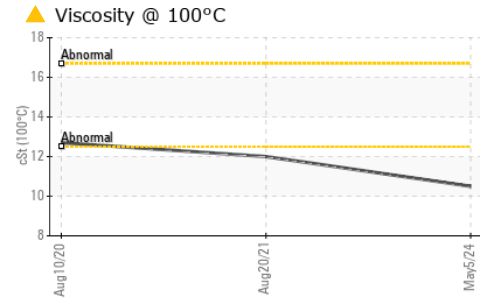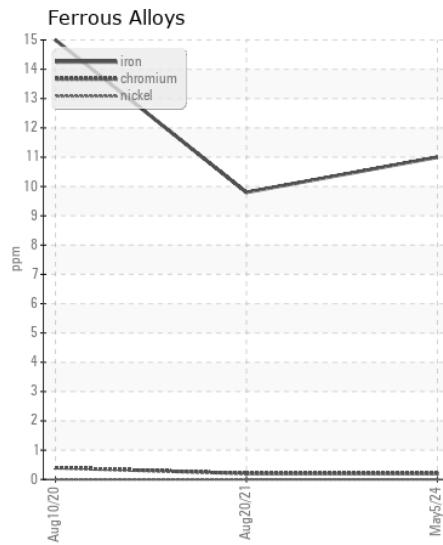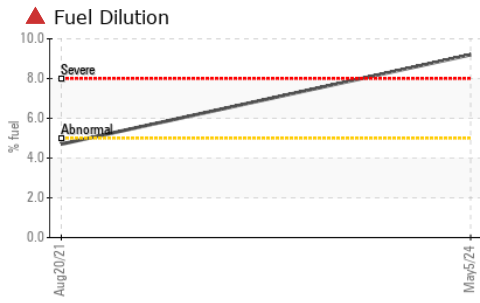

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0910946 **Received** : 22 May 2024  
**Lab Number** : 06188455 **Tested** : 28 May 2024  
**Unique Number** : 11045207 **Diagnosed** : 28 May 2024 - Wes Davis  
**Test Package** : FLEET ( Additional Tests: PercentFuel )

**DOLE FRESH FRUIT**  
 PO BOX 725, ATTN: MAINTENANCE AND REPAIR  
 NEW CASTLE, DE  
 US 19720

Contact: LUIS LAPIERRE  
 luis.lapierre@dole.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (302)652-6344  
 F: (302)652-6061