



WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

[05W46868]

Machine Id

JOHN DEERE 333G 1T0333GMCPF455888

Component

Diesel Engine

Fluid

JOHN DEERE ENGINE OIL PLUS 50 II 0W40 (3 GAL)

### RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0217983	---	---
Sample Date		Client Info		20 May 2024	---	---
Machine Age	hrs	Client Info		473	---	---
Oil Age	hrs	Client Info		473	---	---
Filter Age	hrs	Client Info		473	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

### WEAR

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>51	42	---	---
Chromium	ppm	ASTM D5185m	>11	<1	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	<1	---	---
Aluminum	ppm	ASTM D5185m	>31	6	---	---
Lead	ppm	ASTM D5185m	>26	2	---	---
Copper	ppm	ASTM D5185m	>26	▲ 169	---	---
Tin	ppm	ASTM D5185m	>4	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

### CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	49	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Fuel		WC Method	>2.1	<1.0	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.3	---	---
Nitration	Abs/cm	*ASTM D7624	>20	7.5	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.7	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>31	17	---	---
Boron	ppm	ASTM D5185m		158	---	---
Barium	ppm	ASTM D5185m		2	---	---
Molybdenum	ppm	ASTM D5185m		251	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		775	---	---
Calcium	ppm	ASTM D5185m		1960	---	---
Phosphorus	ppm	ASTM D5185m		966	---	---
Zinc	ppm	ASTM D5185m		1180	---	---
Sulfur	ppm	ASTM D5185m		3450	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.2	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	7.5	---	---
Visc @ 100°C	cSt	ASTM D445	14	12.4	---	---

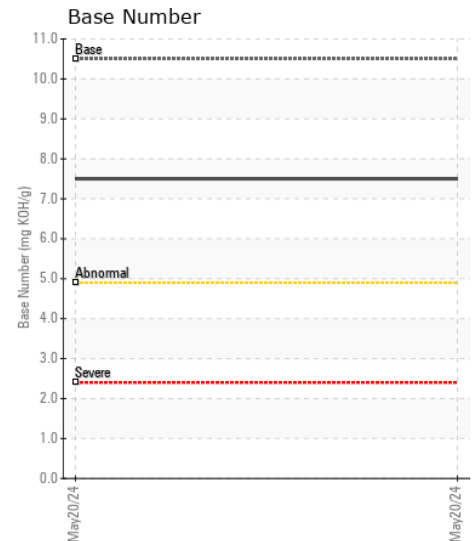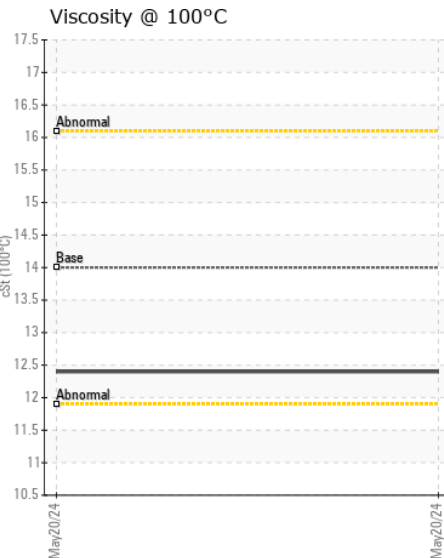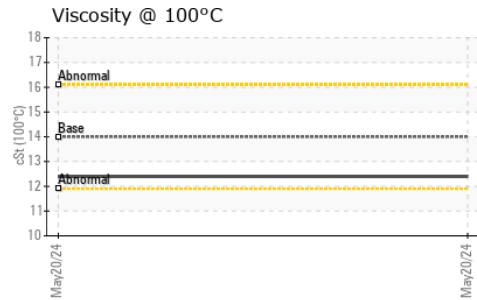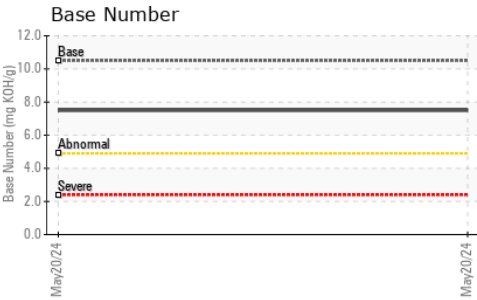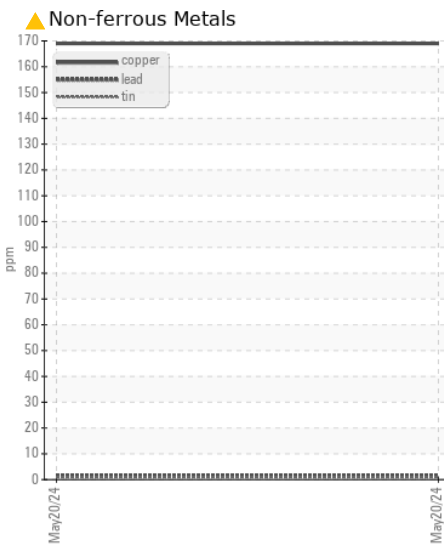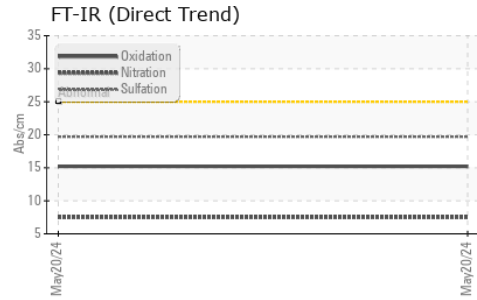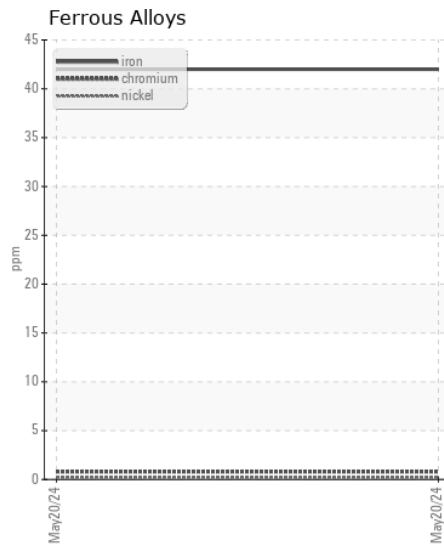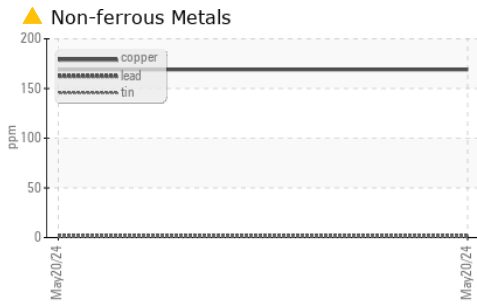

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0217983 **Received** : 22 May 2024  
**Lab Number** : 06188465 **Tested** : 28 May 2024  
**Unique Number** : 11045217 **Diagnosed** : 28 May 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: TBN )

**JRE - MANASSAS PARK**  
 9107 OWENS DRIVE  
 MANASSAS PARK, VA  
 US 20111

Contact: DON VEST  
 dvest@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (703)631-8500  
 F: (703)631-4715