

Machine Id BB12044 Component Diesel Engine Fluid DIESEL ENGINE OIL SAE 15W40 (--- QTS)

					~~~~~		
RECOMMENDATION	Test	UOM	Method	Limit/Abn	Current	History1	History2
Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.	Sample Number		Client Info		WC0919712	WC0897191	WC0801227
	Sample Date		Client Info		10 May 2024	15 Jan 2024	06 Jul 2023
	Machine Age	mls	Client Info		60438	0	0
	Oil Age	mls	Client Info		0	0	0
	Filter Age	mls	Client Info		0	0	0
	Oil Changed		Client Info		Changed	Changed	Changed
	Filter Changed		Client Info		Changed	Changed	Changed
	Sample Status				NORMAL	NORMAL	NORMAL
	Iron		ASTM D5185m	. 100	44	7	6
WEAR Metal levels are typical for a new component breaking in.	Iron Chromium	ppm	ASTM D5185m		11 <1		6 <1
		ppm				<1	
	Nickel	ppm	ASTM D5185m	>4	<1	0	<1
	Titanium	ppm	ASTM D5185m	0	<1	0	<1
	Silver	ppm	ASTM D5185m		<1	0	0
	Aluminum	ppm	ASTM D5185m		9	7	6
	Lead	ppm	ASTM D5185m		0	0	0
	Copper	ppm	ASTM D5185m		2	2	1
	Tin	ppm	ASTM D5185m	>15	<1	<1	<1
	Vanadium	ppm	ASTM D5185m		<1	0	0
	White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
	Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
CONTAMINATION There is no indication of any contamination in the oil.	Silicon	ppm	ASTM D5185m	>25	6	4	3
	Potassium	ppm	ASTM D5185m		10	7	11
	Fuel	ρριιι	WC Method	>5	<1.0	<1.0	<1.0
	Water		WC Method		NEG	NEG	NEG
	Glycol		WC Method	20.2	NEG	NEG	NEG
	Soot %	%	*ASTM D7844	<u>\</u> 3	0.3	0.4	0.3
	Nitration	Abs/cm	*ASTM D7624	>20	6.8	7.7	7.0
	Sulfation	Abs/.1mm	*ASTM D7024		20.6	19.5	19.5
	Silt	scalar	*Visual	NONE	NONE	NONE	NONE
	Debris	scalar	*Visual	NONE	NONE	NONE	NONE
	Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
	Appearance		*Visual	NORML	NORML	NORML	NORML
	Odor	scalar scalar	*Visual	NORML	NORML	NORML	NORML
	Emulsified Water				NORME	NEG	NEG
		scalar	*Visual	>0.2	NEG	NEG	NEG
FLUID CONDITION	Sodium	ppm	ASTM D5185m	>158	1	<1	1
	Boron	ppm	ASTM D5185m	250	339	5	6
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.	Barium	ppm	ASTM D5185m	10	0	0	0
	Molybdenum	ppm	ASTM D5185m	100	81	61	69
	Manganese	ppm	ASTM D5185m		<1	<1	<1
	Magnesium	ppm	ASTM D5185m	450	520	941	1052
	Calcium	ppm	ASTM D5185m		1276	997	1183
	Phosphorus	ppm	ASTM D5185m		998	944	1159
	Zinc	ppm	ASTM D5185m		1248	1231	1383
	Sulfur	ppm	ASTM D5185m		3591	3152	4523

Oxidation

Visc @ 100°C cSt

Abs/.1mm *ASTM D7414 >25

ASTM D445 14.4

Base Number (BN) mg KOH/g ASTM D2896 8.5

15.1

9.5

12.8

14.6


12.7

10.0

14.9

8.0

13.2

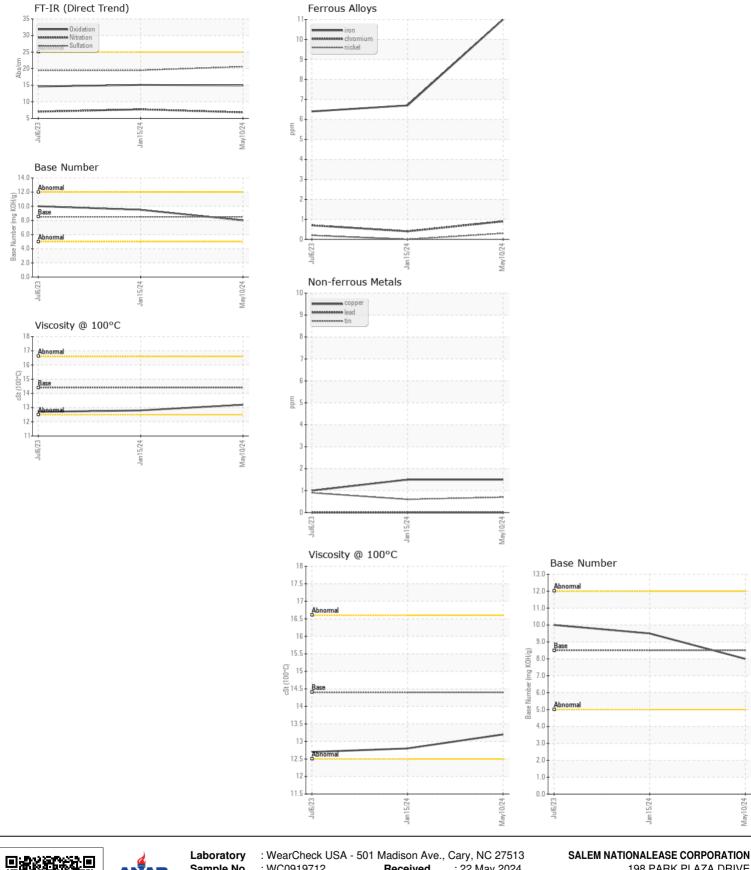

Sample No. : WC0919712 Received 198 PARK PLAZA DRIVE : 22 May 2024 : 24 May 2024 Lab Number : 06188536 Tested WINSTON SALEM, NC Unique Number : 11045288 Diagnosed : 24 May 2024 - Wes Davis US 27105 Test Package : FLEET **Contact: Audrey Hopkins** Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. Audrey.Hopkins@salemcorp.com * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: (336)767-9642 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: x:

Contact/Location: Audrey Hopkins - SALWIN Page 2 of 2