



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**22165**  
Component  
**Diesel Engine**  
Fluid  
**ROTELLA 15W30 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0909733</b>	WC0909711	WC0866860
Sample Date		Client Info		<b>20 May 2024</b>	01 Apr 2024	19 Feb 2024
Machine Age	mls	Client Info		<b>164777</b>	0	149458
Oil Age	mls	Client Info		<b>8000</b>	0	117062
Filter Age	mls	Client Info		<b>8000</b>	0	117062
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>8</b>	10	34
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	1	5
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	2
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	0	<1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>5</b>	4	8
Potassium	ppm	ASTM D5185m	>20	<b>18</b>	8	7
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.2	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.2</b>	8.4	8.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.9</b>	22.3	23.3
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>5</b>	2	3
Boron	ppm	ASTM D5185m		<b>89</b>	152	288
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>23</b>	8	85
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>324</b>	51	426
Calcium	ppm	ASTM D5185m		<b>1765</b>	2108	1489
Phosphorus	ppm	ASTM D5185m		<b>917</b>	1016	1110
Zinc	ppm	ASTM D5185m		<b>1186</b>	1178	1331
Sulfur	ppm	ASTM D5185m		<b>3501</b>	3854	3299
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.1</b>	19.3	18.2
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.0</b>	6.1	5.7
Visc @ 100°C	cSt	ASTM D445		<b>11.5</b>	11.7	13.0

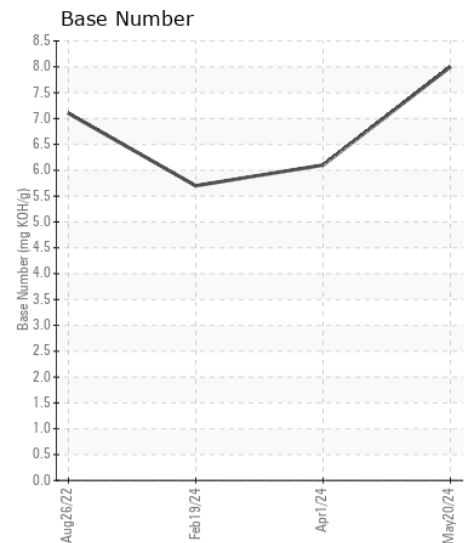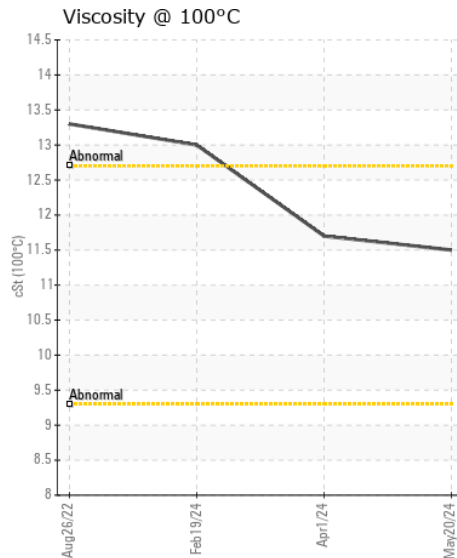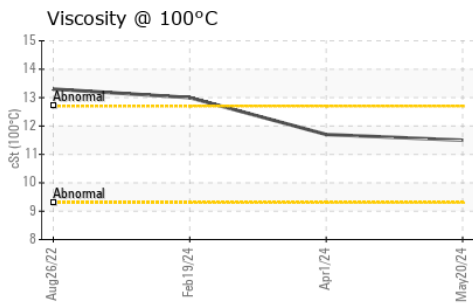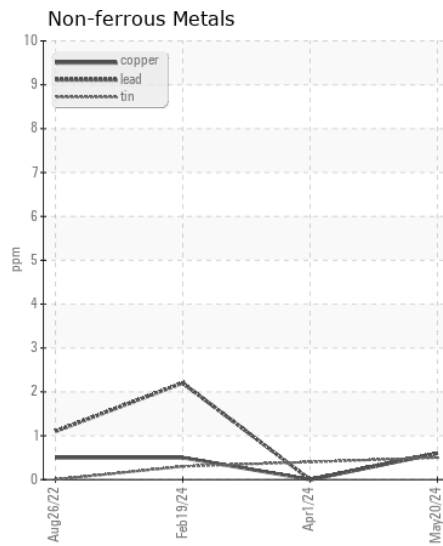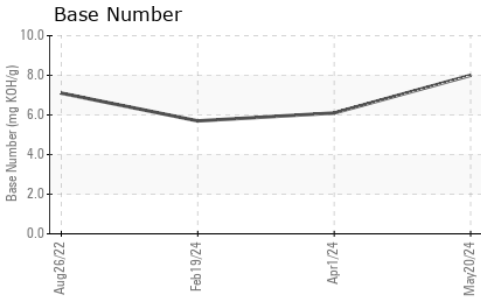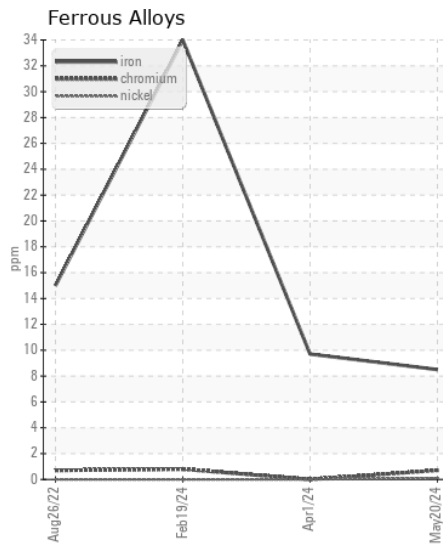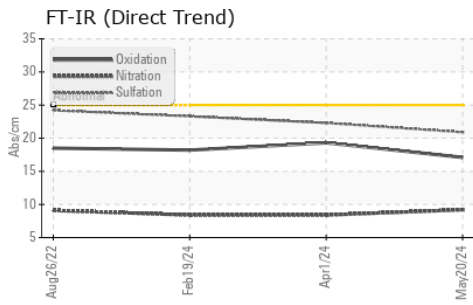

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0909733  
**Lab Number** : 06188695  
**Unique Number** : 11045447  
**Test Package** : FLEET

**Received** : 23 May 2024  
**Tested** : 24 May 2024  
**Diagnosed** : 24 May 2024 - Wes Davis

**GUY M TURNER & TURNER TRANSFER**  
 4505 SOUTH HOLDEN ROAD  
 GREENSBORO, NC  
 US 27406

Contact: ROGER HIXSON  
 rhixson@guyturner.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (336)294-4660  
 F: (336)294-6644