



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
3185
 Component
Diesel Engine
 Fluid
CHEVRON DELO 400 XLE 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0895963	---	---
Sample Date		Client Info		26 Apr 2024	---	---
Machine Age	mls	Client Info		130085	---	---
Oil Age	mls	Client Info		40687	---	---
Filter Age	mls	Client Info		40687	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	26	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>4	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	<1	---	---
Aluminum	ppm	ASTM D5185m	>20	8	---	---
Lead	ppm	ASTM D5185m	>40	<1	---	---
Copper	ppm	ASTM D5185m	>330	22	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	17	---	---
Potassium	ppm	ASTM D5185m	>20	8	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.6	---	---
Nitration	Abs/cm	*ASTM D7624	>20	9.6	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.6	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		14	---	---
Boron	ppm	ASTM D5185m		30	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		4	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		1169	---	---
Calcium	ppm	ASTM D5185m	2900	2042	---	---
Phosphorus	ppm	ASTM D5185m	1100	1073	---	---
Zinc	ppm	ASTM D5185m	1200	1307	---	---
Sulfur	ppm	ASTM D5185m	4000	4667	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.9	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.3	6.4	---	---
Visc @ 100°C	cSt	ASTM D445	11.9	11.9	---	---

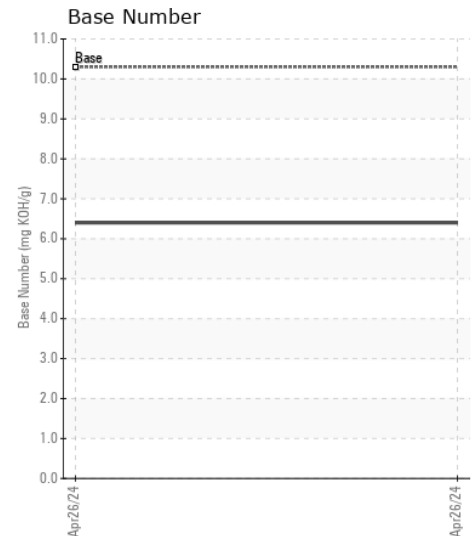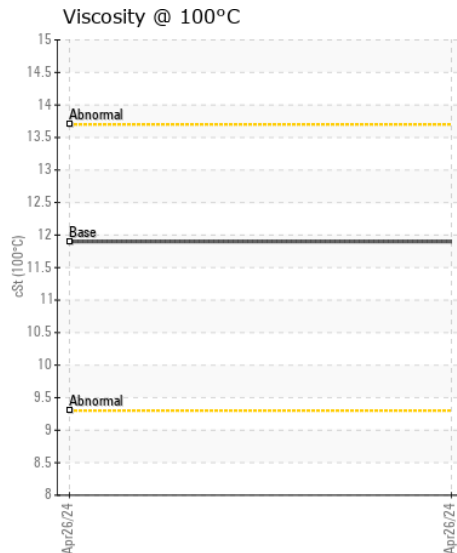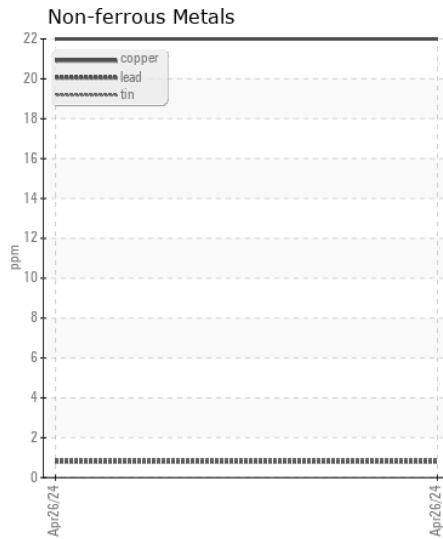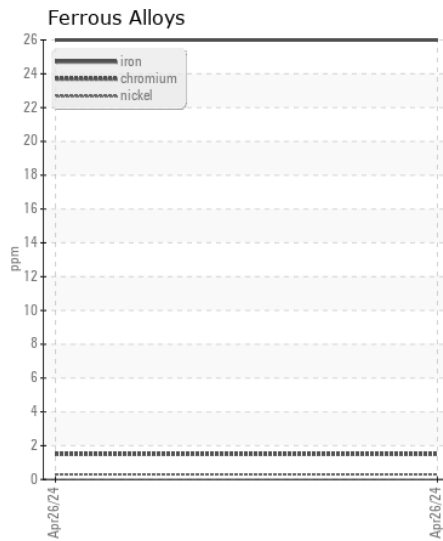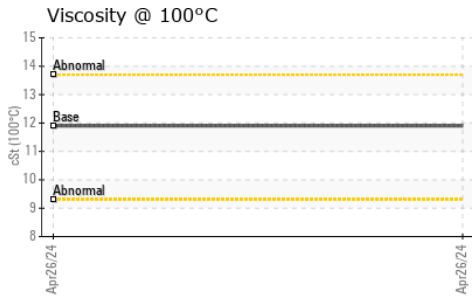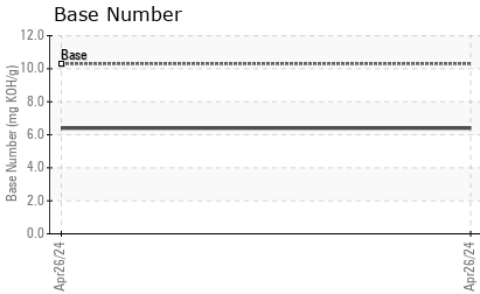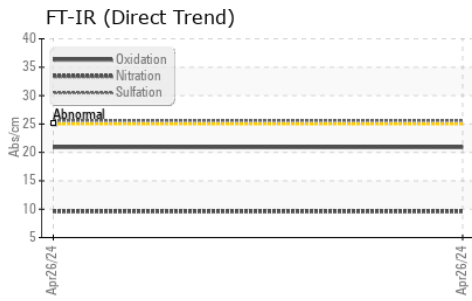

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0895963

Lab Number : 06188715

Unique Number : 11045467

Test Package : FLEET

Received : 23 May 2024

Tested : 24 May 2024

Diagnosed : 28 May 2024 - Sean Felton

LTI/MILKY WAY - MOSES

120 WISER LANE

MOSES LAKE, WA

US 98837

Contact: MIGUEL PEREZ

mperez@lynden.com; dougb@wearcheckusa.com

T: (509)765-5840

F: (509)765-5636

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)