



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Area

(64834P)

Machine Id

3772

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (10 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | GFL0113938 | GFL0093756 | GFL0079031 |
| Sample Date | | Client Info | | 16 May 2024 | 02 Nov 2023 | 09 Aug 2023 |
| Machine Age | hrs | Client Info | | 13907 | 12900 | 12343 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Filter Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | Not Changd | Changed | Changed |
| Filter Changed | | Client Info | | Not Changd | Changed | Changed |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >165 | 14 | 15 | 14 |
| Chromium | ppm | ASTM D5185m | >5 | 2 | 1 | <1 |
| Nickel | ppm | ASTM D5185m | >4 | 0 | <1 | <1 |
| Titanium | ppm | ASTM D5185m | >2 | <1 | <1 | 0 |
| Silver | ppm | ASTM D5185m | >2 | <1 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >20 | 1 | 2 | 3 |
| Lead | ppm | ASTM D5185m | >150 | 2 | 5 | 2 |
| Copper | ppm | ASTM D5185m | >90 | 1 | 2 | 2 |
| Tin | ppm | ASTM D5185m | >5 | <1 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION

There is no indication of any contamination in the oil.


| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >35 | 6 | 10 | 11 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | 2 | 2 |
| Fuel | | WC Method | >3.0 | <1.0 | <1.0 | <1.0 |
| Water | | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | >7.5 | 0.7 | 0.4 | 0.4 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 9.2 | 8.9 | 8.5 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 20.9 | 20.3 | 19.7 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | NEG |

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|-------------|------|------|
| Sodium | ppm | ASTM D5185m | | 3 | 2 | 4 |
| Boron | ppm | ASTM D5185m | 0 | 6 | 3 | 6 |
| Barium | ppm | ASTM D5185m | 0 | 0 | 5 | 0 |
| Molybdenum | ppm | ASTM D5185m | 60 | 56 | 59 | 58 |
| Manganese | ppm | ASTM D5185m | 0 | 0 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | 1010 | 869 | 878 | 911 |
| Calcium | ppm | ASTM D5185m | 1070 | 1067 | 1058 | 1123 |
| Phosphorus | ppm | ASTM D5185m | 1150 | 972 | 1071 | 1024 |
| Zinc | ppm | ASTM D5185m | 1270 | 1216 | 1207 | 1274 |
| Sulfur | ppm | ASTM D5185m | 2060 | 3231 | 3126 | 3595 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 16.7 | 16.6 | 15.1 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 9.8 | 7.1 | 7.2 | 7.7 |
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 13.1 | 12.9 | 12.8 |


FT-IR (Direct Trend)

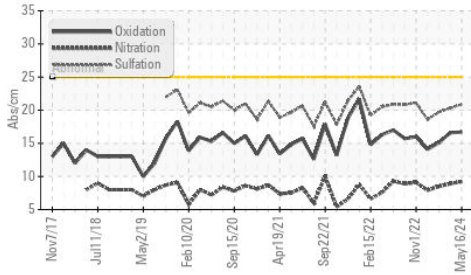


Base Number

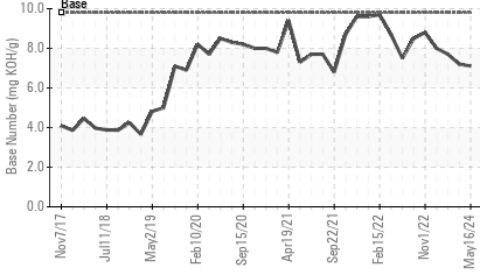


Viscosity @ 100°C

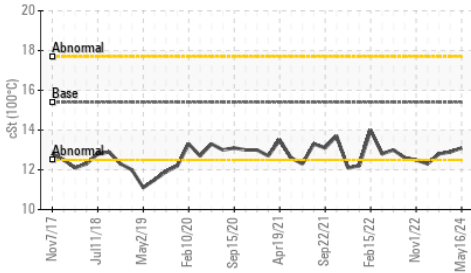


Ferrous Alloys

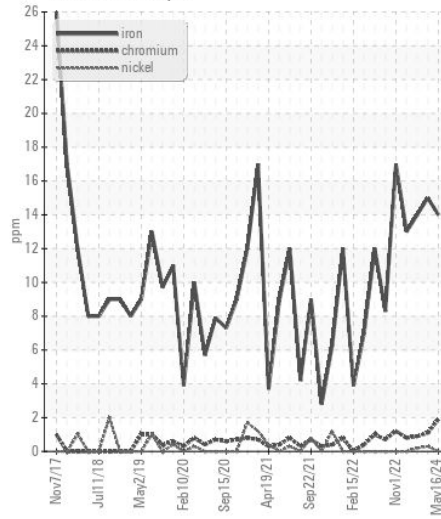


Non-ferrous Metals

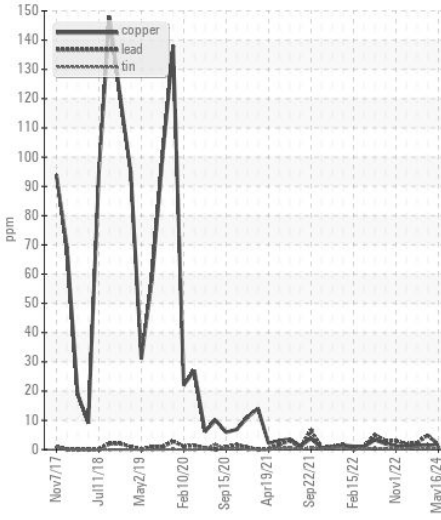

Viscosity @ 100°C

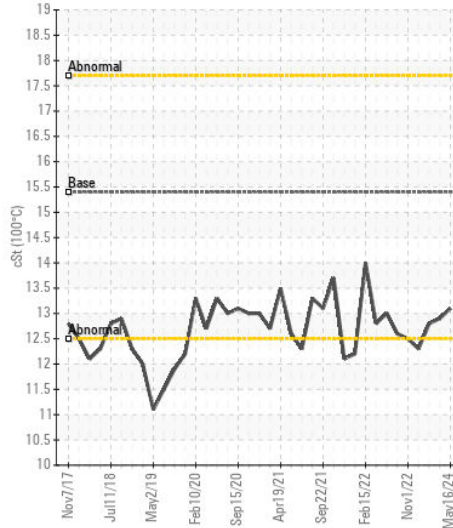

Base Number

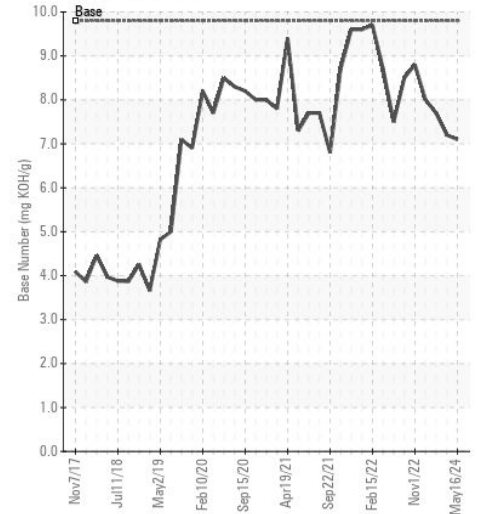

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0113938
Lab Number : 06188719
Unique Number : 11045471
Test Package : FLEET

Received : 23 May 2024
Tested : 24 May 2024
Diagnosed : 24 May 2024 - Wes Davis

GFL Environmental - 029 - Wytheville
 2390 North 4th Street
 Wytheville, VA
 US 24382

Contact: CHARLES CORVIN
 charles.corvin@gflenv.com; canastasio@wearcheckusa.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (276)223-4476
 F: (276)223-1283