



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
NADINE URCIUOLI [SCOTT CAPUT]

Machine Id
VOLVO PENTA 7008573325

Component
Starboard Diesel Engine

Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (8 GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA058312	---	---
Sample Date		Client Info		17 May 2024	---	---
Machine Age	hrs	Client Info		140	---	---
Oil Age	hrs	Client Info		140	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>80	19	---	---
Chromium	ppm	ASTM D5185m	>6	2	---	---
Nickel	ppm	ASTM D5185m	>2	<1	---	---
Titanium	ppm	ASTM D5185m	>2	<1	---	---
Silver	ppm	ASTM D5185m	>2	1	---	---
Aluminum	ppm	ASTM D5185m	>20	5	---	---
Lead	ppm	ASTM D5185m	>95	1	---	---
Copper	ppm	ASTM D5185m	>85	35	---	---
Tin	ppm	ASTM D5185m	>9	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	27	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Fuel	%	ASTM D3524	>4.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0.5	---	---
Nitration	Abs/cm	*ASTM D7624	>20	8.2	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.0	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	---	---
Boron	ppm	ASTM D5185m	2.5	63	---	---
Barium	ppm	ASTM D5185m	0.0	0	---	---
Molybdenum	ppm	ASTM D5185m	0.7	79	---	---
Manganese	ppm	ASTM D5185m	0.0	1	---	---
Magnesium	ppm	ASTM D5185m	256	142	---	---
Calcium	ppm	ASTM D5185m	2057	2141	---	---
Phosphorus	ppm	ASTM D5185m	935	941	---	---
Zinc	ppm	ASTM D5185m	1223	1159	---	---
Sulfur	ppm	ASTM D5185m	4079	3958	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.5	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	10	8.0	---	---
Visc @ 100°C	cSt	ASTM D445	15.0	12.0	---	---

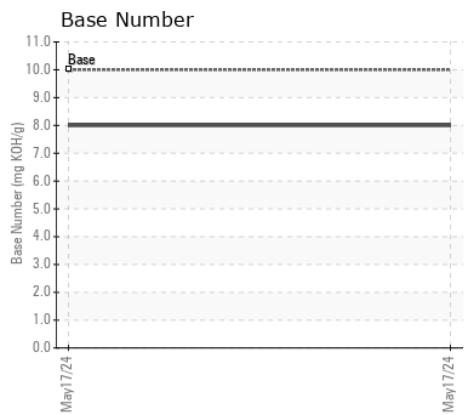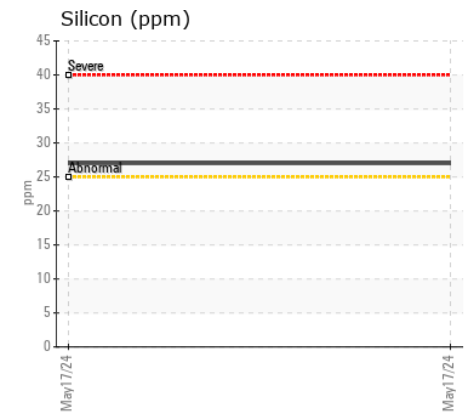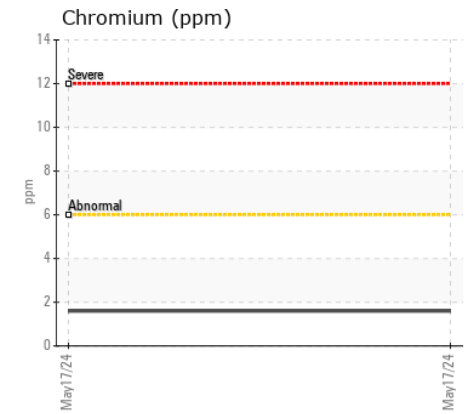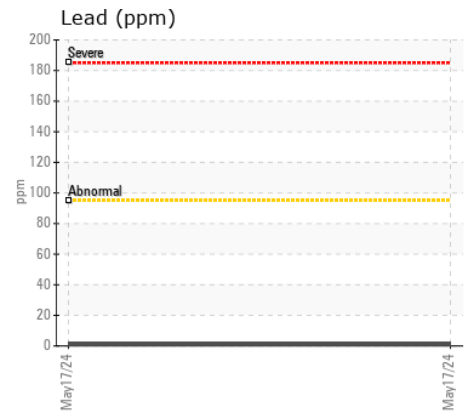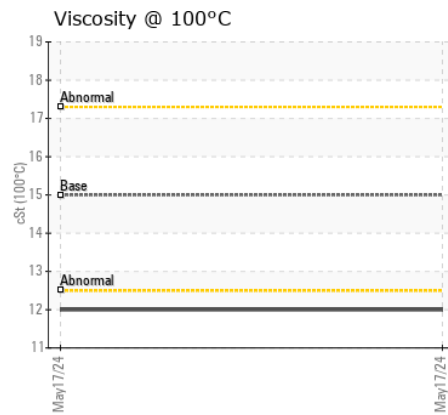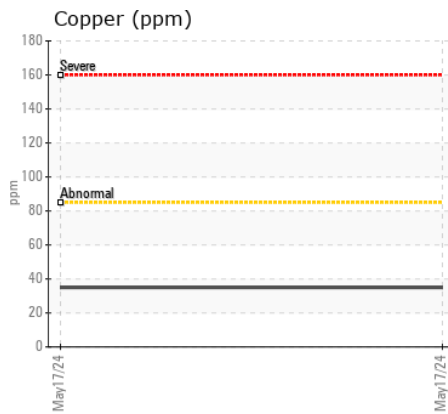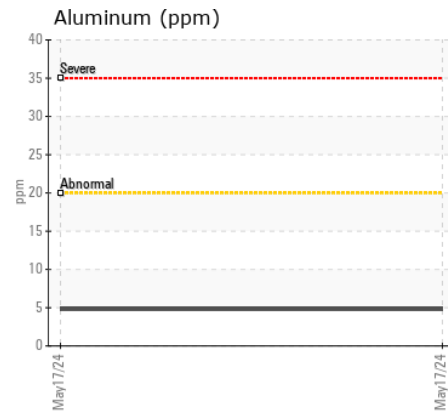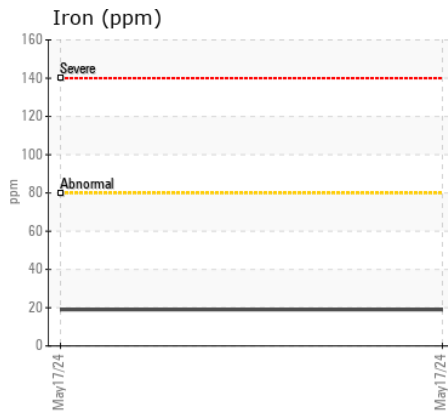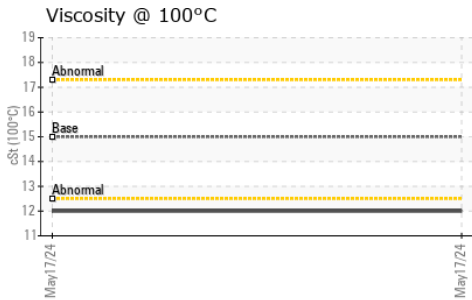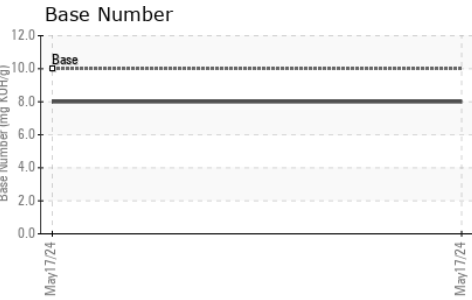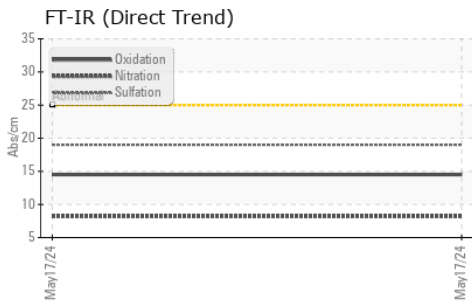

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VPA058312 **Received** : 23 May 2024
Lab Number : 06188738 **Tested** : 24 May 2024
Unique Number : 11045490 **Diagnosed** : 28 May 2024 - Sean Felton
Test Package : MOB 1 (Additional Tests: FuelDilution, TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Helmuts Marine Service
 619 Canal Street
 SAN RAFAEL, CA
 US 94901-3545

Contact: NADINE URCIUOLI
 SERVICE@HELMUTSMARINE.COM

T: x:
 F: x: