



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
61937
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (--- QTS)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL0025745	IL0019249	IL0016005
Sample Date		Client Info		08 Jan 2024	12 Nov 2021	26 Jul 2021
Machine Age	mls	Client Info		0	0	0
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	NORMAL	ABNORMAL

WEAR

Cylinder, crank, or cam shaft wear is indicated. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	▲ 118	26	62
Chromium	ppm	ASTM D5185m	>20	2	<1	1
Nickel	ppm	ASTM D5185m	>4	<1	0	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>3	<1	0	0
Aluminum	ppm	ASTM D5185m	>20	8	18	▲ 42
Lead	ppm	ASTM D5185m	>40	0	<1	<1
Copper	ppm	ASTM D5185m	>330	3	2	12
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	10	5	8
Potassium	ppm	ASTM D5185m	>20	6	39	▲ 67
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.7	0.5	1.3
Nitration	Abs/cm	*ASTM D7624	>20	14.5	10.2	13.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	28.8	22.7	28.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	2	3
Boron	ppm	ASTM D5185m	0	30	57	45
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	56	8	9
Manganese	ppm	ASTM D5185m		1	<1	1
Magnesium	ppm	ASTM D5185m	0	646	697	617
Calcium	ppm	ASTM D5185m		1680	1374	1336
Phosphorus	ppm	ASTM D5185m		783	732	672
Zinc	ppm	ASTM D5185m		944	787	805
Sulfur	ppm	ASTM D5185m		3080	2562	2263
Oxidation	Abs/.1mm	*ASTM D7414	>25	31.4	19.4	26.4
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	4.1	7.5	6.1
Visc @ 100°C	cSt	ASTM D445	14	12.5	13.3	13.7

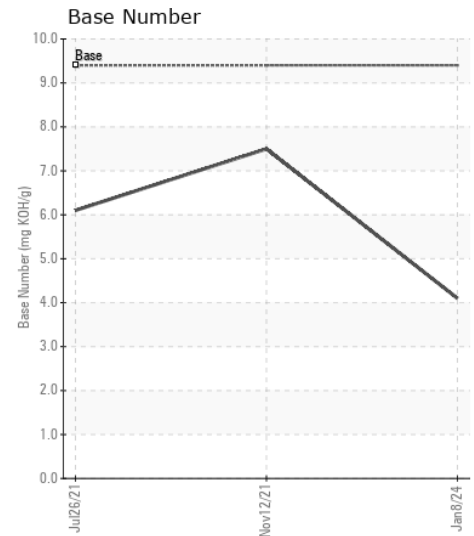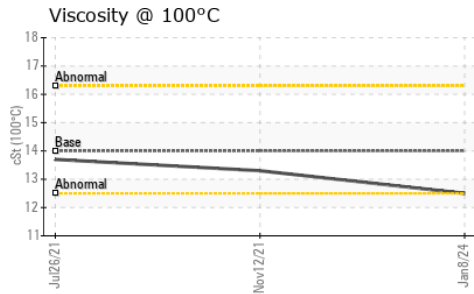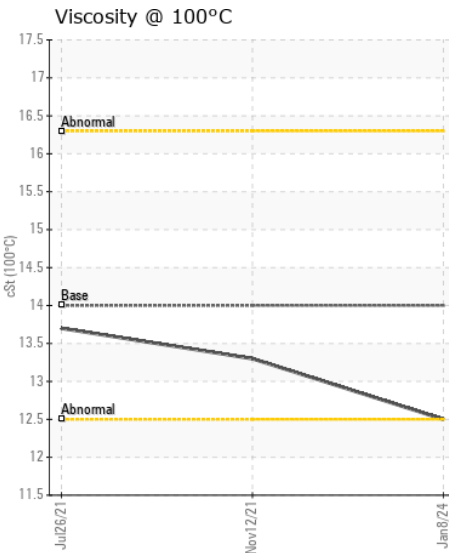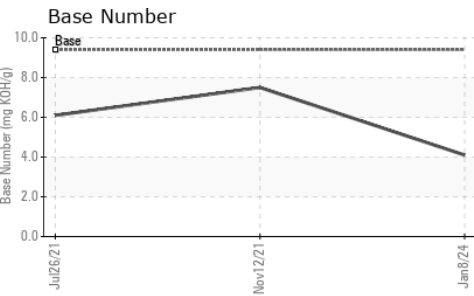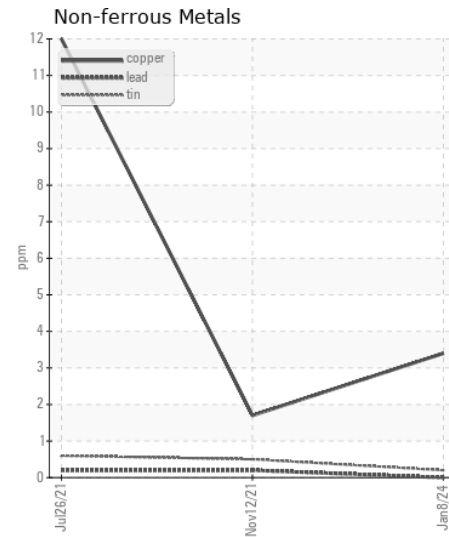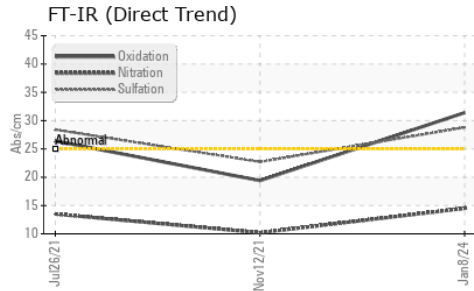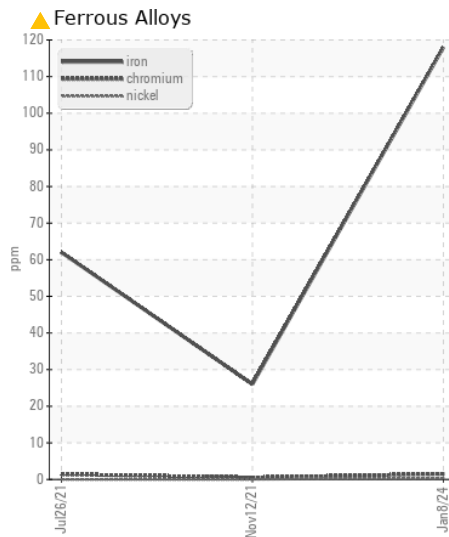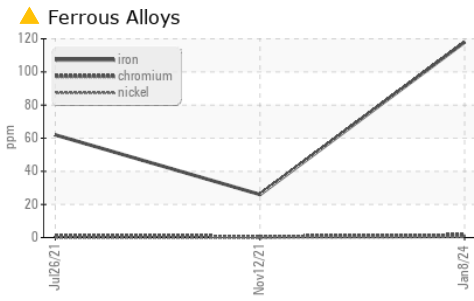

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL0025745
Lab Number : 06188785
Unique Number : 11045537
Test Package : FLEET

Received : 23 May 2024
Tested : 24 May 2024
Diagnosed : 28 May 2024 - Don Baldrige

RUSH TRUCK LEASING - SPRINGFIELD IDEALEASE
 3441 GATLIN DR
 SPRINGFIELD, IL
 US 62707

Contact: TODD CRUMPLER
 crumplerc@rushenterprises.com
 T: (217)718-2341

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: