



LEAHY-WOLF
Lubricating specialists since 1946

OIL ANALYSIS REPORT

| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Area

TA Machines

Machine Id

SANY 155 TA618 (S/N SY013HCA37768)

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|----------|
| Sample Number | | Client Info | | LW0009050 | LW0006618 | --- |
| Sample Date | | Client Info | | 20 May 2024 | 15 Feb 2023 | --- |
| Machine Age | hrs | Client Info | | 913 | 767 | --- |
| Oil Age | hrs | Client Info | | 913 | 767 | --- |
| Filter Age | hrs | Client Info | | 0 | 0 | --- |
| Oil Changed | | Client Info | | Not Changd | Not Changd | --- |
| Filter Changed | | Client Info | | N/A | N/A | --- |
| Sample Status | | | | NORMAL | NORMAL | --- |

WEAR

Metal levels are typical for a new component breaking in.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|-----|
| Iron | ppm | ASTM D5185m | >100 | 6 | 7 | --- |
| Chromium | ppm | ASTM D5185m | >20 | 0 | <1 | --- |
| Nickel | ppm | ASTM D5185m | >4 | 0 | <1 | --- |
| Titanium | ppm | ASTM D5185m | | 0 | <1 | --- |
| Silver | ppm | ASTM D5185m | >3 | <1 | <1 | --- |
| Aluminum | ppm | ASTM D5185m | >20 | 3 | 4 | --- |
| Lead | ppm | ASTM D5185m | >40 | 0 | 0 | --- |
| Copper | ppm | ASTM D5185m | >330 | 3 | 4 | --- |
| Tin | ppm | ASTM D5185m | >15 | <1 | <1 | --- |
| Vanadium | ppm | ASTM D5185m | | <1 | <1 | --- |
| White Metal | scalar | *Visual | NONE | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | --- |

CONTAMINATION












There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-----|
| Silicon | ppm | ASTM D5185m | >25 | 4 | 8 | --- |
| Potassium | ppm | ASTM D5185m | >20 | 0 | 3 | --- |
| Fuel | | WC Method | >5 | <1.0 | 1.3 | --- |
| Water | | WC Method | >0.2 | NEG | NEG | --- |
| Glycol | | WC Method | | NEG | NEG | --- |
| Soot % | % | *ASTM D7844 | >3 | 0.1 | 0.1 | --- |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 5.7 | 6.9 | --- |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 17.7 | 18.7 | --- |
| Silt | scalar | *Visual | NONE | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | --- |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|--------------|------|-----|
| Sodium | ppm | ASTM D5185m | >216 | 2 | 3 | --- |
| Boron | ppm | ASTM D5185m | 250 | 41 | 67 | --- |
| Barium | ppm | ASTM D5185m | 10 | 0 | 0 | --- |
| Molybdenum | ppm | ASTM D5185m | 100 | 38 | 16 | --- |
| Manganese | ppm | ASTM D5185m | | <1 | <1 | --- |
| Magnesium | ppm | ASTM D5185m | 450 | 885 | 636 | --- |
| Calcium | ppm | ASTM D5185m | 3000 | 1428 | 1462 | --- |
| Phosphorus | ppm | ASTM D5185m | 1150 | 1136 | 1046 | --- |
| Zinc | ppm | ASTM D5185m | 1350 | 1297 | 1222 | --- |
| Sulfur | ppm | ASTM D5185m | 4250 | 4051 | 3535 | --- |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 13.3 | 12.8 | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 8.5 | 9.1 | 9.3 | --- |
| Visc @ 100°C | cSt | ASTM D445 | 14.4 | 12.9 | 12.3 | --- |

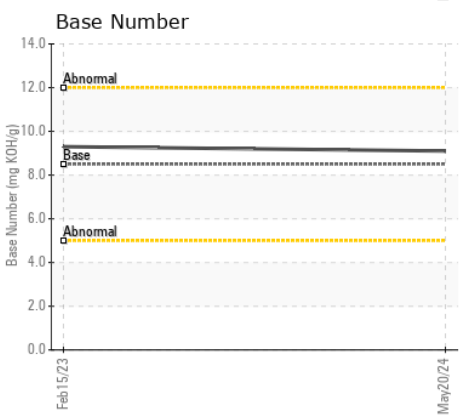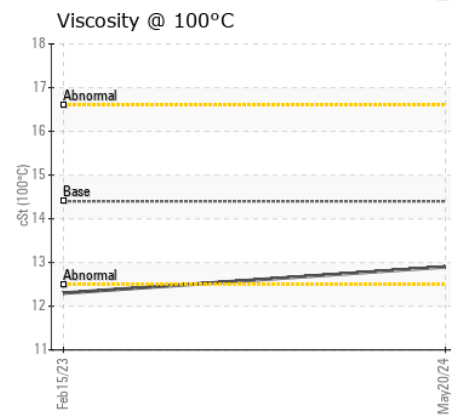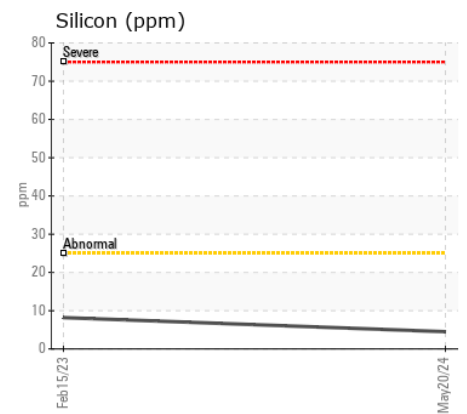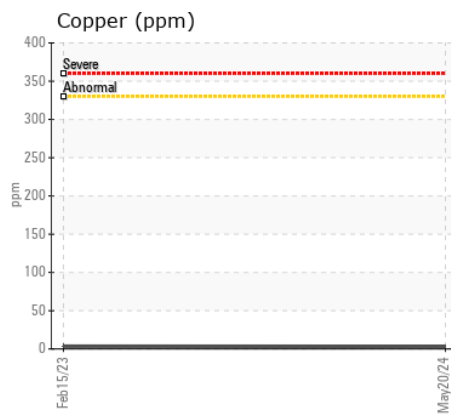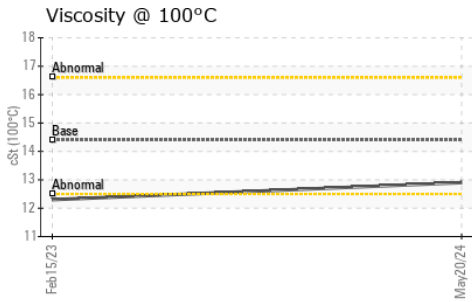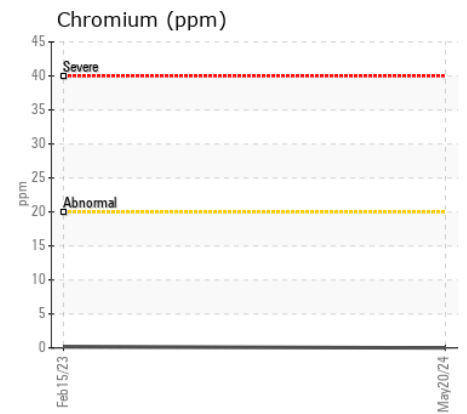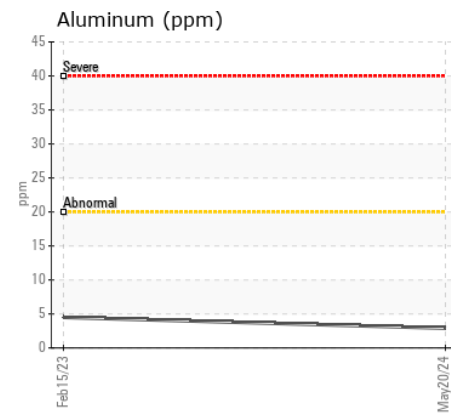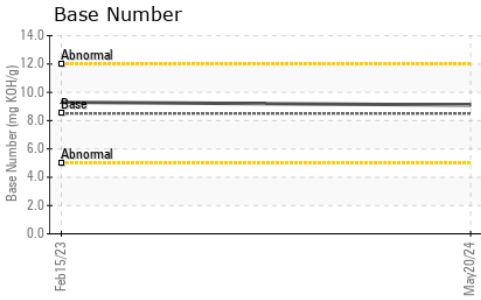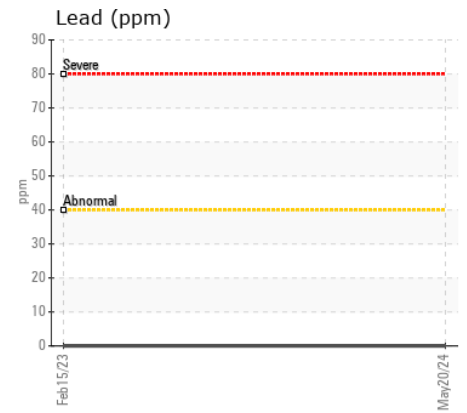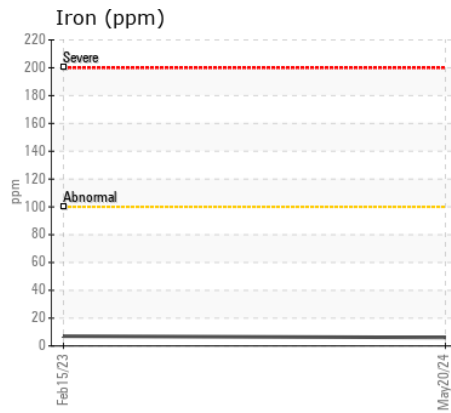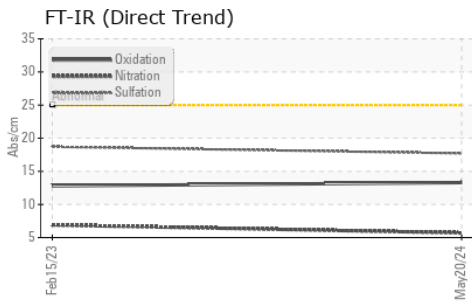

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LW0009050 **Received** : 23 May 2024
Lab Number : 06188805 **Tested** : 24 May 2024
Unique Number : 11045557 **Diagnosed** : 24 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

CHICAGO MACHINERY INC
 3142 EAST LINCOLN
 LYNWOOD, IL
 US 60411-7728
 Contact: Mike Korbolik
 mike@chicagomachineryinc.com
 T: (708)758-2060
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)