



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
MACK GRANITE 207
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0074602	---	---
Sample Date		Client Info		27 Mar 2024	---	---
Machine Age	mls	Client Info		124262	---	---
Oil Age	mls	Client Info		10000	---	---
Filter Age	mls	Client Info		10000	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	12	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m	>2	84	---	---
Silver	ppm	ASTM D5185m	>2	<1	---	---
Aluminum	ppm	ASTM D5185m	>20	3	---	---
Lead	ppm	ASTM D5185m	>40	<1	---	---
Copper	ppm	ASTM D5185m	>330	1	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION












Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	5	---	---
Potassium	ppm	ASTM D5185m	>20	10	---	---
Fuel		WC Method	>3.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>4	0.3	---	---
Nitration	Abs/cm	*ASTM D7624	>20	9.4	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.8	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	6	---	---
Boron	ppm	ASTM D5185m	250	56	---	---
Barium	ppm	ASTM D5185m	10	0	---	---
Molybdenum	ppm	ASTM D5185m	100	5	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	450	504	---	---
Calcium	ppm	ASTM D5185m	3000	1923	---	---
Phosphorus	ppm	ASTM D5185m	1150	1026	---	---
Zinc	ppm	ASTM D5185m	1350	1307	---	---
Sulfur	ppm	ASTM D5185m	4250	4272	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.9	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.3	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.7	---	---

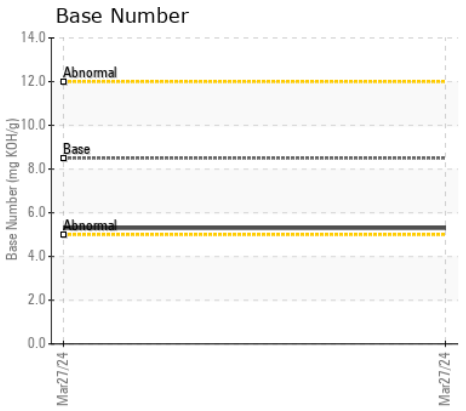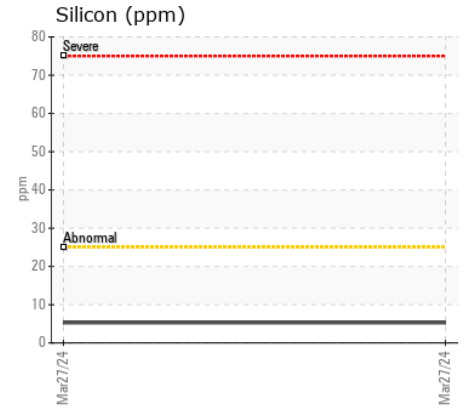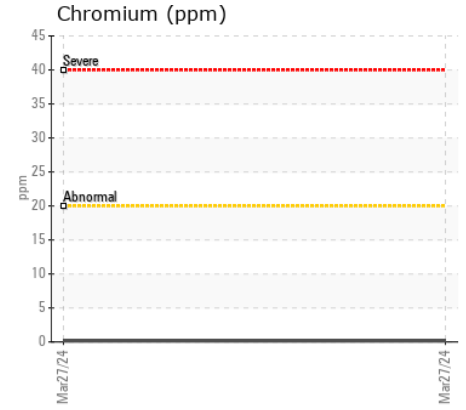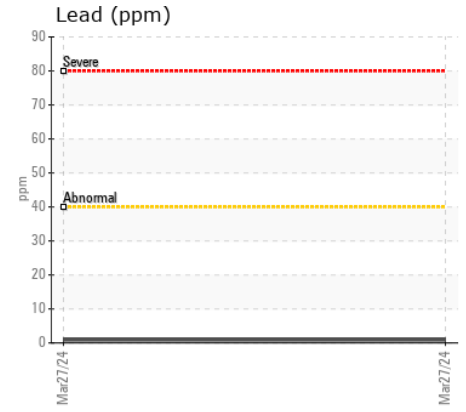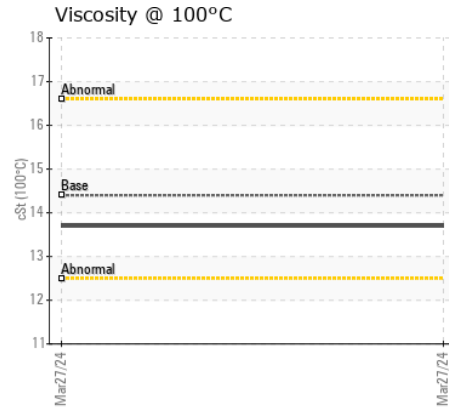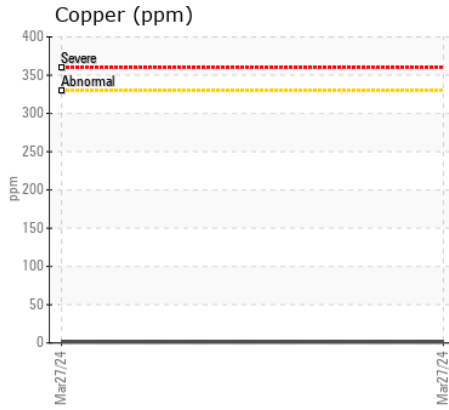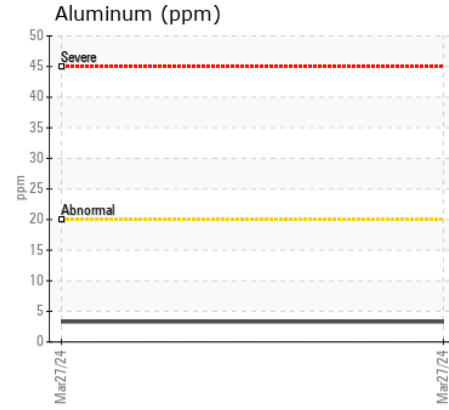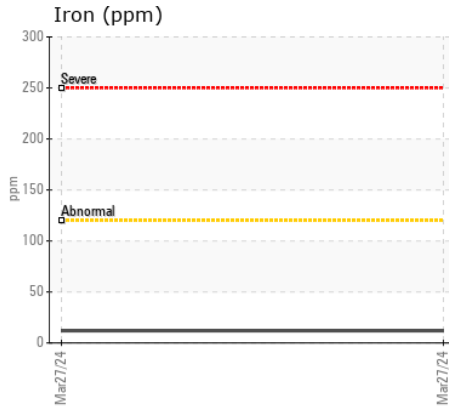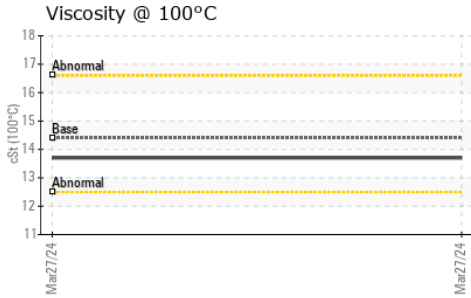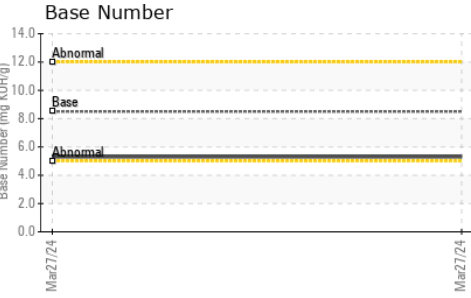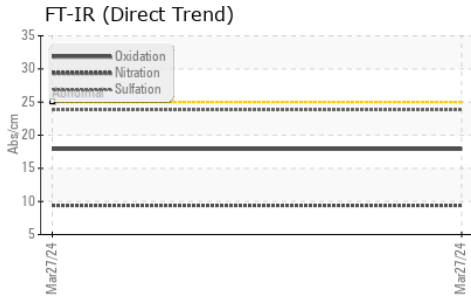

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0074602 **Received** : 23 May 2024
Lab Number : 06188867 **Tested** : 24 May 2024
Unique Number : 11045619 **Diagnosed** : 24 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

TRI-STATE DISPOSAL
 14050 WOOD ST
 DIXMOOR, IL
 US 60426
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: