



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Machine Id
813653
 Component
Diesel Engine
 Fluid
MOBIL DELVAC EXTREME 15W40 (44 QTS)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0008111	---	---
Sample Date		Client Info		10 May 2024	---	---
Machine Age	hrs	Client Info		630	---	---
Oil Age	hrs	Client Info		630	---	---
Filter Age	hrs	Client Info		630	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				ATTENTION	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	44	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	1	---	---
Aluminum	ppm	ASTM D5185m	>20	29	---	---
Lead	ppm	ASTM D5185m	>40	1	---	---
Copper	ppm	ASTM D5185m	>330	13	---	---
Tin	ppm	ASTM D5185m	>15	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










Fuel content negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	12	---	---
Potassium	ppm	ASTM D5185m	>20	93	---	---
Fuel	%	ASTM D3524	>5	0.2	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.2	---	---
Nitration	Abs/cm	*ASTM D7624	>20	10.4	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.0	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m		35	---	---
Barium	ppm	ASTM D5185m		2	---	---
Molybdenum	ppm	ASTM D5185m		16	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		791	---	---
Calcium	ppm	ASTM D5185m		1624	---	---
Phosphorus	ppm	ASTM D5185m		807	---	---
Zinc	ppm	ASTM D5185m		929	---	---
Sulfur	ppm	ASTM D5185m		3758	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.6	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.3	5.90	---	---
Visc @ 100°C	cSt	ASTM D445	14.3	11.9	---	---

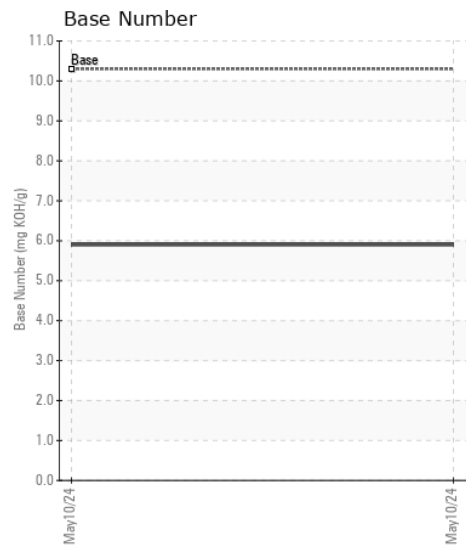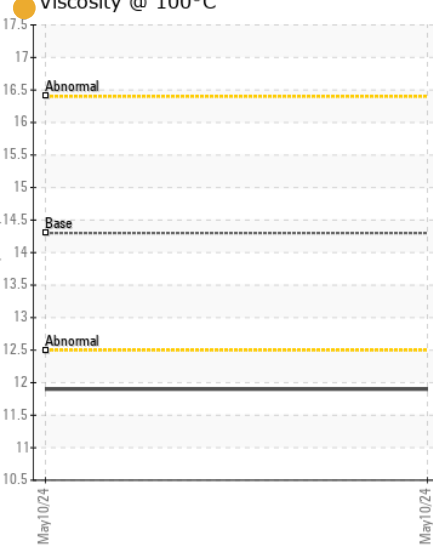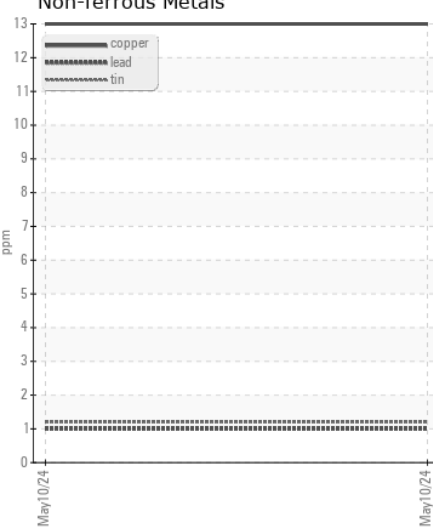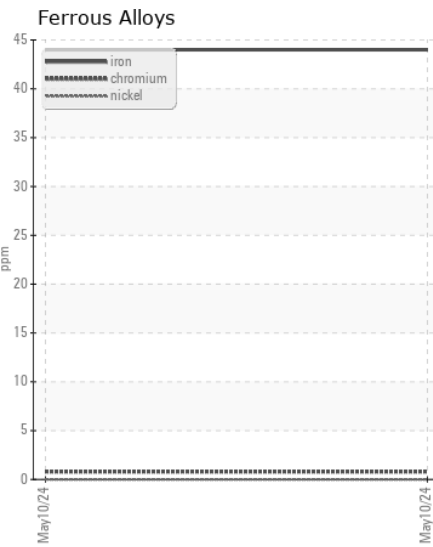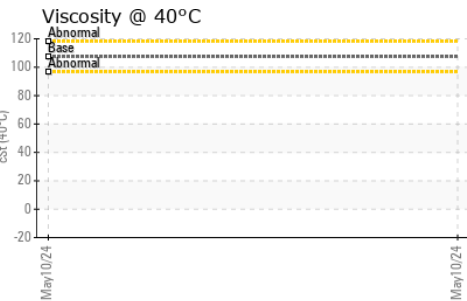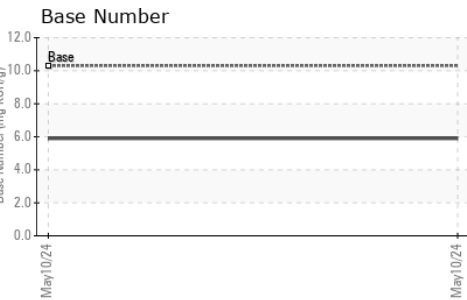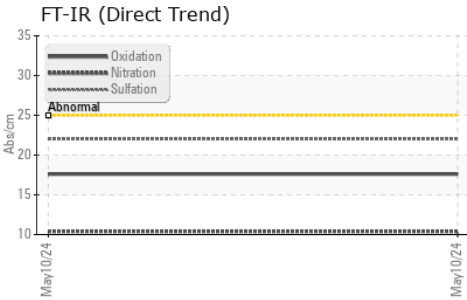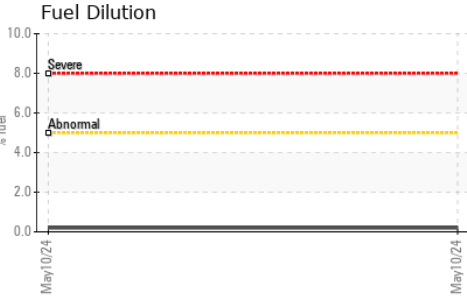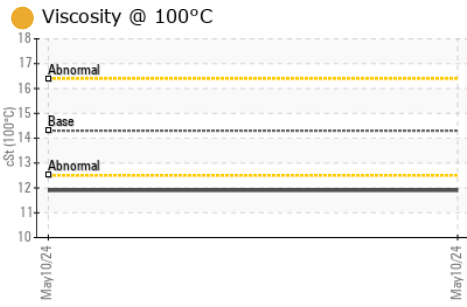

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0008111 **Received** : 23 May 2024
Lab Number : 06188876 **Tested** : 29 May 2024
Unique Number : 11045628 **Diagnosed** : 29 May 2024 - Jonathan Hester
Test Package : FLEET (Additional Tests: FuelDilution, KV40, PercentFuel)

RTL PACLEASE - 7017 - Oklahoma City
 8700 West I-40
 Oklahoma City, OK
 US 73128
 Contact: TECHNICIAN ACCOUNT
 catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: