



Machine Id  
**412004**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0113058</b>	GFL0113031	GFL0059619
Sample Date		Client Info		<b>20 May 2024</b>	22 Feb 2024	14 Aug 2023
Machine Age	hrs	Client Info		<b>5636</b>	4537	0
Oil Age	hrs	Client Info		<b>601</b>	0	0
Filter Age	hrs	Client Info		<b>601</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	N/A	N/A
Filter Changed		Client Info		<b>Changed</b>	N/A	N/A
Sample Status				<b>SEVERE</b>	NORMAL	ABNORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	<b>15</b>	20	101
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	3
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	3	8
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	2	5
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	3
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	4	15
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	3
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

Fuel content negligible. There is an abnormal amount of solids and carbon present in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>4</b>	4	8
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	3	15
Fuel	%	ASTM D3524	>3.0	<b>0.5</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>4	<b>▲ 6.4</b>	0.6	1.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>18.4</b>	10.2	15.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>34.3</b>	21.6	28.2
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN level is low.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	5	7
Boron	ppm	ASTM D5185m	0	<b>6</b>	14	8
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>66</b>	58	70
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	2
Magnesium	ppm	ASTM D5185m	1010	<b>972</b>	658	995
Calcium	ppm	ASTM D5185m	1070	<b>1104</b>	1436	1291
Phosphorus	ppm	ASTM D5185m	1150	<b>1012</b>	734	959
Zinc	ppm	ASTM D5185m	1270	<b>1251</b>	934	1286
Sulfur	ppm	ASTM D5185m	2060	<b>2982</b>	2179	2650
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>24.9</b>	19.7	31.2
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>▲ 0.0</b>	6.8	▲ 3.9
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.5</b>	13.9	14.4


▲ FT-IR (Direct Trend)

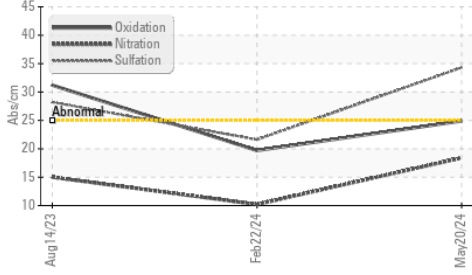


Ferrous Alloys

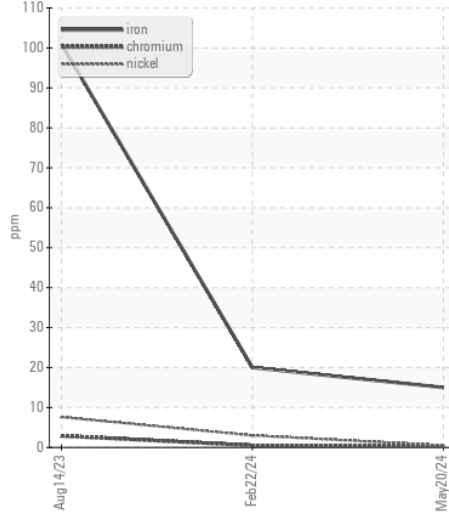


▲ Soot %

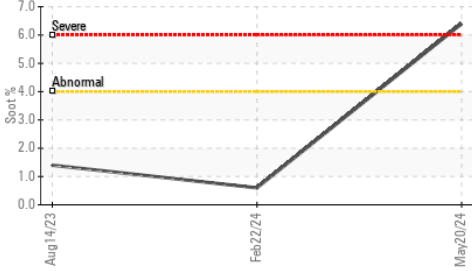


Non-ferrous Metals

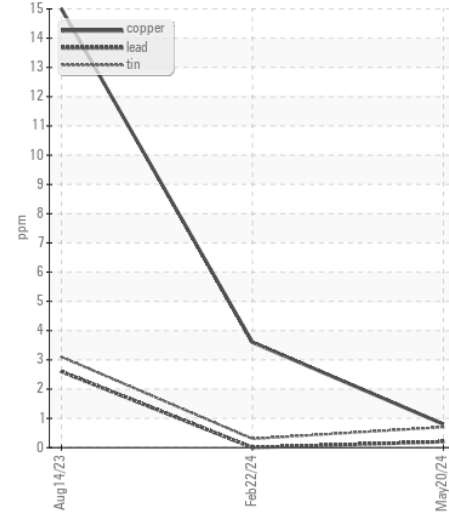


▲ Base Number

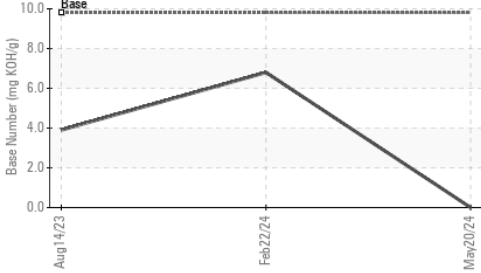


Fuel Dilution

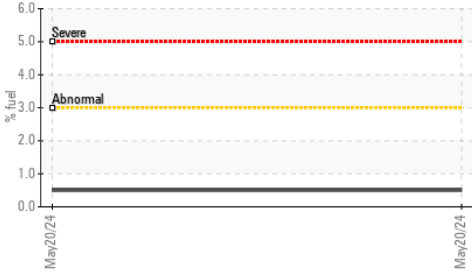


Viscosity @ 100°C

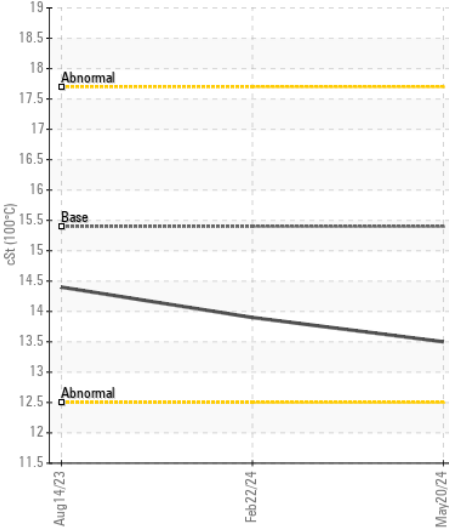

Viscosity @ 100°C

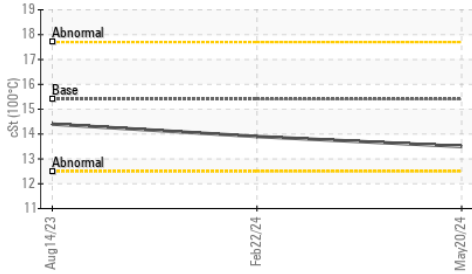

▲ Base Number

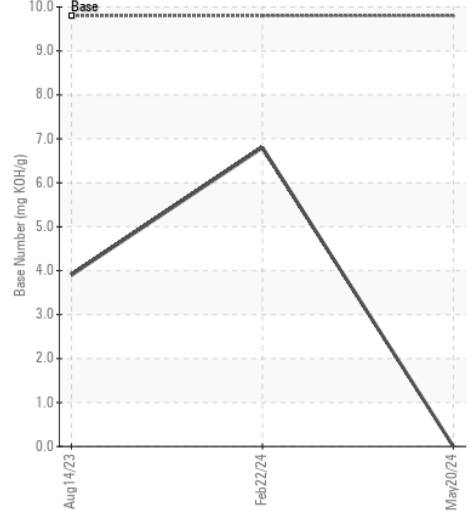

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0113058

Lab Number : 06188940

Unique Number : 11045692

Test Package : FLEET ( Additional Tests: FuelDilution, PercentFuel )

Received : 23 May 2024

Tested : 29 May 2024

Diagnosed : 29 May 2024 - Jonathan Hester

GFL Environmental - 924 - Madison HC

300 Raemisch Road

Wauwaukee, WI

US 53597

Contact: Ben Briggs

ben.briggs@gflenv.com

T: (608)770-9196

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)