



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
WIRTGEN W207FI 21200669
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0212334	---	---
Sample Date		Client Info		21 May 2024	---	---
Machine Age	hrs	Client Info		125	---	---
Oil Age	hrs	Client Info		125	---	---
Filter Age	hrs	Client Info		125	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	16	---	---
Chromium	ppm	ASTM D5185m	>20	0	---	---
Nickel	ppm	ASTM D5185m	>4	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	<1	---	---
Aluminum	ppm	ASTM D5185m	>20	6	---	---
Lead	ppm	ASTM D5185m	>40	3	---	---
Copper	ppm	ASTM D5185m	>330	15	---	---
Tin	ppm	ASTM D5185m	>15	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	31	---	---
Potassium	ppm	ASTM D5185m	>20	33	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol	%	*ASTM D2982		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.2	---	---
Nitration	Abs/cm	*ASTM D7624	>20	8.0	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.1	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>158	12	---	---
Boron	ppm	ASTM D5185m	250	75	---	---
Barium	ppm	ASTM D5185m	10	1	---	---
Molybdenum	ppm	ASTM D5185m	100	85	---	---
Manganese	ppm	ASTM D5185m		4	---	---
Magnesium	ppm	ASTM D5185m	450	100	---	---
Calcium	ppm	ASTM D5185m	3000	2166	---	---
Phosphorus	ppm	ASTM D5185m	1150	989	---	---
Zinc	ppm	ASTM D5185m	1350	1198	---	---
Sulfur	ppm	ASTM D5185m	4250	4634	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.7	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.5	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.6	---	---

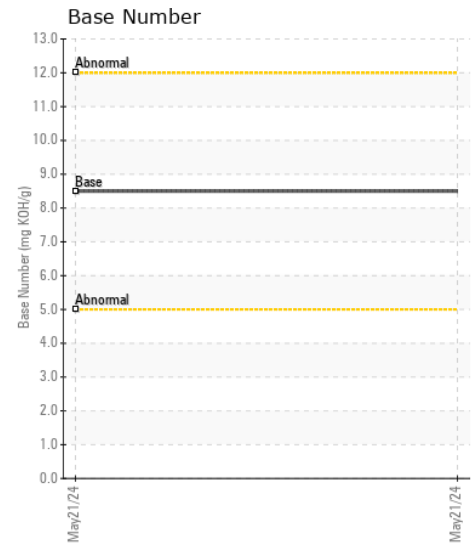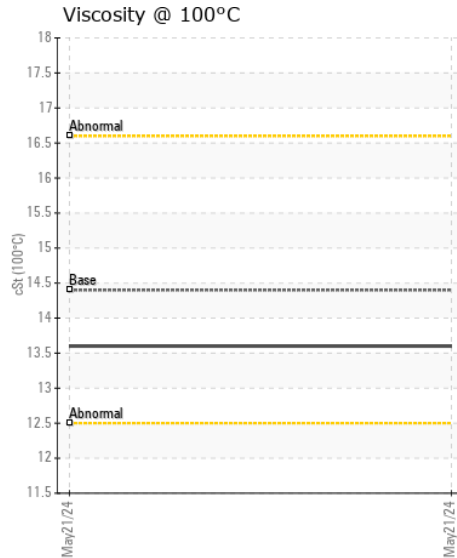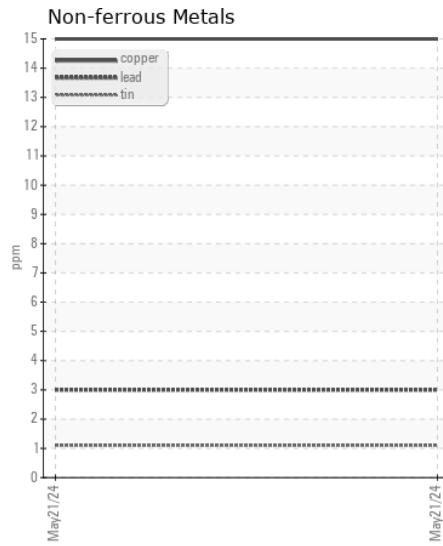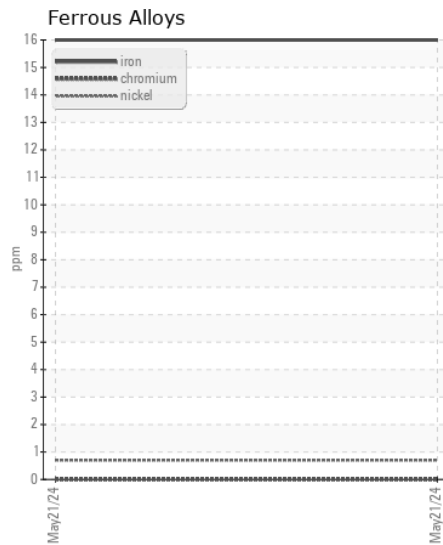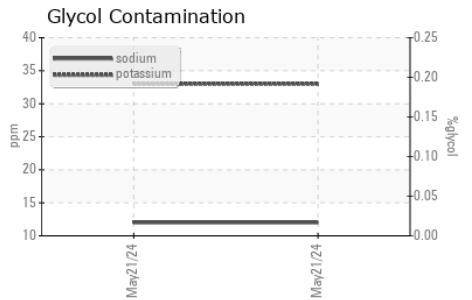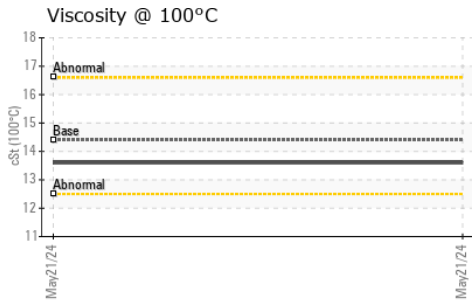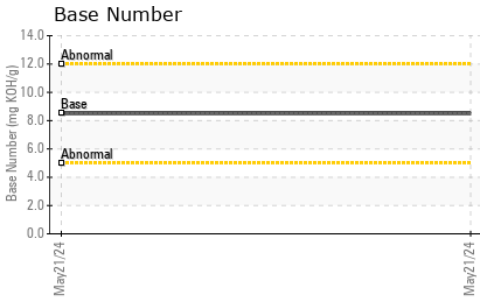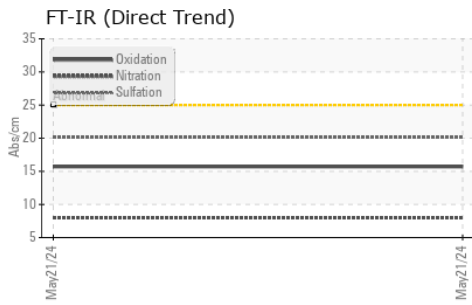

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0212334 **Received** : 23 May 2024
Lab Number : 06188967 **Tested** : 28 May 2024
Unique Number : 11045719 **Diagnosed** : 28 May 2024 - Don Baldrige
Test Package : CONST (Additional Tests: Glycol, TBN)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)