



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
1858
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 5W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0905765	WC0870818	---
Sample Date		Client Info		21 Mar 2024	14 Dec 2023	---
Machine Age	mls	Client Info		10361	4413	---
Oil Age	mls	Client Info		0	0	---
Filter Age	mls	Client Info		0	0	---
Oil Changed		Client Info		Not Chngd	Not Chngd	---
Filter Changed		Client Info		Not Chngd	Not Chngd	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	14	31	---
Chromium	ppm	ASTM D5185m	>20	1	1	---
Nickel	ppm	ASTM D5185m	>4	<1	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m	>3	<1	0	---
Aluminum	ppm	ASTM D5185m	>20	5	13	---
Lead	ppm	ASTM D5185m	>40	<1	<1	---
Copper	ppm	ASTM D5185m	>330	1	19	---
Tin	ppm	ASTM D5185m	>15	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	5	31	---
Potassium	ppm	ASTM D5185m	>20	4	35	---
Fuel		WC Method	>5	<1.0	▲ 2.8	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.7	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	11.3	9.4	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.5	20.1	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>44	2	7	---
Boron	ppm	ASTM D5185m	250	17	42	---
Barium	ppm	ASTM D5185m	10	0	10	---
Molybdenum	ppm	ASTM D5185m	100	79	47	---
Manganese	ppm	ASTM D5185m		0	5	---
Magnesium	ppm	ASTM D5185m	450	114	714	---
Calcium	ppm	ASTM D5185m	3000	1912	1117	---
Phosphorus	ppm	ASTM D5185m	1150	942	751	---
Zinc	ppm	ASTM D5185m	1350	1142	856	---
Sulfur	ppm	ASTM D5185m	4250	3555	2374	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.7	18.6	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.4	8.2	---
Visc @ 100°C	cSt	ASTM D445	14.4	12.5	▲ 11.1	---

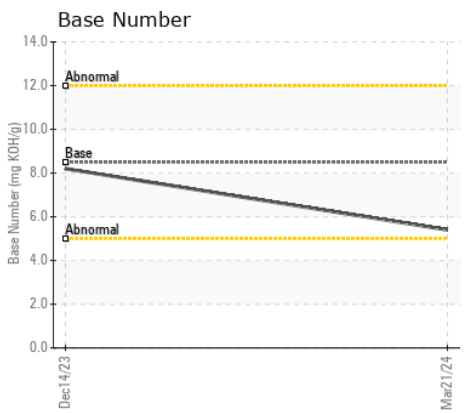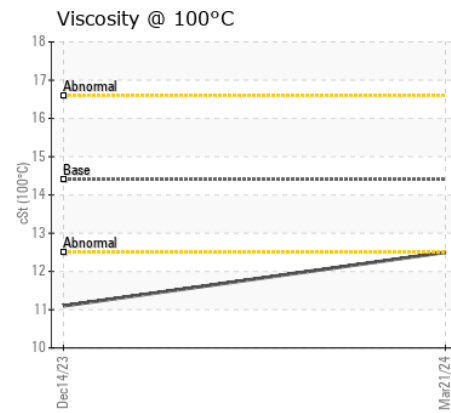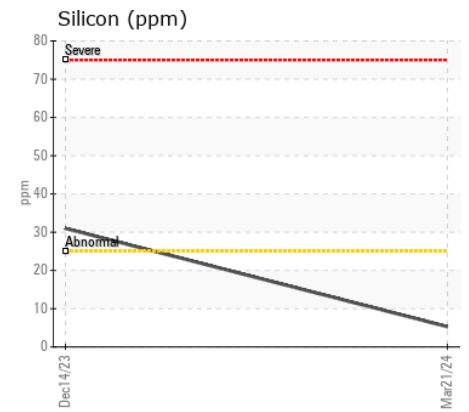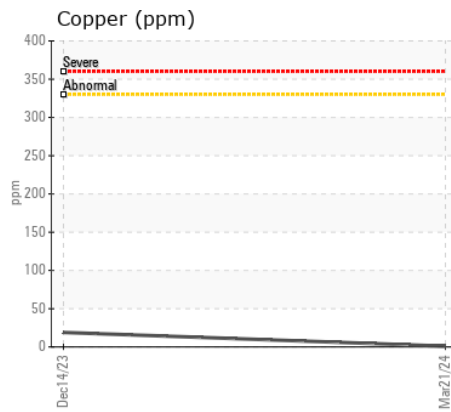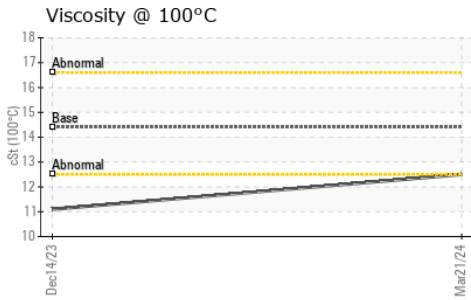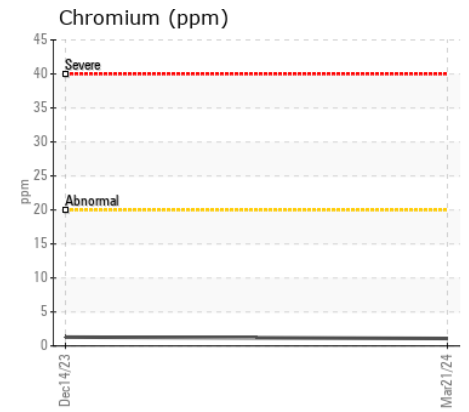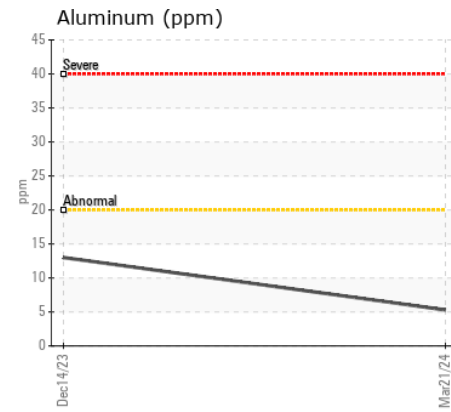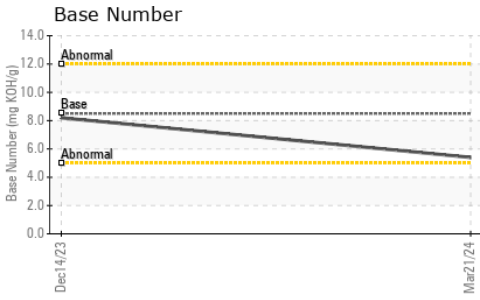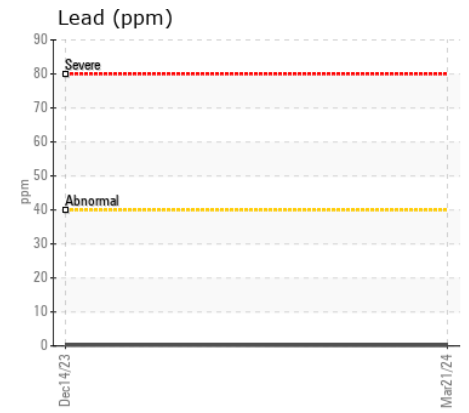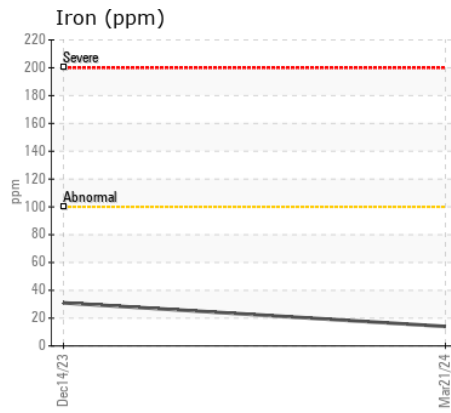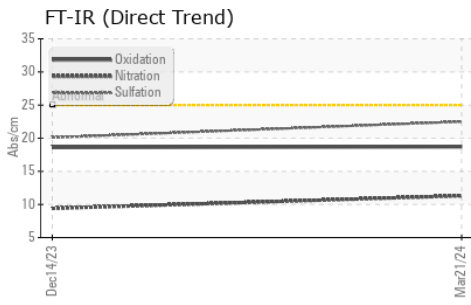

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0905765 **Received** : 23 May 2024
Lab Number : 06189006 **Tested** : 24 May 2024
Unique Number : 11045758 **Diagnosed** : 24 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

WAKE COUNTY PUBLIC SCHOOL SYSTEM
 1551 ROCK QUARRY ROAD
 RALEIGH, NC
 US 27610
 Contact: DEVIN WEBER
 dweber@wcpss.net
 T: (919)856-8076
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)