



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
THOMAS 1838
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0905760	WC0870682	---
Sample Date		Client Info		18 Mar 2024	29 Nov 2023	---
Machine Age	mls	Client Info		19367	9546	---
Oil Age	mls	Client Info		0	0	---
Filter Age	mls	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>90	12	12	---
Chromium	ppm	ASTM D5185m	>20	1	<1	---
Nickel	ppm	ASTM D5185m	>2	<1	<1	---
Titanium	ppm	ASTM D5185m	>2	<1	0	---
Silver	ppm	ASTM D5185m	>2	<1	0	---
Aluminum	ppm	ASTM D5185m	>20	15	12	---
Lead	ppm	ASTM D5185m	>40	<1	0	---
Copper	ppm	ASTM D5185m	>330	2	4	---
Tin	ppm	ASTM D5185m	>15	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	7	8	---
Potassium	ppm	ASTM D5185m	>20	31	31	---
Fuel		WC Method	>3.0	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>6	0.2	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	8.9	8.4	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.9	17.7	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	2	3	---
Boron	ppm	ASTM D5185m	250	48	49	---
Barium	ppm	ASTM D5185m	10	0	4	---
Molybdenum	ppm	ASTM D5185m	100	84	78	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	450	108	142	---
Calcium	ppm	ASTM D5185m	3000	1960	1818	---
Phosphorus	ppm	ASTM D5185m	1150	975	937	---
Zinc	ppm	ASTM D5185m	1350	1180	1095	---
Sulfur	ppm	ASTM D5185m	4250	3685	3597	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.5	13.9	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.7	7.2	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.0	12.7	---

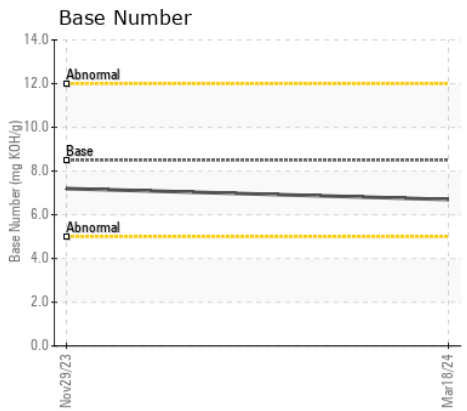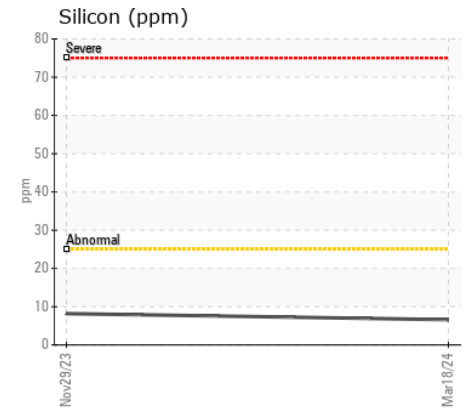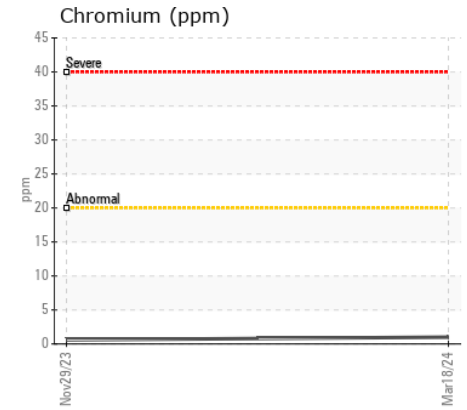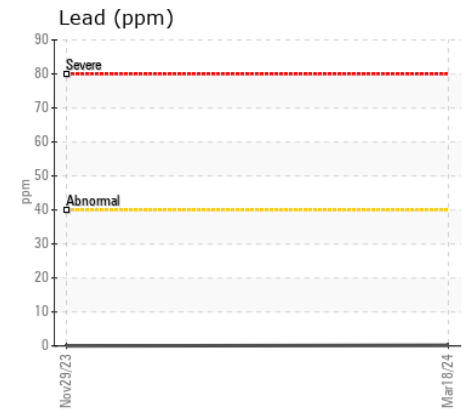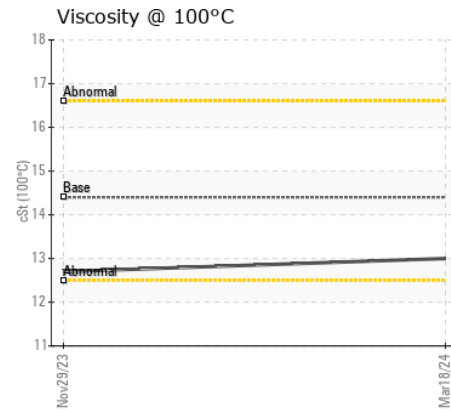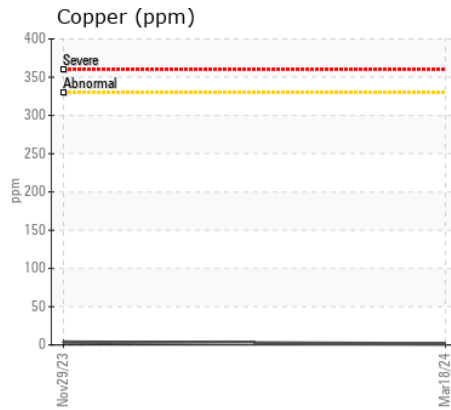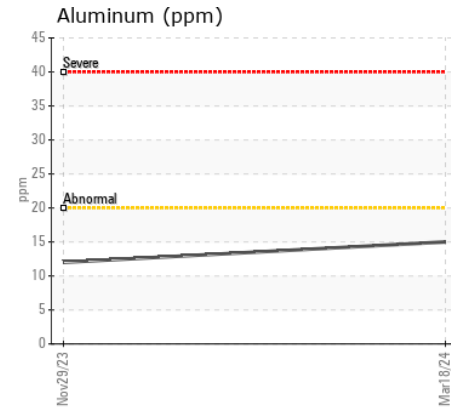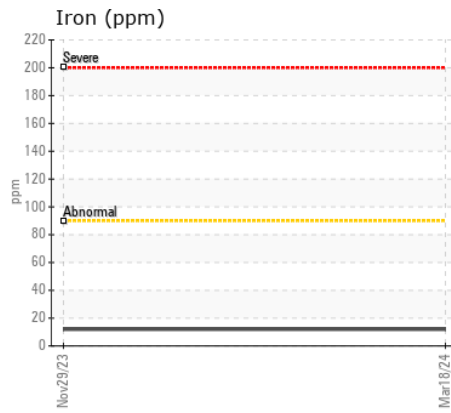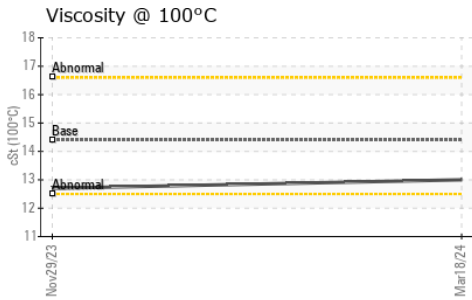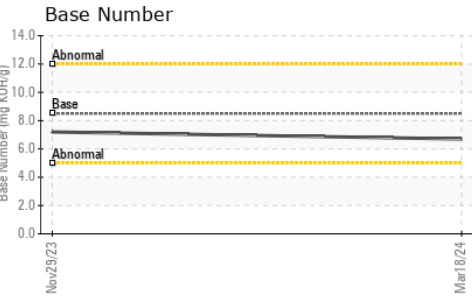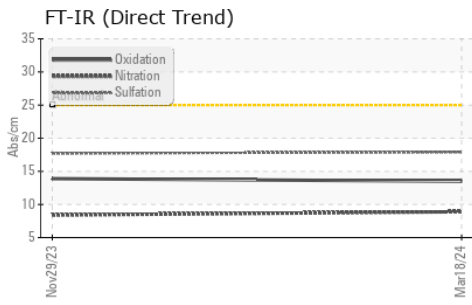

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0905760 **Received** : 23 May 2024
Lab Number : 06189010 **Tested** : 24 May 2024
Unique Number : 11045762 **Diagnosed** : 24 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

WAKE COUNTY PUBLIC SCHOOL SYSTEM
 1551 ROCK QUARRY ROAD
 RALEIGH, NC
 US 27610
 Contact: DEVIN WEBER
 dweber@wcpss.net
 T: (919)856-8076
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)