



# OIL ANALYSIS REPORT

|                 |           |
|-----------------|-----------|
| WEAR            | NORMAL    |
| CONTAMINATION   | NORMAL    |
| FLUID CONDITION | ATTENTION |

Machine Id  
**1849**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- QTS)**

## RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

| Test           | UOM | Method      | Limit/Abn | Current            | History1    | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|----------|
| Sample Number  |     | Client Info |           | <b>WC0905842</b>   | WC0870712   | ---      |
| Sample Date    |     | Client Info |           | <b>08 Mar 2024</b> | 14 Dec 2023 | ---      |
| Machine Age    | mls | Client Info |           | <b>10846</b>       | 4245        | ---      |
| Oil Age        | mls | Client Info |           | <b>0</b>           | 0           | ---      |
| Filter Age     | mls | Client Info |           | <b>0</b>           | 0           | ---      |
| Oil Changed    |     | Client Info |           | <b>Not Changd</b>  | Not Changd  | ---      |
| Filter Changed |     | Client Info |           | <b>Not Changd</b>  | Not Changd  | ---      |
| Sample Status  |     |             |           | <b>ATTENTION</b>   | ABNORMAL    | ---      |

## WEAR

Metal levels are typical for a new component breaking in.

|              |        |             |      |              |      |     |
|--------------|--------|-------------|------|--------------|------|-----|
| Iron         | ppm    | ASTM D5185m | >100 | <b>59</b>    | 43   | --- |
| Chromium     | ppm    | ASTM D5185m | >20  | <b>2</b>     | 1    | --- |
| Nickel       | ppm    | ASTM D5185m | >4   | <b>&lt;1</b> | <1   | --- |
| Titanium     | ppm    | ASTM D5185m |      | <b>&lt;1</b> | <1   | --- |
| Silver       | ppm    | ASTM D5185m | >3   | <b>&lt;1</b> | 0    | --- |
| Aluminum     | ppm    | ASTM D5185m | >20  | <b>25</b>    | 7    | --- |
| Lead         | ppm    | ASTM D5185m | >40  | <b>&lt;1</b> | 0    | --- |
| Copper       | ppm    | ASTM D5185m | >330 | <b>30</b>    | 41   | --- |
| Tin          | ppm    | ASTM D5185m | >15  | <b>1</b>     | <1   | --- |
| Vanadium     | ppm    | ASTM D5185m |      | <b>&lt;1</b> | 0    | --- |
| White Metal  | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | --- |
| Yellow Metal | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | --- |

## CONTAMINATION














Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

|                  |          |             |       |                |       |     |
|------------------|----------|-------------|-------|----------------|-------|-----|
| Silicon          | ppm      | ASTM D5185m | >25   | <b>33</b>      | 23    | --- |
| Potassium        | ppm      | ASTM D5185m | >20   | <b>74</b>      | ▲ 198 | --- |
| Fuel             |          | WC Method   | >5    | <b>&lt;1.0</b> | ▲ 2.1 | --- |
| Water            |          | WC Method   | >0.2  | <b>NEG</b>     | NEG   | --- |
| Glycol           |          | WC Method   |       | <b>NEG</b>     | NEG   | --- |
| Soot %           | %        | *ASTM D7844 | >3    | <b>0.5</b>     | 0.4   | --- |
| Nitration        | Abs/cm   | *ASTM D7624 | >20   | <b>11.9</b>    | 9.8   | --- |
| Sulfation        | Abs/.1mm | *ASTM D7415 | >30   | <b>21.9</b>    | 20.7  | --- |
| Silt             | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | --- |
| Debris           | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | --- |
| Sand/Dirt        | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | --- |
| Appearance       | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | --- |
| Odor             | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | --- |
| Emulsified Water | scalar   | *Visual     | >0.2  | <b>NEG</b>     | NEG   | --- |

## FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

|                  |          |             |      |               |        |     |
|------------------|----------|-------------|------|---------------|--------|-----|
| Sodium           | ppm      | ASTM D5185m | >158 | <b>7</b>      | 14     | --- |
| Boron            | ppm      | ASTM D5185m | 250  | <b>30</b>     | 21     | --- |
| Barium           | ppm      | ASTM D5185m | 10   | <b>5</b>      | 10     | --- |
| Molybdenum       | ppm      | ASTM D5185m | 100  | <b>48</b>     | 46     | --- |
| Manganese        | ppm      | ASTM D5185m |      | <b>6</b>      | 5      | --- |
| Magnesium        | ppm      | ASTM D5185m | 450  | <b>726</b>    | 767    | --- |
| Calcium          | ppm      | ASTM D5185m | 3000 | <b>1173</b>   | 1114   | --- |
| Phosphorus       | ppm      | ASTM D5185m | 1150 | <b>672</b>    | 728    | --- |
| Zinc             | ppm      | ASTM D5185m | 1350 | <b>866</b>    | 856    | --- |
| Sulfur           | ppm      | ASTM D5185m | 4250 | <b>2355</b>   | 2222   | --- |
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25  | <b>22.0</b>   | 19.1   | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896  | 8.5  | <b>5.8</b>    | 8.2    | --- |
| Visc @ 100°C     | cSt      | ASTM D445   | 14.4 | ● <b>11.1</b> | ● 11.2 | --- |

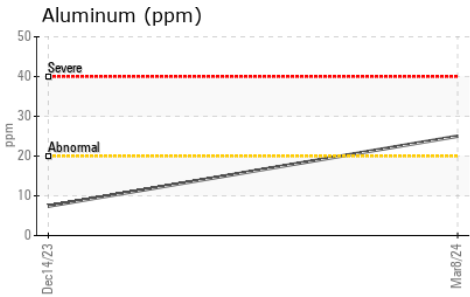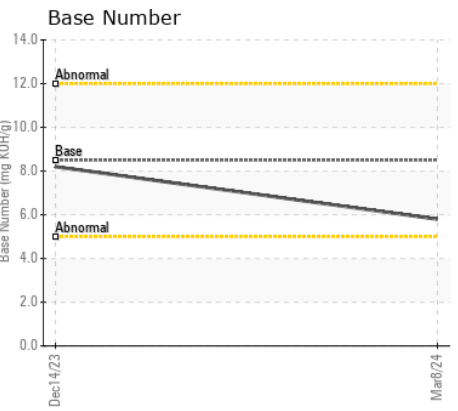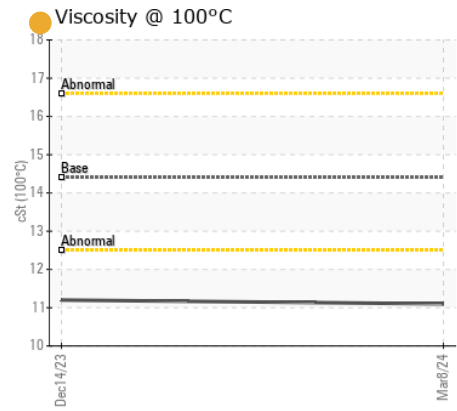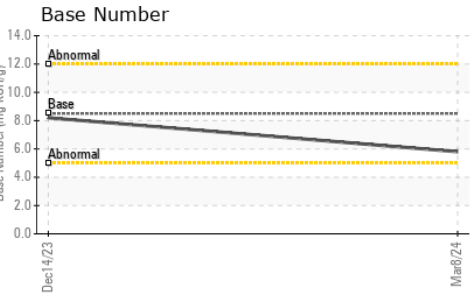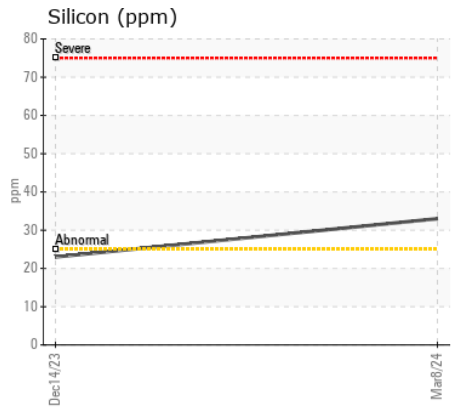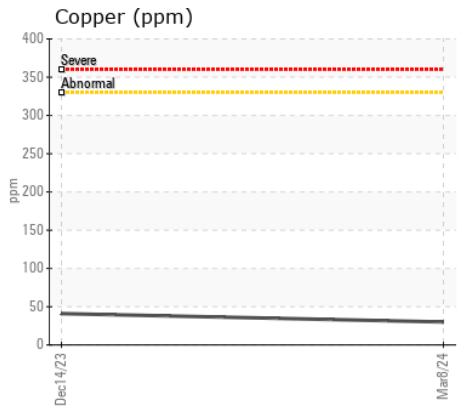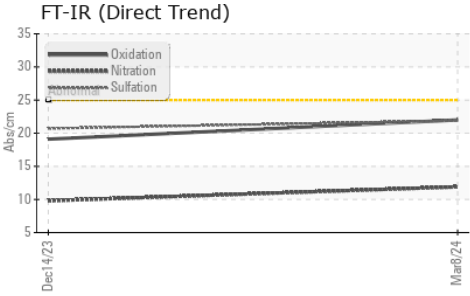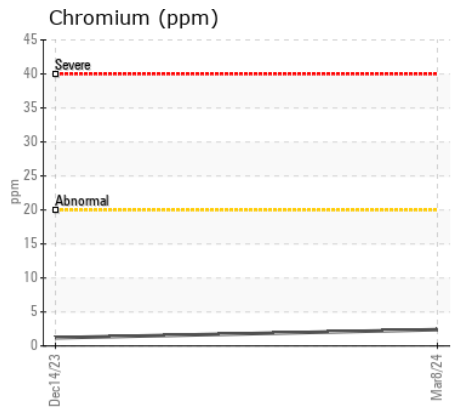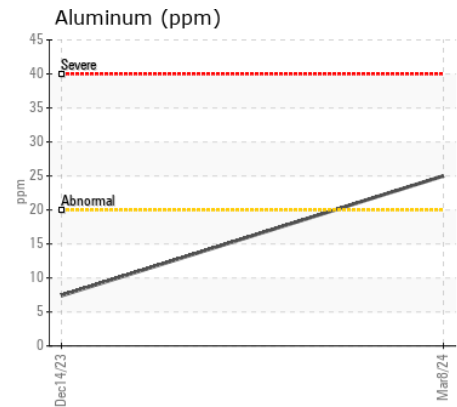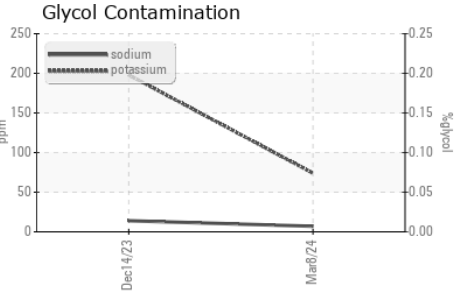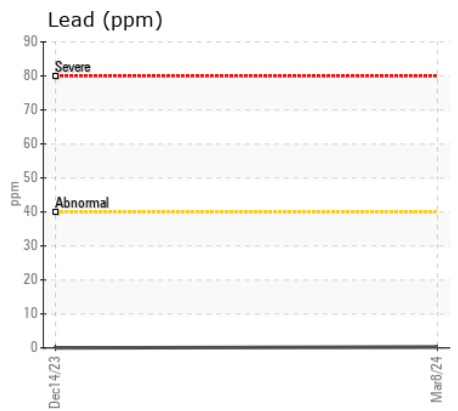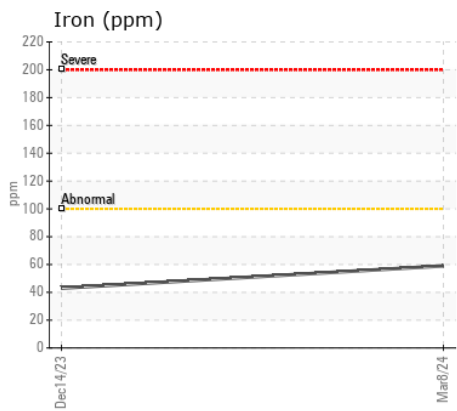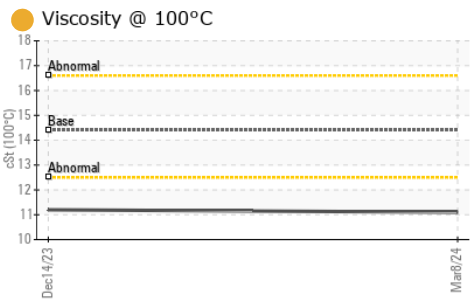

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0905842 **Received** : 23 May 2024  
**Lab Number** : 06189012 **Tested** : 24 May 2024  
**Unique Number** : 11045764 **Diagnosed** : 28 May 2024 - Sean Felton  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**WAKE COUNTY PUBLIC SCHOOL SYSTEM**  
 1551 ROCK QUARRY ROAD  
 RALEIGH, NC  
 US 27610  
 Contact: DEVIN WEBER  
 dweber@wcpss.net  
 T: (919)856-8076  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)