

Machine Id **1764** Component **Diesel Engine** Fluid **DIESEL ENGINE OIL SAE 15W40 (--- QTS)**

RECOMMENDATION	Test	UOM	Method	Limit/Abn	Current	History1	History2
Description of the most service interval to manifer Discourse (for the	Sample Number		Client Info		WC0932778	WC0870855	WC0821357
Resample at the next service interval to monitor. Please specify the component make and model with your next sample.	Sample Date		Client Info		01 May 2024	08 Nov 2023	16 Jul 2023
component make and model with your next sample.	Machine Age	mls	Client Info		64270	49317	40023
	Oil Age	mls	Client Info		0	0	0
	Filter Age	mls	Client Info		0	0	0
	Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
	Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
	Sample Status				NORMAL	MARGINAL	NORMAL
WEAR	Iron	ppm	ASTM D5185m		9	10	26
Metal levels are typical for a new component breaking in.	Chromium	ppm	ASTM D5185m	>20	<1	<1	1
metal levels are typical for a new component breaking in.	Nickel	ppm	ASTM D5185m	>4	<1	0	0
	Titanium	ppm	ASTM D5185m		<1	0	0
	Silver	ppm	ASTM D5185m	>3	2	0	0
	Aluminum	ppm	ASTM D5185m	>20	9	8	24
	Lead	ppm	ASTM D5185m	>40	<1	0	0
	Copper	ppm	ASTM D5185m	>330	1	1	4

Tin

Vanadium

White Metal

Yellow Metal

Potassium

Silicon

CONTAMINATION

Elevated aluminum (AI) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

	ppm	ASTIVI DOTODITI	>20	15	14	55
Fuel		WC Method	>5	<1.0	A 3.1	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.3	0.5
Nitration	Abs/cm	*ASTM D7624	>20	8.5	9.0	11.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.1	18.7	22.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Sodium	ppm	ASTM D5185m	>158	2	2	2
Boron	ppm	ASTM D5185m	250	104	36	21
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	88	79	79
Manganese	ppm	ASTM D5185m		<1		
manganooo	ppin	ASTIVI DOTODITI		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	82	<1 123	<1 139
0			450 3000			
Magnesium	ppm	ASTM D5185m		82	123	139
Magnesium Calcium	ppm ppm	ASTM D5185m ASTM D5185m	3000	82 1995	123 1982	139 2166
Magnesium Calcium Phosphorus	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	3000 1150	82 1995 979	123 1982 992	139 2166 996
Magnesium Calcium Phosphorus Zinc	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	3000 1150 1350	82 1995 979 1161	123 1982 992 1156	139 2166 996 1230
Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	3000 1150 1350 4250	82 1995 979 1161 3591	123 1982 992 1156 3458	139 2166 996 1230 4311

ASTM D5185m >15

ASTM D5185m >25

NONE

NONE

ASTM D5185m

*Visual

*Visual

ppm ASTM D5185m >20

ppm

ppm

scalar

scalar

ppm

1

<1

6

13

NONE

NONE

0

<1

5

14

NONE

NONE

0

0

7


55

NONE

NONE

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

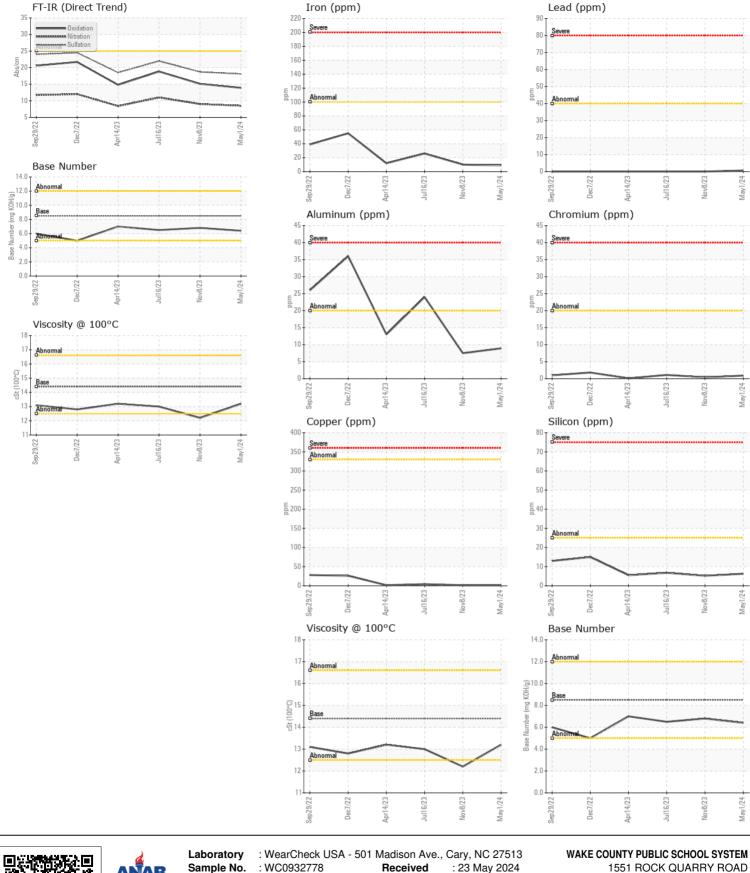

Sample No. Received : WC0932778 : 23 May 2024 Tested Lab Number : 06189023 RALEIGH, NC : 24 May 2024 : 24 May 2024 - Wes Davis US 27610 Unique Number : 11045775 Diagnosed Test Package : MOB 1 (Additional Tests: TBN) Contact: DEVIN WEBER Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. dweber@wcpss.net * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: (919)856-8076 F: x: Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: DEVIN WEBER - WCPRAL Page 2 of 2