MOB I

WEAR CHECK

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
1836
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

WEAR

Metal levels are typical for a new component breaking in.

CONTAMINATION

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		**WC0932795**	WC0870829	---
Sample Date		Client Info		**09 May 2024**	09 Jan 2023	---
Machine Age	mls	Client Info		**19171**	96117	---
Oil Age	mls	Client Info		**0**	0	---
Filter Age	mls	Client Info		**0**	0	---
Oil Changed		Client Info		**Not Changd**	Not Changd	---
Filter Changed		Client Info		**Not Changd**	Not Changd	---
Sample Status				**NORMAL**	NORMAL	---
Iron	ppm	ASTM D5185m	>100	**21**	20	---
Chromium	ppm	ASTM D5185m	>20	**1**	<1	---
Nickel	ppm	ASTM D5185m	>4	**<1**	<1	---
Titanium	ppm	ASTM D5185m		**<1**	0	---
Silver	ppm	ASTM D5185m	>3	**<1**	0	---
Aluminum	ppm	ASTM D5185m	>20	**21**	15	---
Lead	ppm	ASTM D5185m	>40	**<1**	0	---
Copper	ppm	ASTM D5185m	>330	**6**	15	---
Tin	ppm	ASTM D5185m	>15	**1**	<1	---
Vanadium	ppm	ASTM D5185m		**<1**	0	---
White Metal	scalar	*Visual	NONE	**NONE**	NONE	---
Yellow Metal	scalar	*Visual	NONE	**NONE**	NONE	---
Silicon	ppm	ASTM D5185m	>25	**8**	9	---
Potassium	ppm	ASTM D5185m	>20	**49**	48	---
Fuel		WC Method	>5	**<1.0**	<1.0	---
Water		WC Method	>0.2	**NEG**	NEG	---
Glycol		WC Method		**NEG**	NEG	---
Soot %	%	*ASTM D7844	>3	**0.3**	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	**9.2**	9.7	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	**18.3**	18.7	---
Silt	scalar	*Visual	NONE	**NONE**	NONE	---
Debris	scalar	*Visual	NONE	**NONE**	NONE	---
Sand/Dirt	scalar	*Visual	NONE	**NONE**	NONE	---
Appearance	scalar	*Visual	NORML	**NORML**	NORML	---
Odor	scalar	*Visual	NORML	**NORML**	NORML	---
Emulsified Water	scalar	*Visual	>0.2	**NEG**	NEG	---
Sodium	ppm	ASTM D5185m	>158	**2**	2	---
Boron	ppm	ASTM D5185m	250	**57**	45	---
Barium	ppm	ASTM D5185m	10	**0**	0	---
Molybdenum	ppm	ASTM D5185m	100	**95**	79	---
Manganese	ppm	ASTM D5185m		**<1**	<1	---
Magnesium	ppm	ASTM D5185m	450	**78**	152	---
Calcium	ppm	ASTM D5185m	3000	**2268**	1963	---
Phosphorus	ppm	ASTM D5185m	1150	**1162**	1007	---
Zinc	ppm	ASTM D5185m	1350	**1326**	1182	---
Sulfur	ppm	ASTM D5185m	4250	**4185**	4021	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	**13.9**	14.9	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	**6.6**	6.8	---
Visc @ 100°C	cSt	ASTM D445	14.4	**13.3**	12.8	---

FT-IR (Direct Trend)

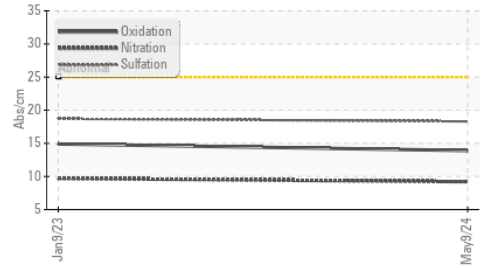

Base Number

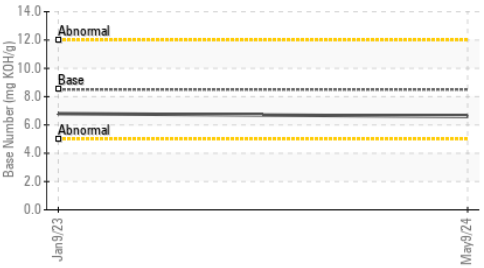

Viscosity @ 100°C

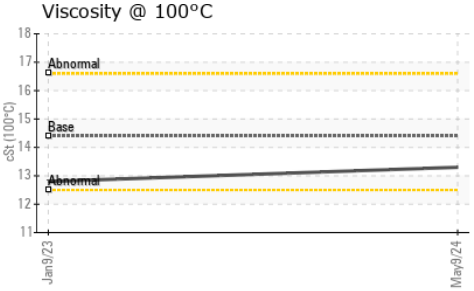

Iron (ppm)

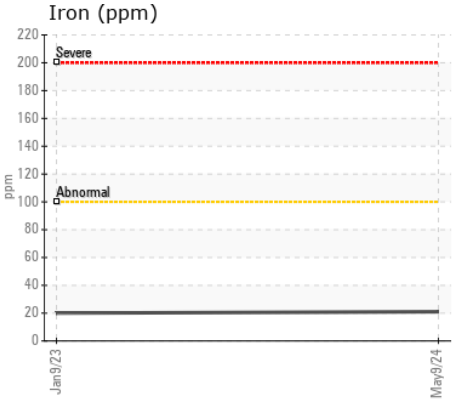

Lead (ppm)

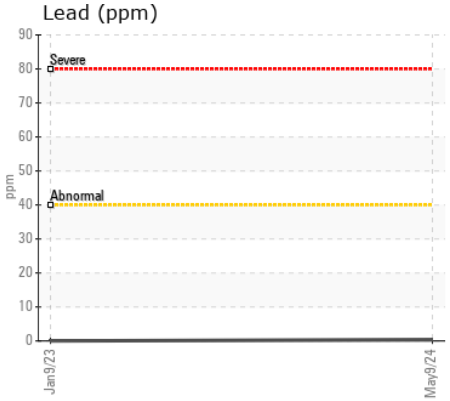

Aluminum (ppm)

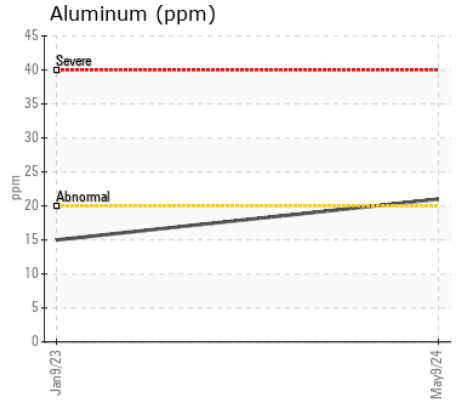

Chromium (ppm)

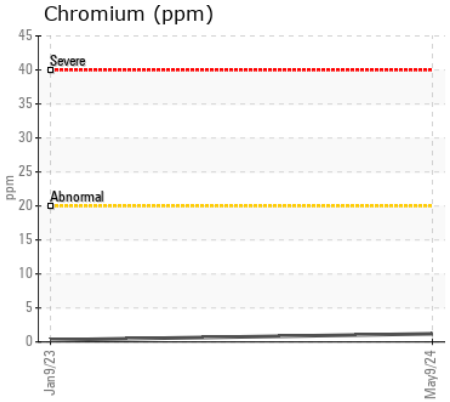

Copper (ppm)

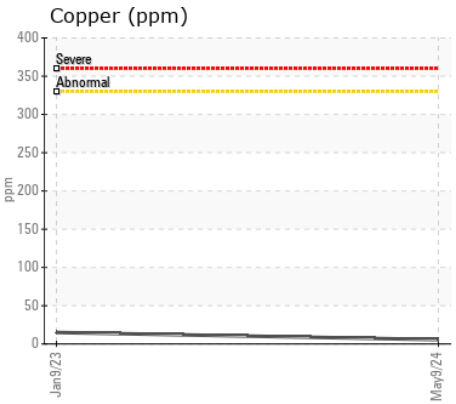

Silicon (ppm)

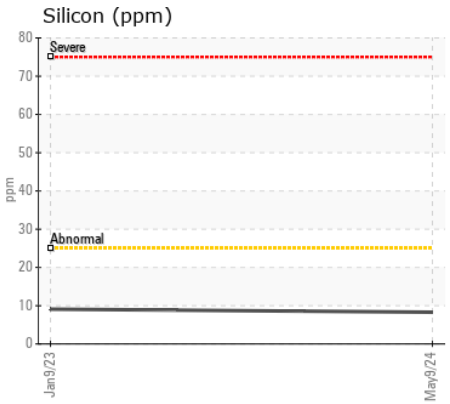

Viscosity @ 100°C

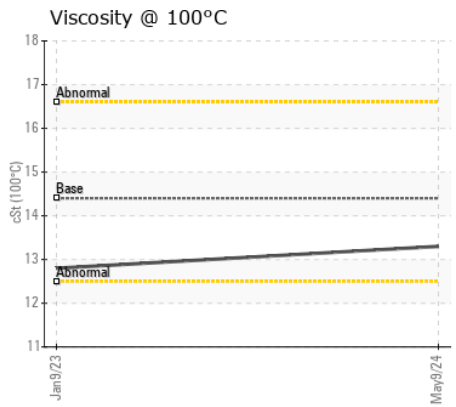

Base Number

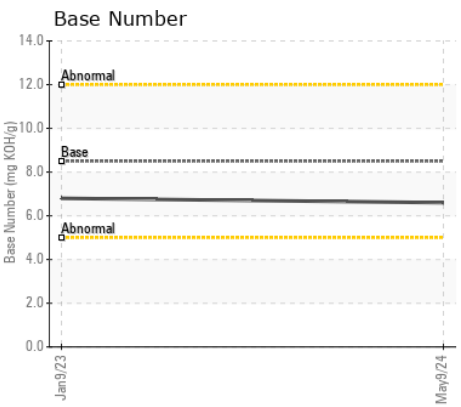

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0932795
Lab Number : 06189056
Unique Number : 11045808
Test Package : MOB 1 (Additional Tests: TBN)

Received : 23 May 2024
Tested : 24 May 2024
Diagnosed : 24 May 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

WAKE COUNTY PUBLIC SCHOOL SYSTEM
1551 ROCK QUARRY ROAD
RALEIGH, NC
US 27610
Contact: DEVIN WEBER
dweber@wcpss.net
T: (919)856-8076
F: x: