



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**INTERNATIONAL 1299**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0932854</b>	WC0792851	WC0681269
Sample Date		Client Info		<b>10 May 2024</b>	16 Mar 2023	15 Mar 2022
Machine Age	mls	Client Info		<b>214029</b>	204075	187683
Oil Age	mls	Client Info		<b>0</b>	0	0
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>24</b>	29	37
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	1	2
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>6</b>	2	3
Lead	ppm	ASTM D5185m	>40	<b>1</b>	2	2
Copper	ppm	ASTM D5185m	>330	<b>2</b>	2	3
Tin	ppm	ASTM D5185m	>15	<b>1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>8</b>	8	6
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	<1
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.5	0.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.3</b>	10.8	13.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.4</b>	21.2	26.3
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<b>2</b>	<1	5
Boron	ppm	ASTM D5185m	250	<b>28</b>	23	27
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>87</b>	90	90
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>363</b>	235	54
Calcium	ppm	ASTM D5185m	3000	<b>2005</b>	2270	2411
Phosphorus	ppm	ASTM D5185m	1150	<b>1130</b>	1167	1124
Zinc	ppm	ASTM D5185m	1350	<b>1323</b>	1393	1297
Sulfur	ppm	ASTM D5185m	4250	<b>3838</b>	3896	3521
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.5</b>	17.8	21.6
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>6.9</b>	5.6	6.5
Visc @ 100°C	cSt	ASTM D445	14.4	<b>14.3</b>	14.1	14.4

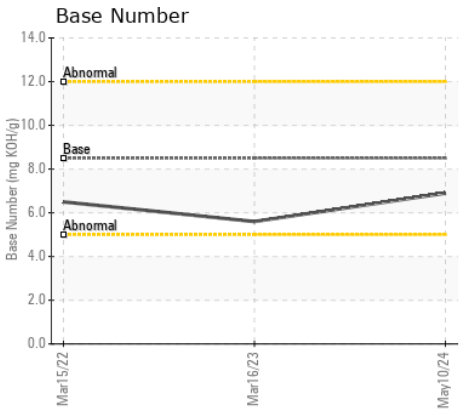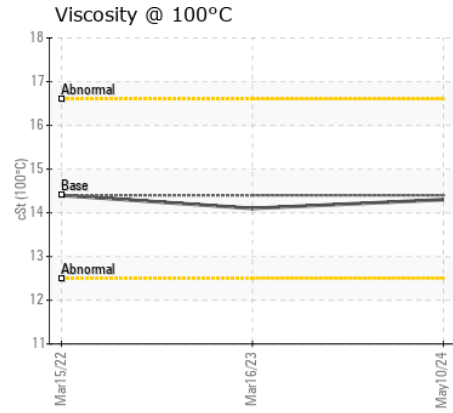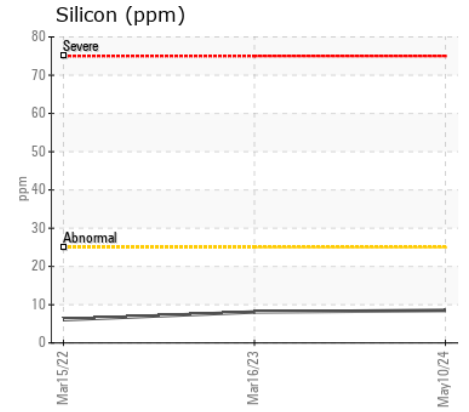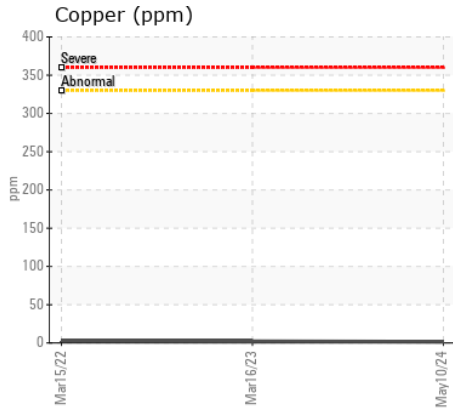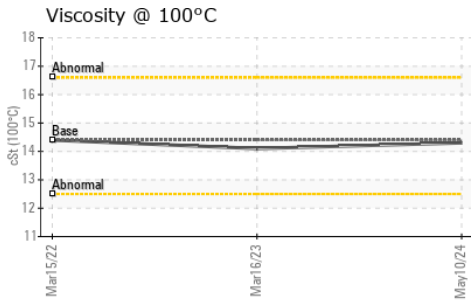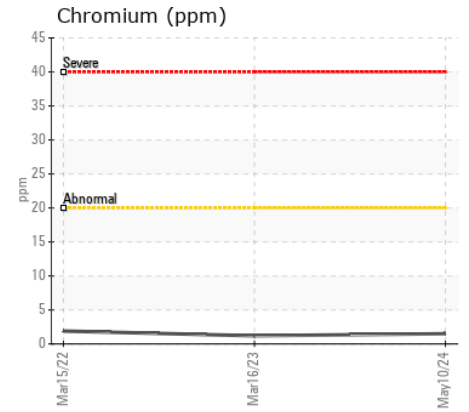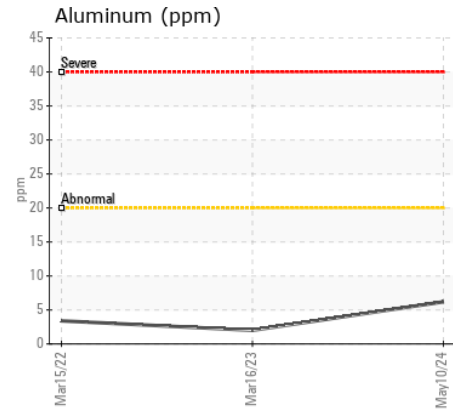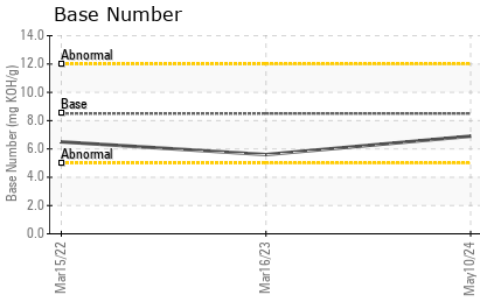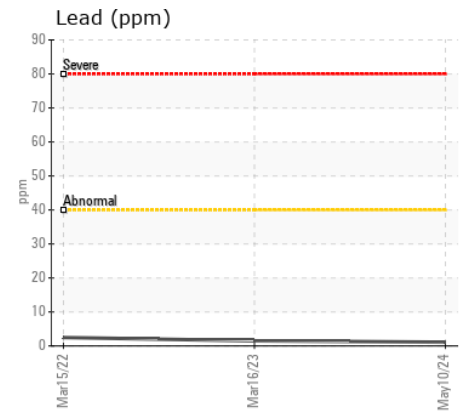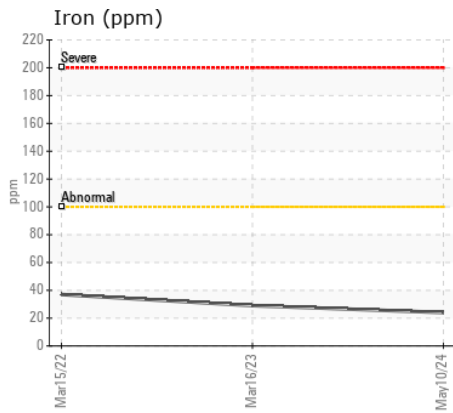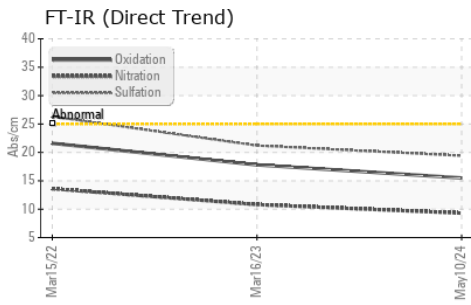

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0932854 **Received** : 23 May 2024  
**Lab Number** : 06189060 **Tested** : 24 May 2024  
**Unique Number** : 11045812 **Diagnosed** : 24 May 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**WAKE COUNTY PUBLIC SCHOOL SYSTEM**  
 1551 ROCK QUARRY ROAD  
 RALEIGH, NC  
 US 27610  
 Contact: DEVIN WEBER  
 dweber@wcpss.net  
 T: (919)856-8076  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)