



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**5WM/ST/JPBD**  
 Component  
**Gearbox**  
 Fluid  
**MOBIL MOBILGEAR SHC XMP 320 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0932107</b>	WC0807385	WC0807312
Sample Date		Client Info		<b>09 Apr 2024</b>	20 Sep 2023	06 Apr 2023
Machine Age	mths	Client Info		<b>0</b>	0	33
Oil Age	mths	Client Info		<b>43</b>	37	0
Filter Age	mths	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	<b>21</b>	17	17
Chromium	ppm	ASTM D5185m	>15	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>15	<b>0</b>	1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	<1	0
Lead	ppm	ASTM D5185m	>100	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m	>200	<b>&lt;1</b>	0	<1
Tin	ppm	ASTM D5185m	>25	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>6</b>	5	4
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	1
Water	%	ASTM D6304	>0.2	<b>NEG</b>	NEG	NEG
Particles >4µm		ASTM D7647	>20000	<b>3468</b>	1161	2394
Particles >6µm		ASTM D7647	>5000	<b>864</b>	234	511
Particles >14µm		ASTM D7647	>640	<b>75</b>	13	36
Particles >21µm		ASTM D7647	>160	<b>20</b>	5	11
Particles >38µm		ASTM D7647	>40	<b>1</b>	0	1
Particles >71µm		ASTM D7647	>10	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>21/19/16	<b>19/17/13</b>	17/15/11	18/16/12
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>15	<b>2</b>	<1	0
Boron	ppm	ASTM D5185m	0	<b>0</b>	0	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	1	<1
Calcium	ppm	ASTM D5185m	0	<b>0</b>	1	0
Phosphorus	ppm	ASTM D5185m	485	<b>501</b>	433	473
Zinc	ppm	ASTM D5185m	0	<b>10</b>	<1	<1
Sulfur	ppm	ASTM D5185m		<b>5862</b>	4533	5909
Acid Number (AN)	mg KOH/g	ASTM D8045	0.85	<b>1.01</b>	1.00	0.91
Visc @ 40°C	cSt	ASTM D445	335	<b>338</b>	340	339
Visc @ 100°C	cSt	ASTM D445	38.3	<b>37.5</b>	37.7	37.7
Viscosity Index (VI)	Scale	ASTM D2270	164	<b>159</b>	159	160

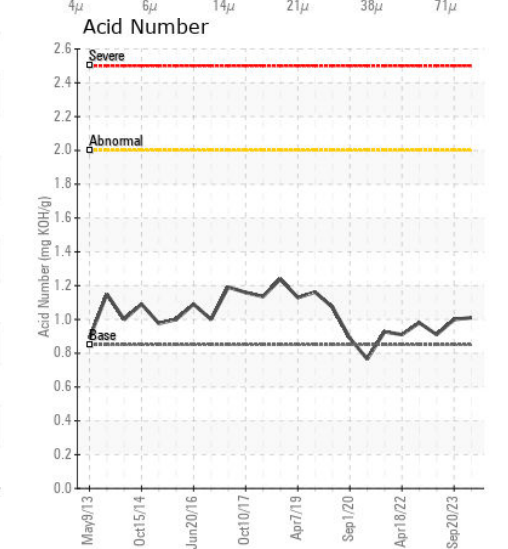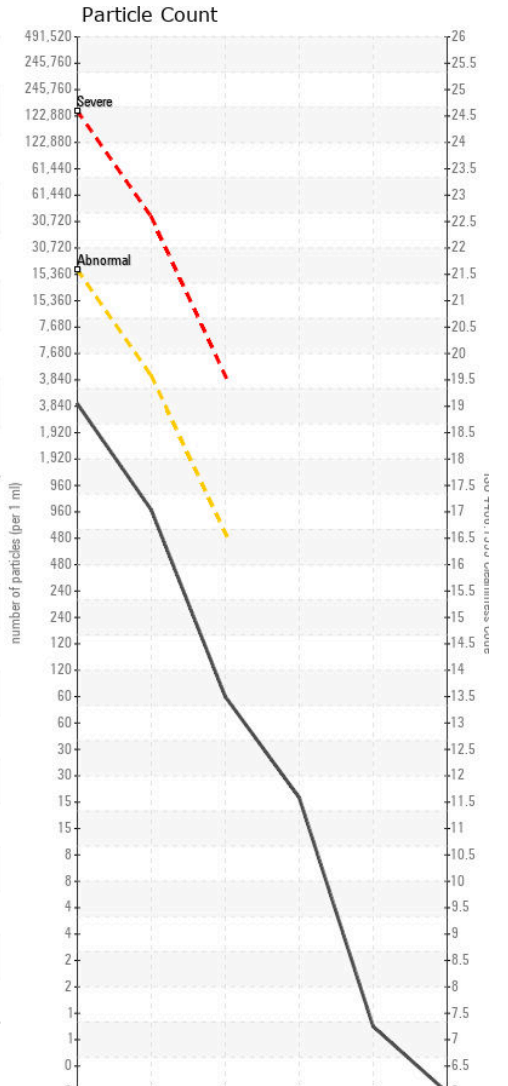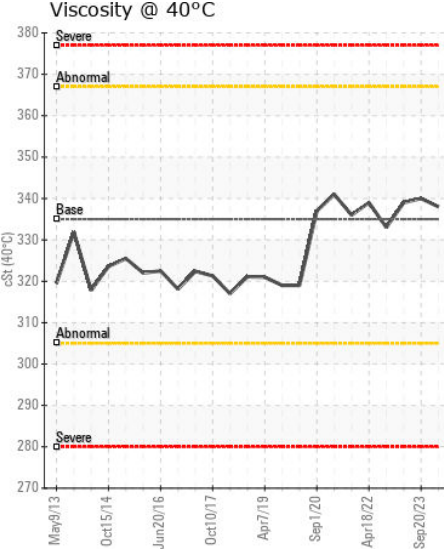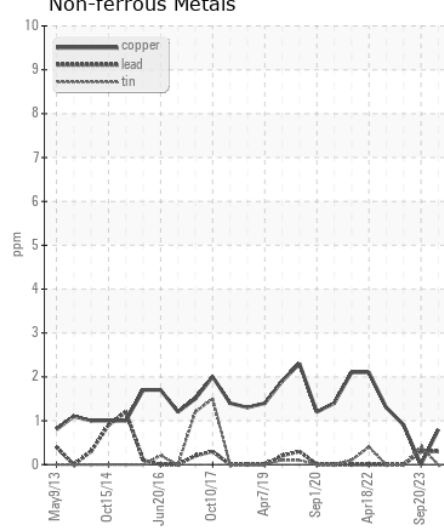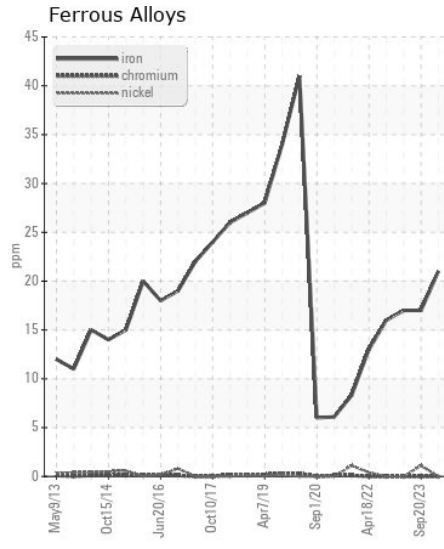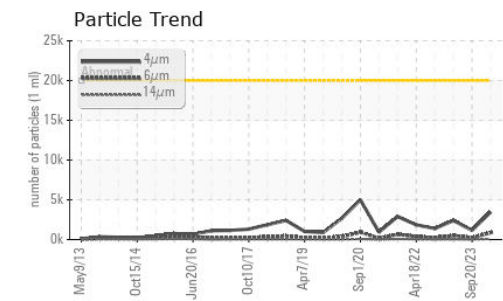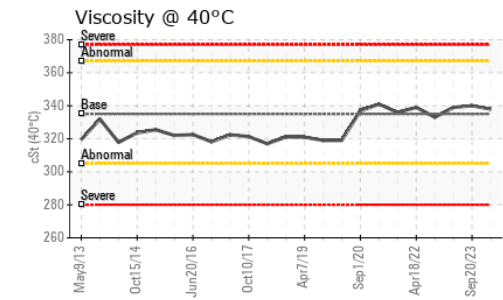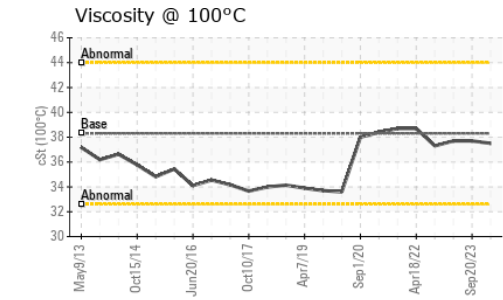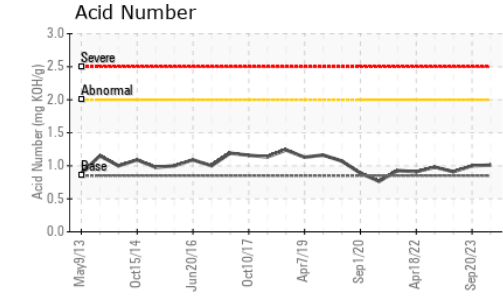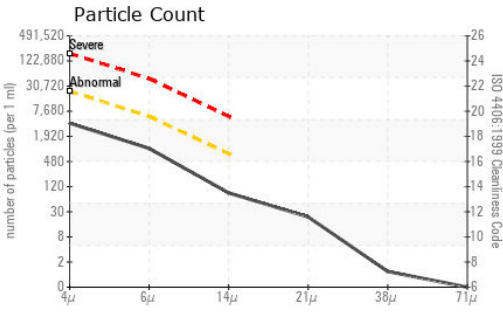

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0932107 **Received** : 23 May 2024  
**Lab Number** : 06189160 **Tested** : 28 May 2024  
**Unique Number** : 11045912 **Diagnosed** : 28 May 2024 - Don Baldrige  
**Test Package** : PLANT ( Additional Tests: KV100, VI )

**JPHYTEC**

JP  
Contact: Service

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)