



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	SEVERE
FLUID CONDITION	NORMAL



Area
Store 5 - Cross Lanes
Machine Id
JOHN DEERE 318D 1T0318DALCG235284
Component
Right Chain Case
Fluid
JOHN DEERE HY-GARD HYD/TRANS (4 GAL)

RECOMMENDATION

We advise that you check for the source of water entry. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0046570	---	---
Sample Date		Client Info		21 May 2024	---	---
Machine Age	hrs	Client Info		250	---	---
Oil Age	hrs	Client Info		250	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				SEVERE	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		35	---	---
Iron	ppm	ASTM D5185m	>632	53	---	---
Chromium	ppm	ASTM D5185m	>3	<1	---	---
Nickel	ppm	ASTM D5185m	>3	1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>19	3	---	---
Lead	ppm	ASTM D5185m	>6	<1	---	---
Copper	ppm	ASTM D5185m	>46	2	---	---
Tin	ppm	ASTM D5185m	>3	2	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is a high concentration of water present in the oil.

Silicon	ppm	ASTM D5185m	>82	8	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water	%	ASTM D6304	>0.2	▲ 9.00	---	---
ppm Water	ppm	ASTM D6304	>2000	▲ 90000	---	---
Silt	scalar	*Visual	NONE	MODER	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	● MILKY	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	▲ 0.2%	---	---

FLUID CONDITION

The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185m		10	---	---
Boron	ppm	ASTM D5185m	6	11	---	---
Barium	ppm	ASTM D5185m	0	5	---	---
Molybdenum	ppm	ASTM D5185m	0	2	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m	145	191	---	---
Calcium	ppm	ASTM D5185m	3570	1006	---	---
Phosphorus	ppm	ASTM D5185m	1290	1002	---	---
Zinc	ppm	ASTM D5185m	1640	1371	---	---
Sulfur	ppm	ASTM D5185m		4028	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	81.7	---	---

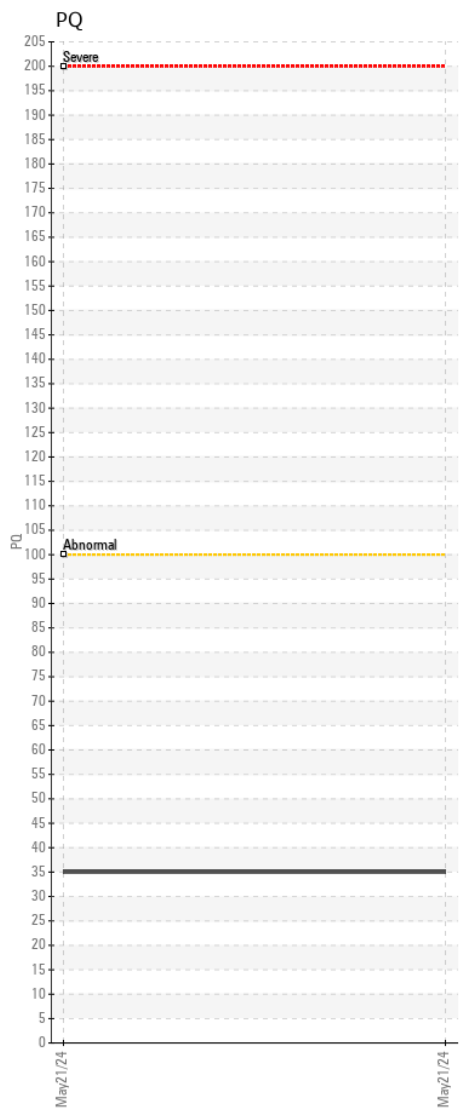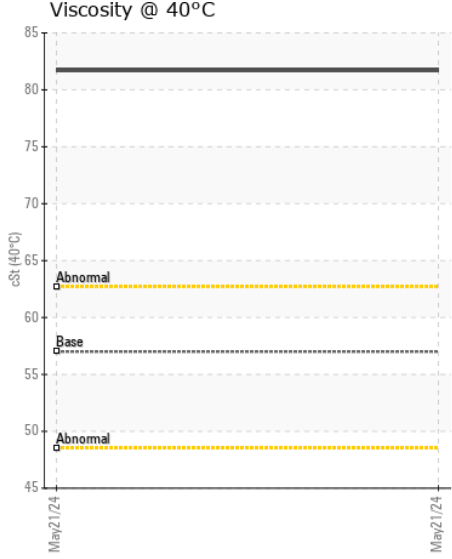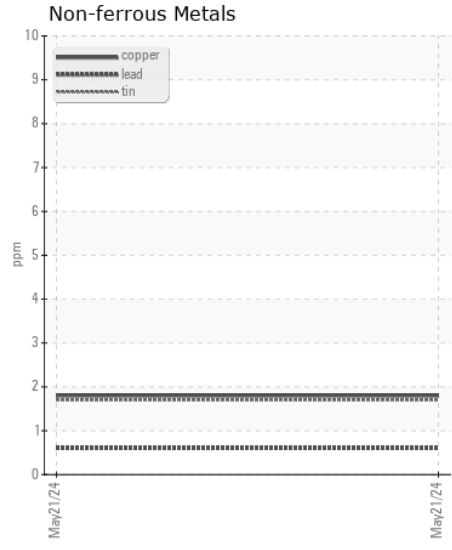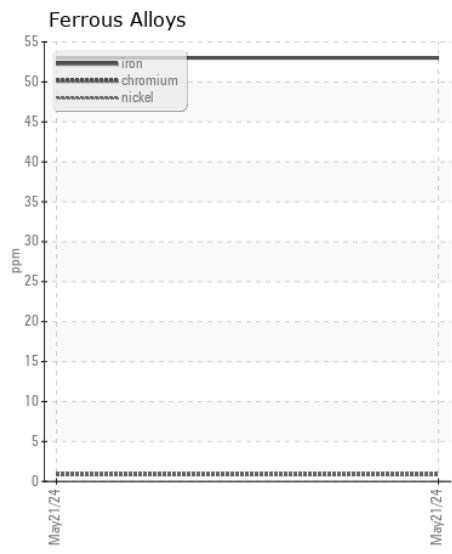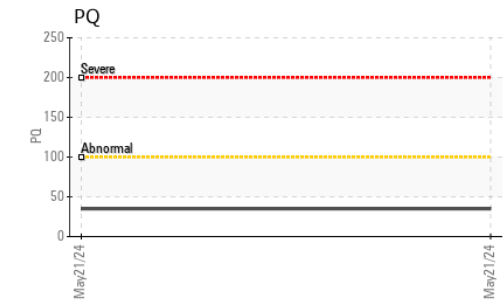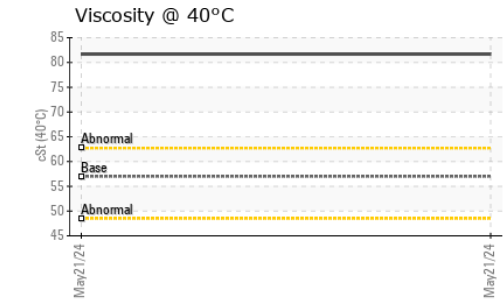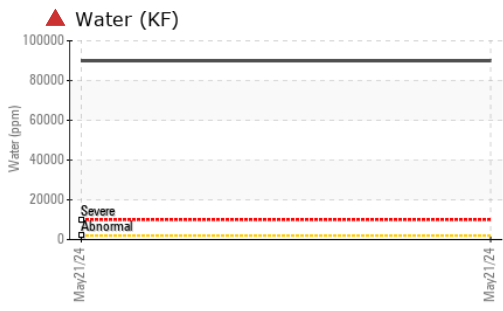

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0046570 **Received** : 23 May 2024
Lab Number : 06189503 **Tested** : 28 May 2024
Unique Number : 11046255 **Diagnosed** : 28 May 2024 - Don Baldrige
Test Package : CONST (Additional Tests: KF, PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (740)373-5570